

ON Semiconductor

Is Now



To learn more about onsemi™, please visit our website at
www.onsemi.com

onsemi and onsemi. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application, Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that onsemi was negligent regarding the design or manufacture of the part. onsemi is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner. Other names and brands may be claimed as the property of others.

STK534U3xx series



ON Semiconductor®

www.onsemi.com

Application Note

1. Product synopsis

This application handbook is intended to provide practical guidelines for the **STK534U3xx series** use.

The **STK534U3xx series** is Intelligent Power Module (IPM) based upon ON's Insulated Metal Substrate Technology (IMST) for 3-phase motor drives which contain the main power circuitry and the supporting control circuitry. The key functions are outlined below:

- Highly integrated device containing all High Voltage (HV) control from HV-DC to 3-phase outputs in a single small SIP module.
- Output stage uses IGBT/FRD technology and implements Under Voltage Protection (UVP) and Over Current Protection (OCP) with a Fault Detection output flag. Internal Boost diodes are provided for high side gate boost drive.
- Option of a combined or individual shunt resistor per phase for OCP.
- Externally accessible embedded thermistor for substrate temperature measurement.
- All control inputs and status outputs are at low voltage levels directly compatible with microcontrollers.
- Single control power supply due to internal bootstrap circuit for high side pre-driver circuit.
- Mounting points are available on SIP package

A simplified block diagram of a motor control system is shown in Figure 1.

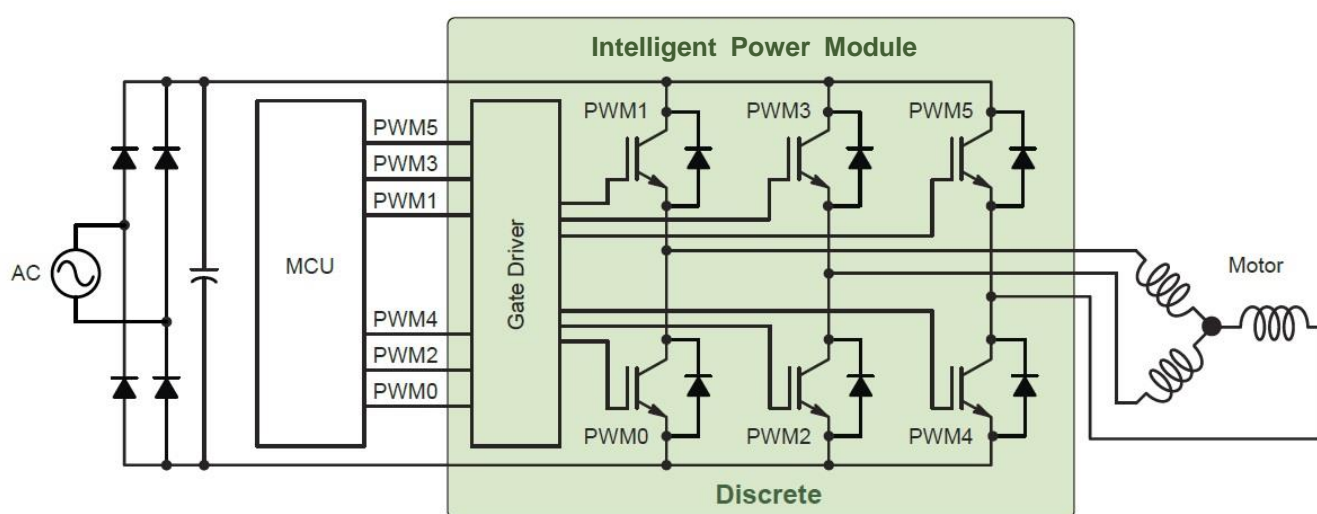


Figure 1. Motor Control System Block Diagram

3. Performance test guidelines

The following Chapter gives performance test method shown in Figures 3 to 7.

3.1. Switching time definition and performance test method

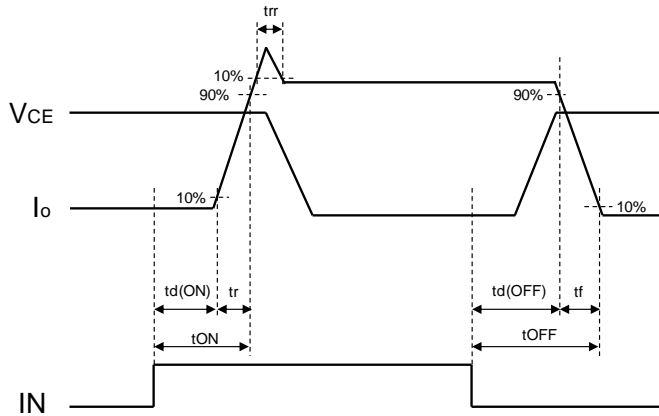


Figure 3. Switching time definition

Ex) Lower side U phase measurement

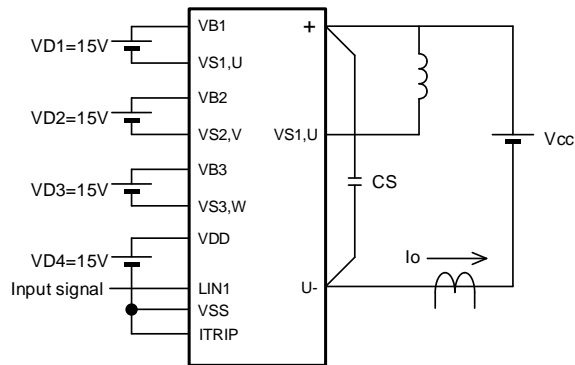


Figure 4. Evaluation circuit (Inductive load)

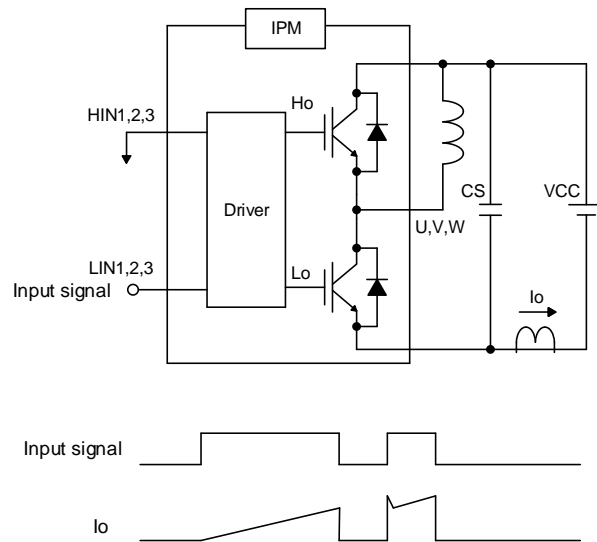


Figure 5. Switching loss circuit

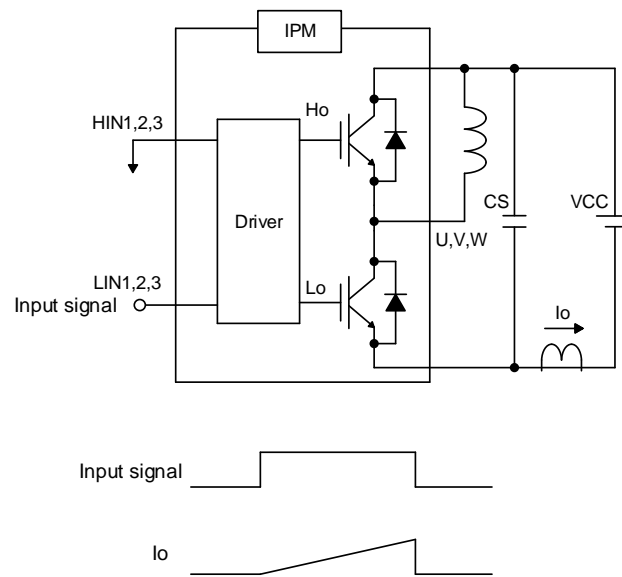


Figure 6. R.B.SOA circuit

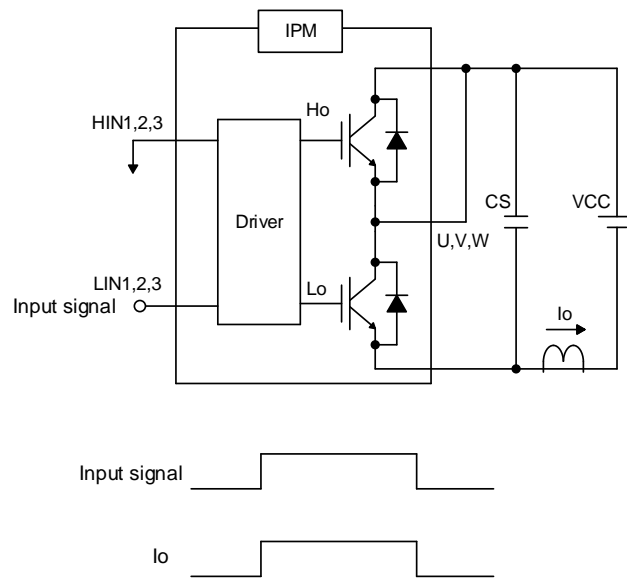


Figure 7. S.C.SOA circuit

3.2. Thermistor Characteristics

The thermistor is built-in between TH and VSS. This is used to sense internal module temperature. Its characteristic is outlined below.

Parameter	Symbol	Condition	Min	Typ.	Max	Unit
Resistance	R ₂₅	T _c =25°C	97	100	103	kΩ
Resistance	R ₁₀₀	T _c =100°C	5.07	5.38	5.71	kΩ
B-Constant(25-50°C)	B		4208	4250	4293	K
Temperature Range			-40		+125	°C

Table 2. NTC Thermistor value

R₂₅ is the value of the integrated NTC thermistor at T_c=25°C. The resistance value is 100kΩ±3% and the value of the B-Constant (25-50°C) is 4250K±1%. The temperature depended value is calculated as shown in the formula.

$$R(t) = R_{25} \times e^{B\left(\frac{1}{T} - \frac{1}{298}\right)}$$

The resulting in the NTC values over temperatures

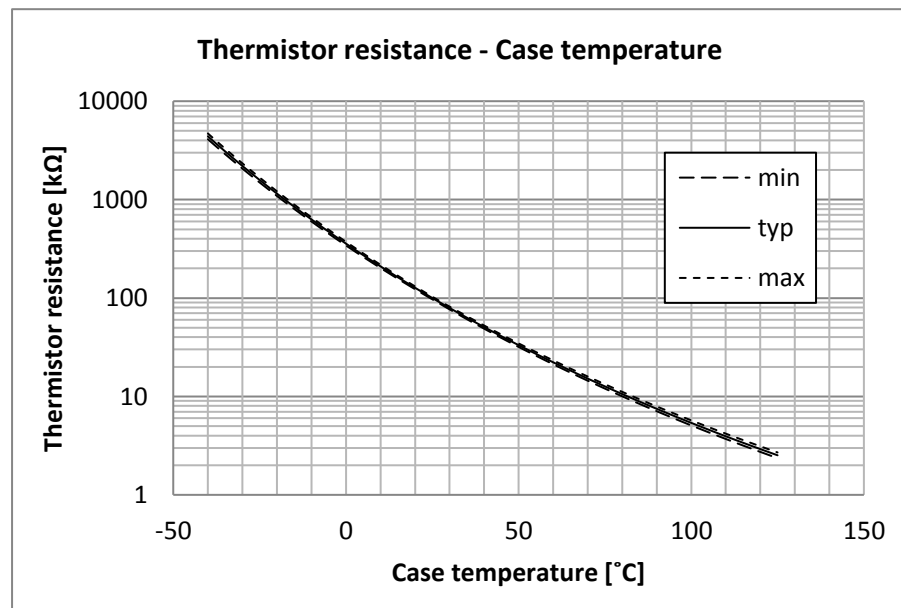


Figure 8. typical NTC value over temperature

4. Protective functions and Operation Sequence

This chapter describes the protection features.

- over current protection
- short circuit protection
- under Voltage Lockout (UVLO) protection
- cross conduction prevention

4.1. Over current protection

In difference to the internal single shunt series modules the STK534Uxxx series modules utilize an external shunt resistor for the OCP functionality. As shown in Figure 9 the emitters of all three lower side IGBTs brought out to module pins. An external “over current protection circuitry” consisting of the shunt resistor and an RC filter network define the trip level.

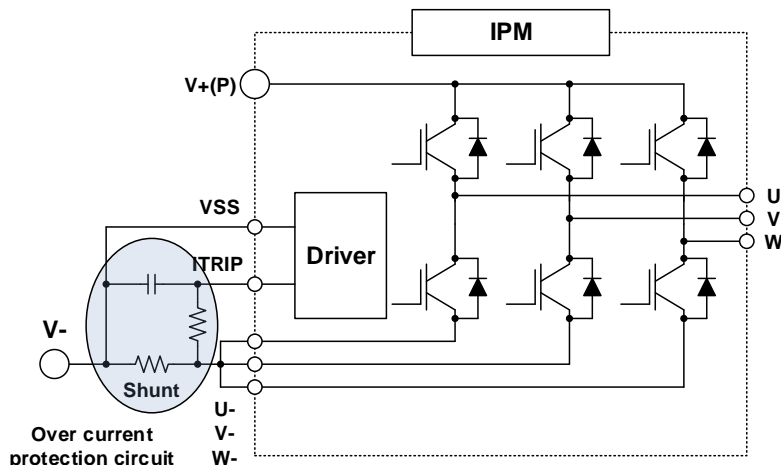


Figure 9. Over-current protection circuit setting

The OCP function is implemented by comparing the voltage on the Itrip input to an internal reference of 0.49V (typ). In case the voltage on this terminal i.e. across the shunt resistor exceeds the trip level an OCP fault is triggered.

Note: The current value of the OCP needs to be set by correctly sizing the external shunt resistor to less than 2x of the modules rated current.

In case of an OCP event all internal gate drive signal for the IGBTs of all three phases become inactive and the FLT/EN fault signal output is activated (low).

An RC filter is used on the Itrip input to prevent an erroneous OCP detection due to normal switching noise and/or recovery diode current. The time constant of that RC filter should be set to a value between 1.5 μ s to 2 μ s. In any case the time constant must be shorter than the IGBTs short current safe operating area (SCSOA). Please refer to Data Sheet for SCSOA. The resulting OCP level due to the filter time constant is shown in Figure 10.

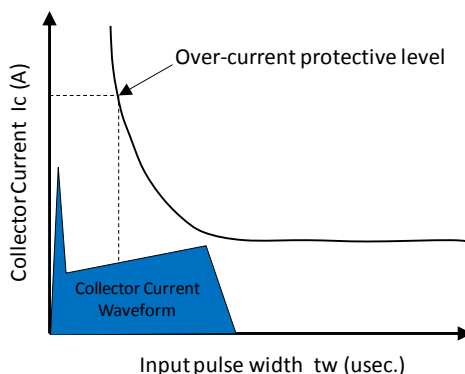


Figure 10. filter time constant

STK534U3xx series Application Note

For optimal performance all traces around the shunt resistor need to be kept as short as possible

Figure 11. shows the sequence of events in case of an OCP event.

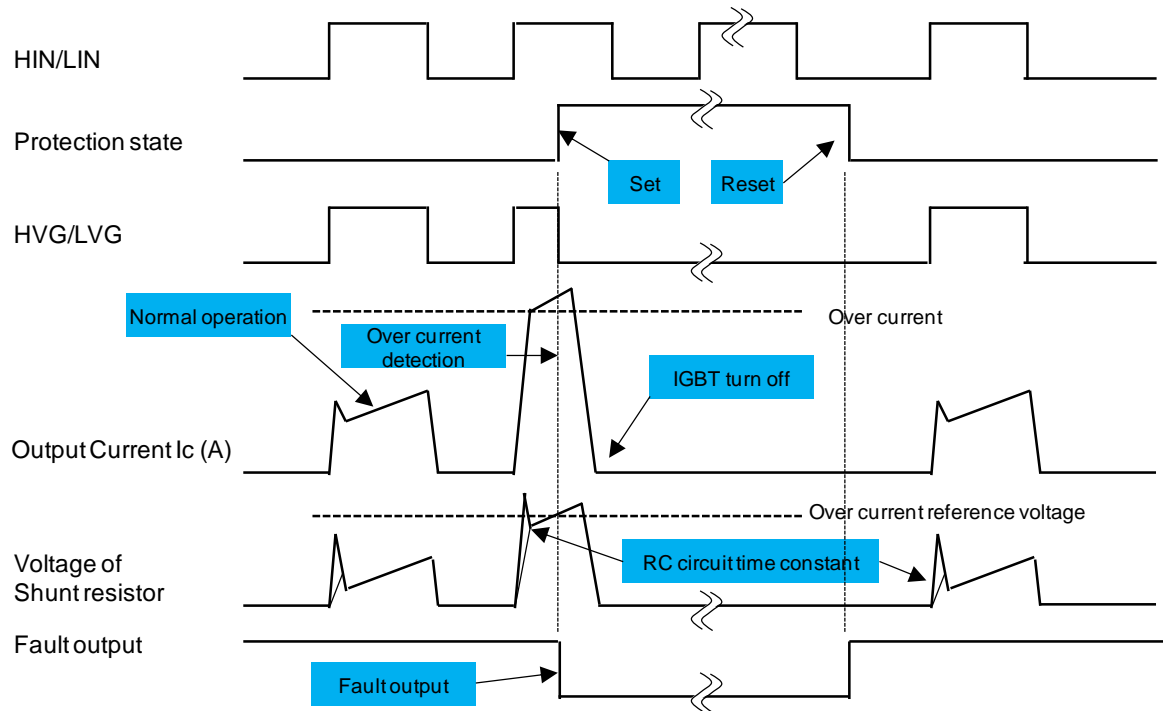


Figure 11. Over current protection Timing chart

4.2. Under Voltage Lockout Protection

The UVLO protection is designed to prevent unexpected operating behavior as described in Table 3. Both High-side and Low-side have UV protecting function. However the fault signal output only corresponds to the Low-side UVLO Protection. During the UVLO state the fault output is continuously driven (low).

VDD Voltage (typ. Value)	Operation behavior
< 12.5V	As the voltage is lower than the UVLO threshold the control circuit is not fully turned on. A perfect functionality cannot be guaranteed.
12.5 V – 13.5 V	IGBTs can work, however conduction and switching losses increase due to low voltage gate signal.
13.5 V – 16.5 V	Recommended conditions
16.5 V – 20.0 V	IGBTs can work. Switching speed is faster and saturation current higher, increasing short-circuit broken risk.
> 20.0 V	Control circuit is destroyed. Absolute max. rating is 20 V.

Table 3. Module operation according to control supply voltage

STK534U3xx series Application Note

The sequence of events in case of a low side UVLO event (IGBTs turned off and active fault output) is shown in Figure 12. Figure 13 shows the same for a high side UVLO (IGBTs turned off and no fault output).

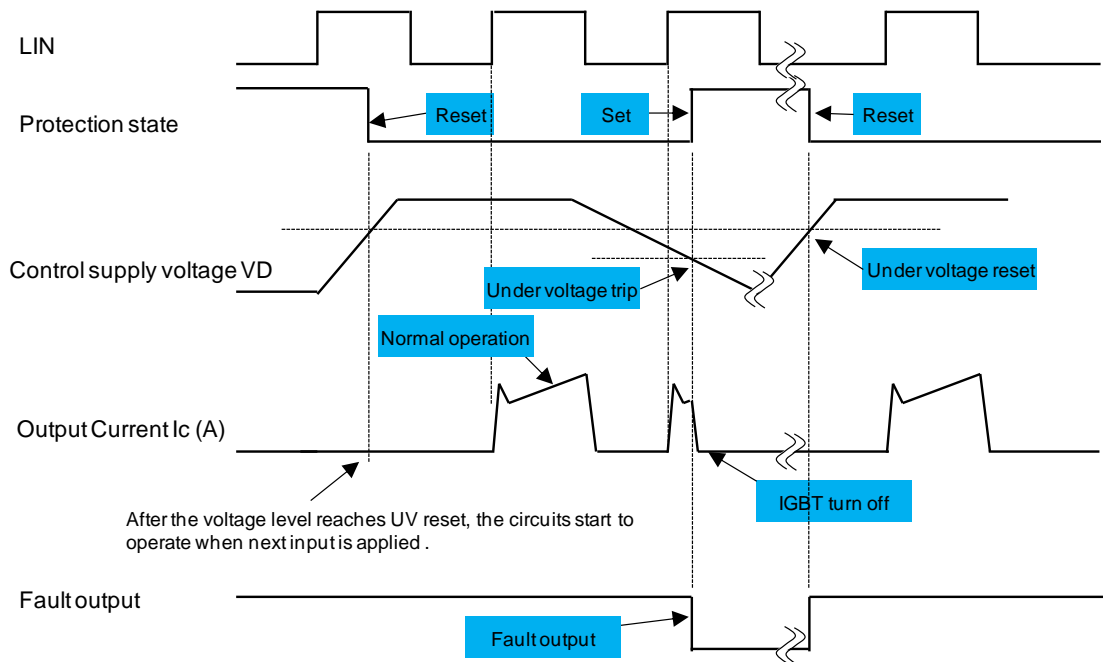


Figure 12. Low side UVLO timing chart

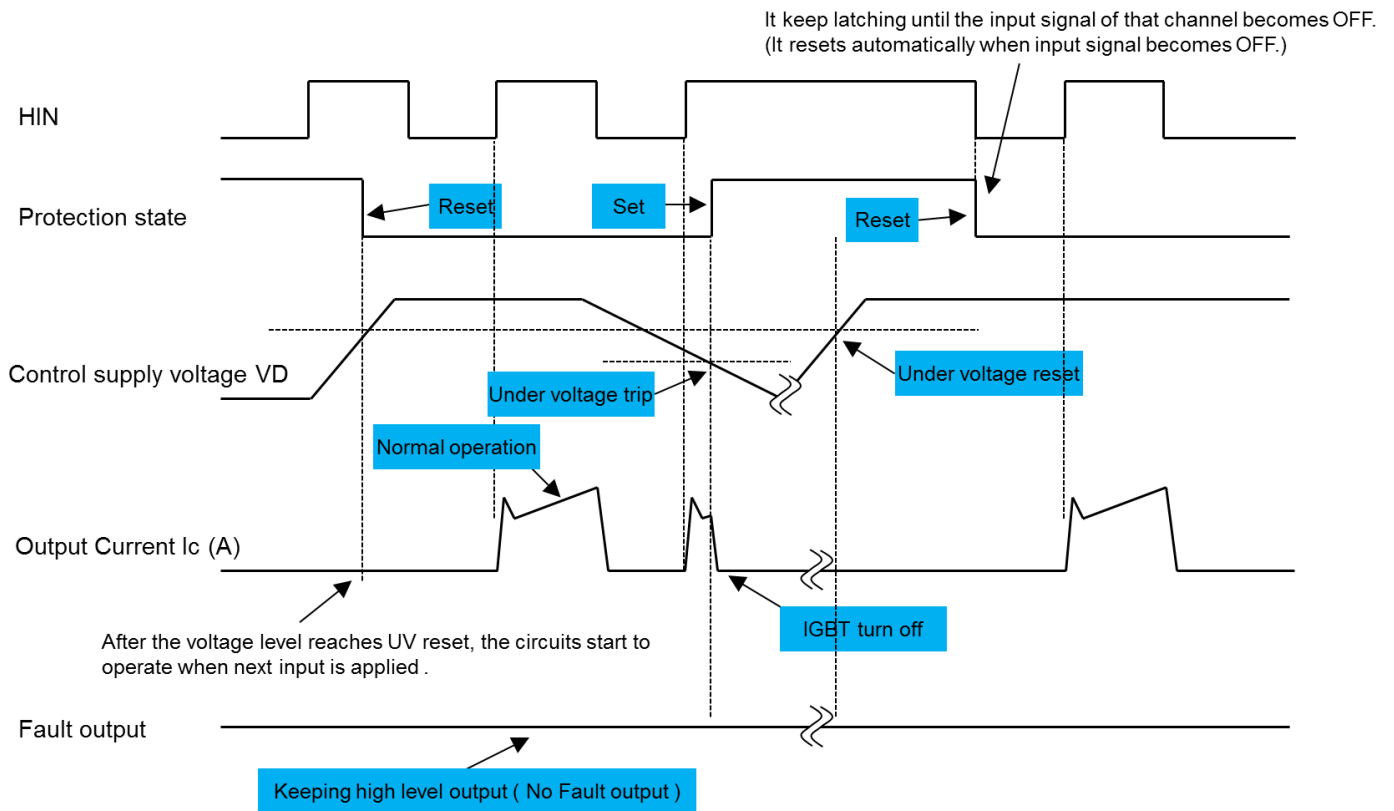


Figure 13. High side UVLO timing chart

4.3. Cross conduction prevention

The STK534U3xx series module implement a cross conduction prevention logic at the pre-driver to avoid simultaneous drive of the low- and high-side IGBTs as shown in Figure 14.

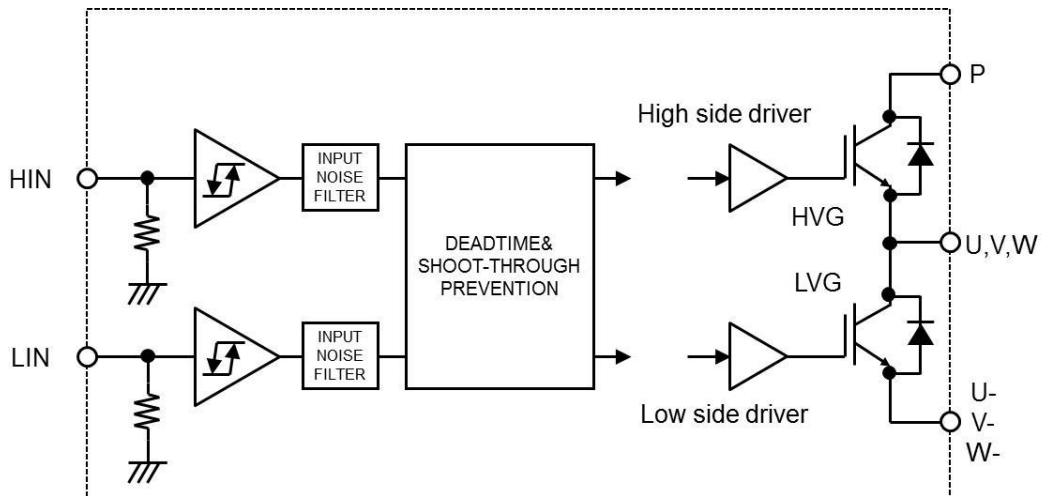


Figure 14. Cross Input Conduction Prevention

In case of both high and low side drive inputs are active (high) the logic prevents both gates from being driven – a corresponding timing diagram can be found in Figure 15 below.

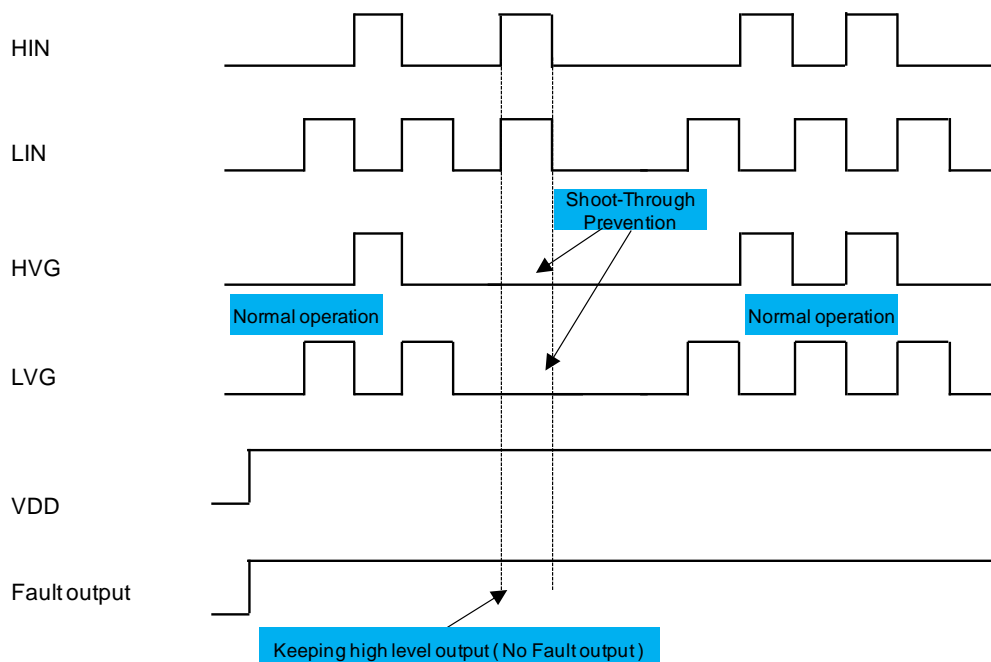


Figure 15. cross conduction prevention timing diagram

Even so cross conduction on the IGBTs due to incorrect external driving signals is prevented by the circuitry the driving signals (HIN and LIN) need to include a “dead time”. This period where both inputs are inactive between either one becoming active is required due to the internal delays within the IGBTs. Figure 16 shows the delay from the HIN-input via the internal HVG to high side IGBT, the similar path for the low side and the resulting minimum dead time which is equal to the potential shoot through period:

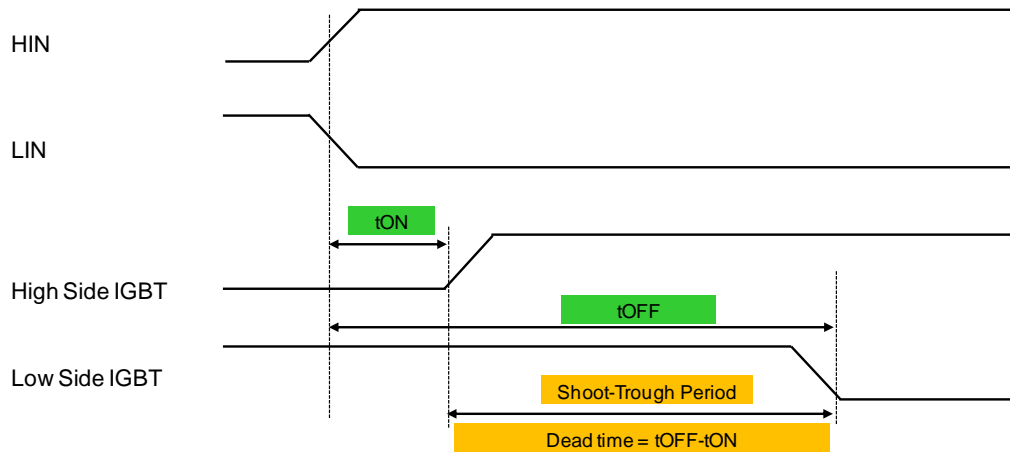


Figure 16. Shoot Trough Period

5. PCB design and mounting guidelines

This chapter provides guidelines for an optimized design and PCB layout as well as module mounting recommendations to appropriately handle and assemble the IPM.

5.1. Application (schematic) design

The following figures 17 gives an overview of the external circuitry's functionality when designing with the STK534U3xx series module.

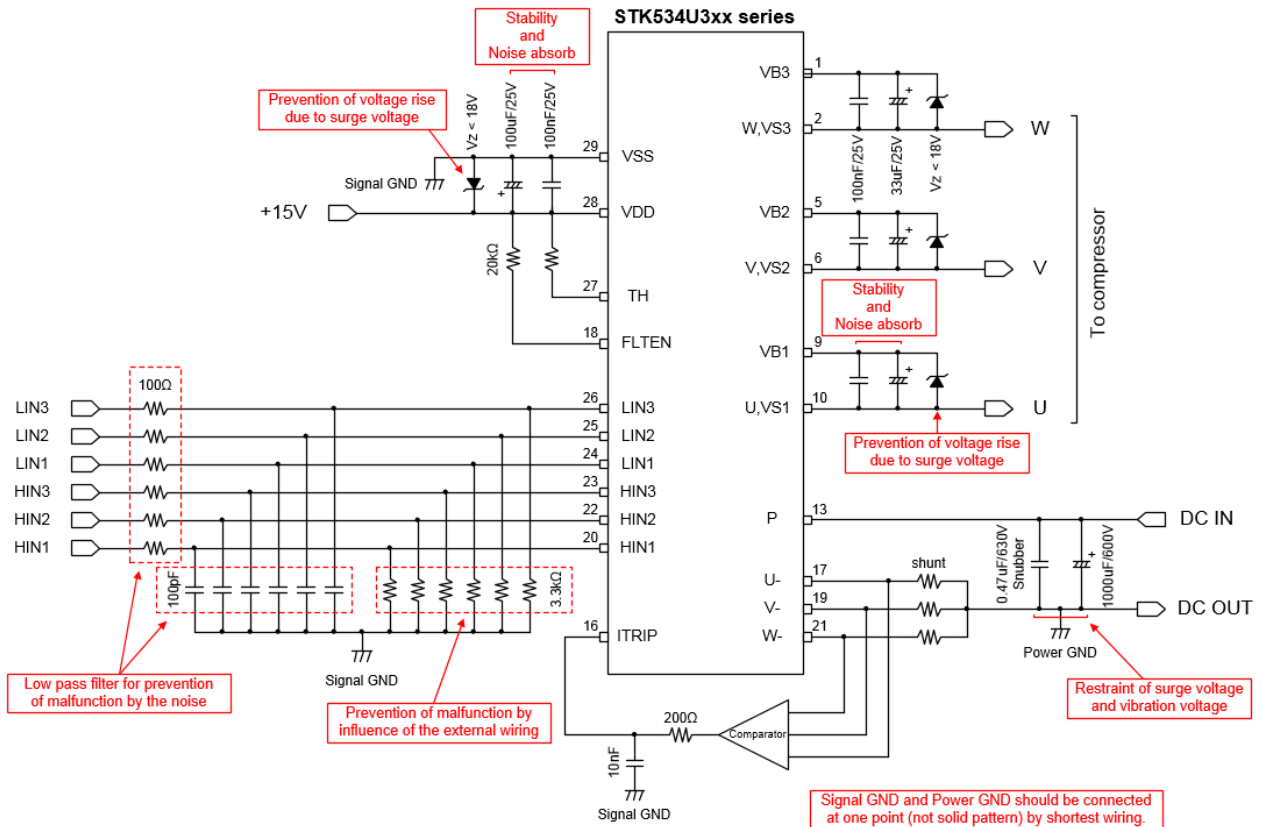


Figure 17. STK534U3xx series application circuit

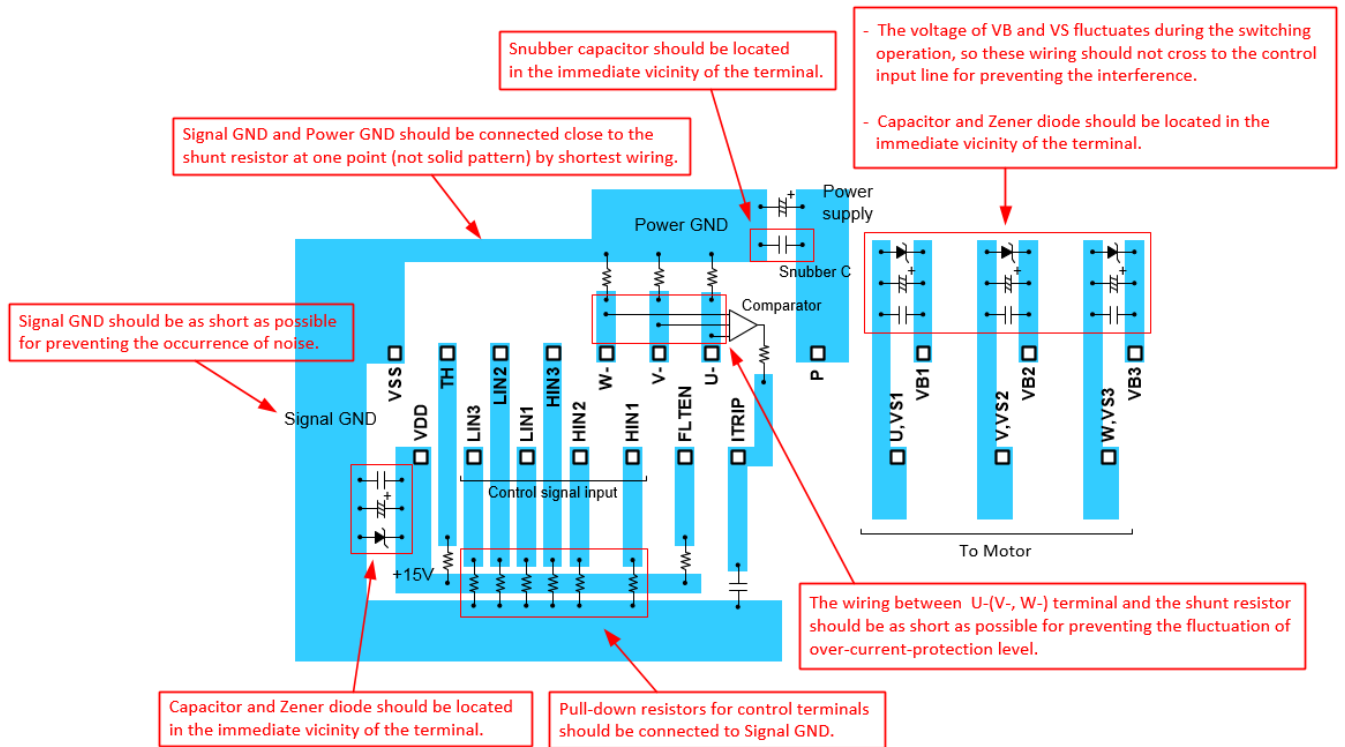


Figure 18. PCB design reference

5.2. Pin by pin design and usage notes

This section provides pin by pin PCB layout recommendations and usage notes. For a complete list of module pins refer to the datasheet or Chapter 6.

P, U-, V-, W-

These pins are connected with the main DC power supply. The applied voltage is up to the Vcc level. Overvoltage on these pins could be generated by voltage spikes during switching at the floating inductance of the wiring. To avoid this behavior the wire traces need to be as short as possible to reduce the floating inductance. In addition a snubber capacitor needs to be placed as close as possible to these pins to stabilize the voltage and absorb voltage surges.

U, V, W

These terminals are the output pins for connecting the 3-phase motor. They share the same GND potential with each of the high side control power supplies. Therefore they are also used to connect the GND of the bootstrap capacitors. These bootstrap capacitors should be placed as close to the module as possible.

VDD, VSS

These pins connect with the circuitry of the internal protection and pre-drivers for the low-side power elements and also with the control power supply of the logic circuitry. Voltage to input these terminals is monitored by the under voltage protection circuit. The VSS terminal is the reference voltage for the control inputs signals.

VB1, VB2, VB3

The VBx pins are internally connected to the positive supply of the high-side drivers. The supply needs to be floating and electrically isolated. The boot-strap circuit shown in Figure 19 forms this power supply individually for every phase. Due to integrated boot resistor and diode (RB & DB) only an external boot capacitor (CB) is required.

CB is charged when the following two conditions are met.

- ① Low-side signal is input
- ② Motor terminal voltage is low level

The capacitor is discharged while the high-side driver is activated.

Thus CB needs to be selected taking the maximum on time of the high side and the switching frequency into account.

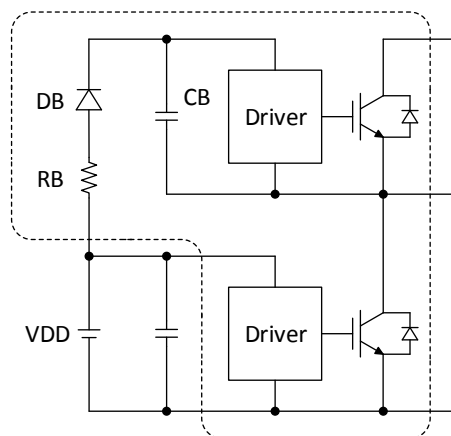


Figure 19. Boot Strap Circuit

The voltages on the high side drivers are individually monitored by the under voltage protection circuit. In case an UVP event is detected on a phase its operation is stopped.

Typically a CB value of less or equal 47uF ($\pm 20\%$) is used. In case the CB value needs to be higher an external resistor (of apx. 20 Ω or less) should be used in series with the capacitor to avoid high currents which can cause malfunction of the IPM.

HIN1, LIN1, HIN2, LIN2, HIN3, LIN3

These pins are the control inputs for the power stages. The inputs on HIN1/HIN2/HIN3 control the high-side transistors of U/V/W, and the inputs on LIN1/LIN2/LIN3 control the low-side transistors of U/V/W respectively. The input are active high and the input thresholds V_{IH} and V_{IL} are 5V compatible to allow direct control with a microcontroller system

Simultaneous activation of both low and high side is prevented internally to avoid shoot through at the power stage. However, due to IGBT switching delays the control signals must include a dead-time.

The equivalent input stage circuit is shown in Figure 20.

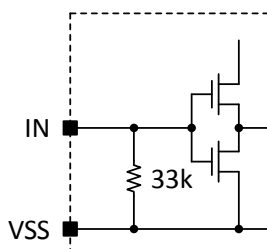


Figure 20. Internal Input Circuit

STK534U3xx series Application Note

For fail safe operation the control inputs are internally tied to VSS via a 33k Ω (typ) resistor. To avoid switching captured by external wiring to influence the module behavior an additional external low-ohmic pull-down resistor with a value of 2.2k Ω -3.3k Ω should be used.

The output might not respond when the width of the input pulse is less than 1 μ s (both ON and OFF).

FLTEN

The FLTEN pin is an active low input and open-drain output. It is used to indicate an internal fault condition of the module and also can be used to disable the module operation. The I/O structure is shown in Figure 21.

The internal sink current I_{oSD} during an active fault is nominal 2mA @ 0.1V. Depending on the interface supply voltage the external pull-up resistor (R_P) needs to be selected to set the low voltage below the VIL trip level.

For the commonly used supplies V_P :

$V_P = 15V \rightarrow R_P \geq 20k\Omega$

$V_P = 5V \rightarrow R_P \geq 6.8k\Omega$

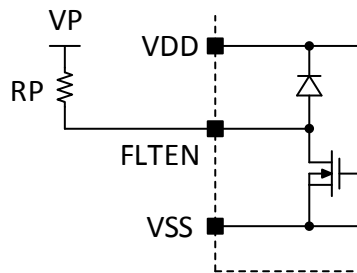


Figure 21. Fault Connection

For a detailed description of the fault operation refer to Chapter 4.

Note: The Fault signal does automatically re-started after the causing protection event end AND after the fault timeout of 2ms. Therefore the input needs to be driven low externally activated as soon as a fault is detected.

TH

An internal thermistor to sense the substrate temperature is connected between VSS and the TH pins. In conjunction with an external pull-up resistor R_{th} a module temperature monitor can be build.

Note: with this mimic only the substrate temperature can be monitored.

5.3. Heat sink mounting and torque

If a heat sink is used, insufficiently secure or inappropriate mounting can lead to a failure of the heat sink to dissipate heat adequately. This can lead to an inability of the device to provide its inherent performance, a serious reduction in reliability, or even destruction, burst and burn of the device due to overheating.

The following general points should be observed when mounting IPM on a heat sink:

1. Verify the following points related to the heat sink:
 - There must be no burrs on aluminum or copper heat sinks.
 - Screw holes must be countersunk.
 - There must be no unevenness in the heat sink surface that contacts IPM.
 - There must be no contamination on the heat sink surface that contacts IPM.
2. Highly thermal conductive silicone grease needs to be applied to the whole back (aluminum substrate side) uniformly, and mount IPM on a heat sink. Upon re-mounting apply silicone grease(100um to 200um) again uniformly.
3. For an intimate contact between the IPM and the heat sink, the mounting screws should be tightened gradually and sequentially while a left/right balance in pressure is maintained. Either a bind head screw or a truss head screw is recommended. Please do not use tapping screw. We recommend using a flat washer in order to prevent slack. The standard heat sink mounting condition of STK534U3xx series is as follows.

Item	Recommended Condition
Pitch	40.6 ± 0.1mm (Please refer to Package Outline Diagram)
Screw	diameter : M3 Bind machine screw, Truss machine screw, Pan machine screw
Washer	Plane washer The size is D:7mm, d:3.2mm and t:0.5mm (Fig.2) JIS B 1256
Heat sink	Material : copper or Aluminum Warpage (the surface that contacts IPM) : -50 to 100 μm Screw holes must be countersunk. No contamination on the heat sink surface that contacts IPM.
Torque	Final tightening : 0.6 to 0.9Nm Temporary tightening : 20 to 30 % of final tightening
Grease	Silicon grease Thickness : 100 to 200 μm Uniformly apply silicon grease to whole back. (Fig.3)

Table 4. heat sink mounting

Fig 1 : mount IPM on a Heat Sink

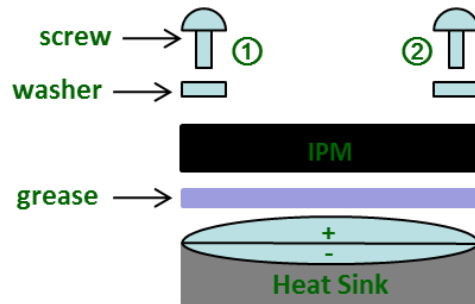


Fig 2: size of washer


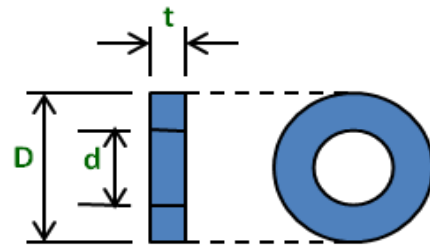


Fig 3: About uniformly application

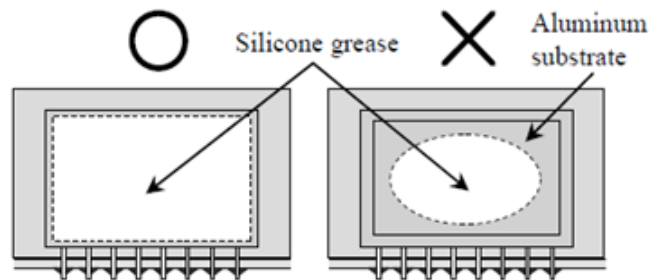

Steps to mount an IPM on a heat sink

1st: Temporarily tighten maintaining a left/right balance.

2nd : Finally tighten maintaining a left/right balance.

5.4. Mounting and PCB considerations

In designs in which the printed circuit board and the heat sink are mounted to the chassis independently, use a mechanical design which avoids a gap between IPM and the heat sink, or which avoids stress to the lead frame of IPM by an assembly that a moving IPM is forcibly fixed to the heat sink with a screw.


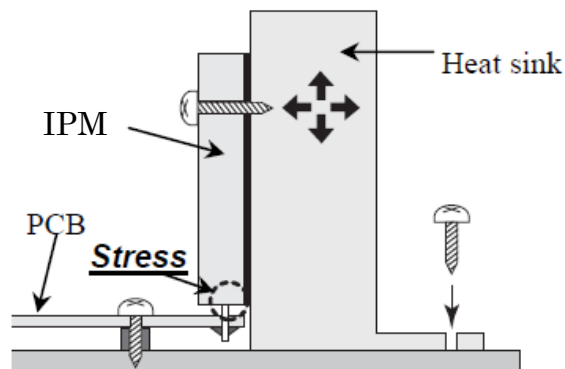


Figure 22. Fix to Heat Sink


Maintain a separation distance of at least 1.5 mm between the IPM case and the printed circuit board. In particular, avoid mounting techniques in which the IPM substrate or case directly contacts the printed circuit board.

STK534U3xx series Application Note

Do not mount IPM with a tilted orientation. This can result in stress being applied to the lead frame and IPM substrate could short out tracks on the printed circuit board. Always mount the IPM vertically. If stress is given by compulsory correction of a lead frame after the mounting, a lead frame may drop out. Be careful of this point.

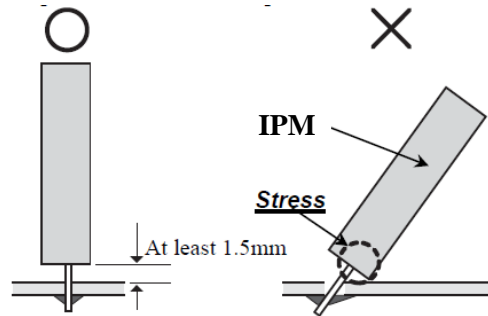

When designing the PCB layout take care that the bent part portion of the lead frame pins does not short-circuit to VIA holes or tracks on the PCB.

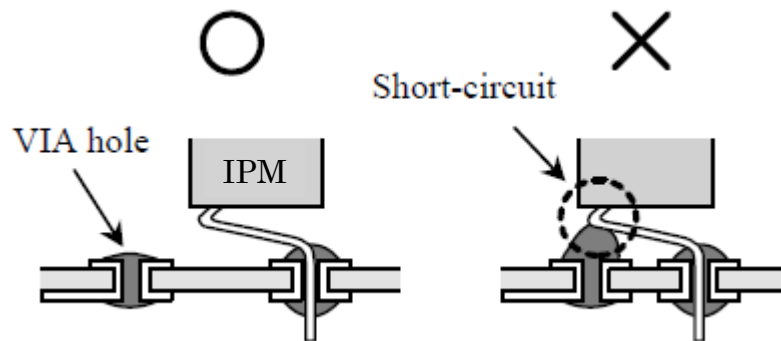

Since the use of sockets to mount IPM can result in poor contact with IPM leads, we strongly recommend making direct connections to PCB.

IPMs are flame retardant. However, under certain conditions, it may burn, and poisonous gas may be generated or it may explode. Therefore, the mounting structure of the IPM should also be flame retardant.

Mounting on a Printed Circuit Board

1. Align the lead frame with the holes in the printed circuit board and do not use excessive force when inserting the pins into the printed circuit board. To avoid bending the lead frames, do not try to force pins into the printed circuit board unreasonably.
2. Do not insert IPM into printed circuit board with an incorrect orientation, i.e. be sure to prevent reverse insertion. IPM may be destroyed, exploded, burned or suffer a reduction in their operating lifetime by this mistake.
3. Do not bend the lead frame.

5.5. Cleaning

IPM has a structure that is unable to withstand cleaning. As a basic policy, do not clean independent IPM or printed circuit boards on which an IPM is mounted.


6. Package Outline

STK534U3xx series is SIP05 package. (Single-inline-package)


Every second pin is bent forward to form two rows on the PCB see Figure 23.

6.1. Package outline and dimension

STK534U3xxC-E (Vertical type)

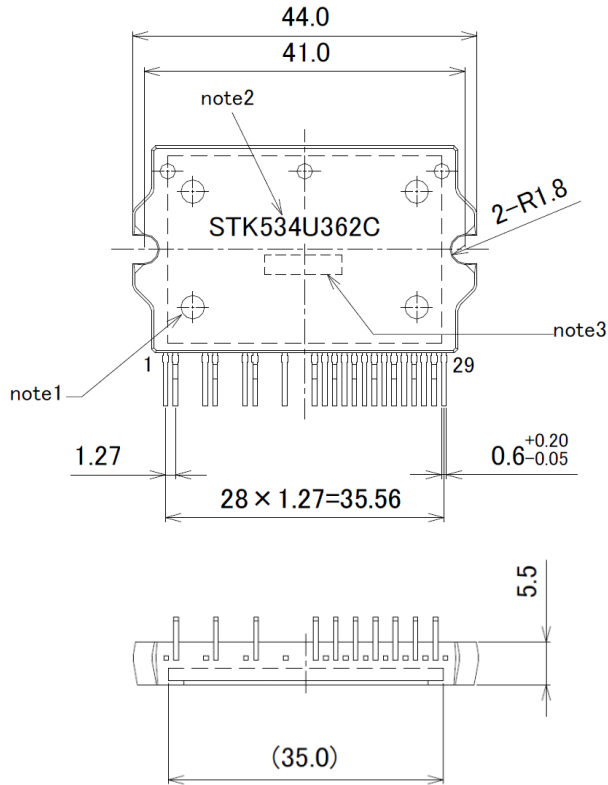

missing pin: 3,4,7,8,11,12,14,15

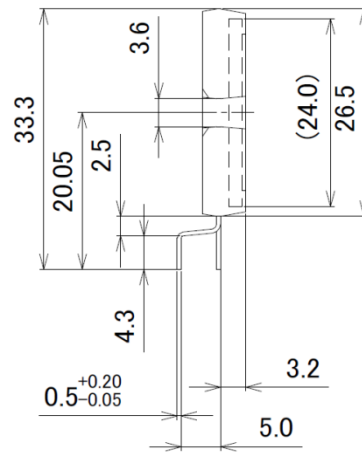

note1: Mirror surface for No.1 pin identification

note2: Model number

note3: Lot code

* The form of a character in this drawing differs from that of IPM.

Figure 23. Package Outline

6.2. Pin Out Description

Pin	Name	Description
1	VB3	High Side Floating Supply Voltage 3
2	W,VS3	Output 3 - High Side Floating Supply Offset Voltage
3	NA	none
4	NA	none
5	VB2	High Side Floating Supply voltage 2
6	V,VS2	Output 2 - High Side Floating Supply Offset Voltage
7	NA	none
8	NA	none
9	VB1	High Side Floating Supply voltage 1
10	U,VS1	Output 1 - High Side Floating Supply Offset Voltage
11	NA	none
12	NA	none
13	P	Positive Bus Input Voltage
14	NA	none
15	NA	none
16	ITRIP	Shut-down Pin
17	U-	Low Side Emitter Connection - Phase 1
18	FLTEN	Enable input / Fault output
19	V-	Low Side Emitter Connection - Phase 2
20	HIN1	Logic Input High Side Gate Driver - Phase 1
21	W-	Low Side Emitter Connection - Phase 3
22	HIN2	Logic Input High Side Gate Driver - Phase 2
23	HIN3	Logic Input High Side Gate Driver - Phase 3
24	LIN1	Logic Input Low Side Gate Driver - Phase 1
25	LIN2	Logic Input Low Side Gate Driver - Phase 2
26	LIN3	Logic Input Low Side Gate Driver - Phase 3
27	TH	Temperature Monitor
28	VDD	+15V Control Power Supply
29	VSS	Negative Control Power Supply

7. Demo Board

The demo board consists of the minimum required components such as snubber capacitor and bootstrap circuit elements of STK534U3xx series.



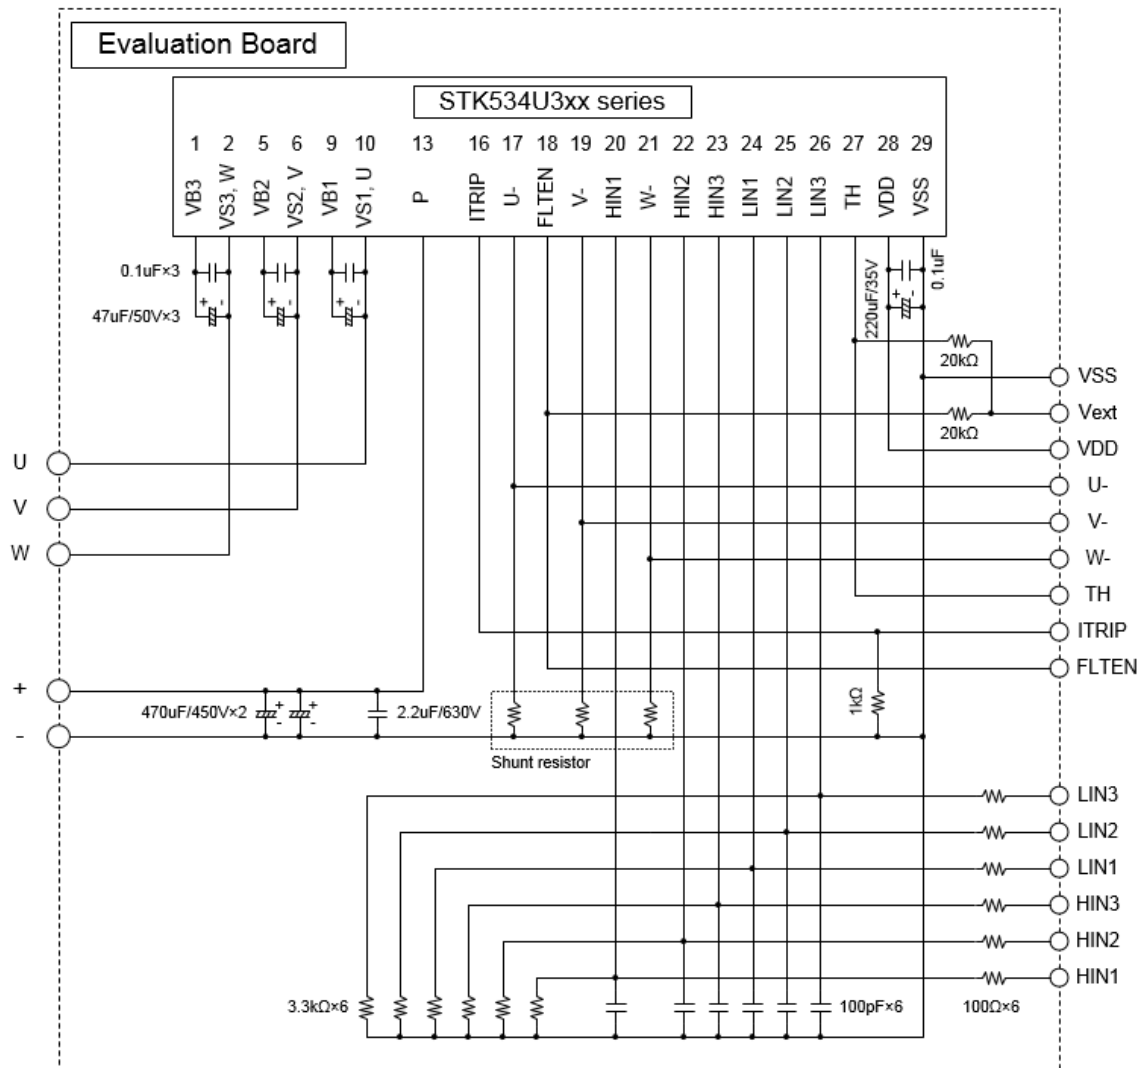


Figure 24. Evaluation board schematic

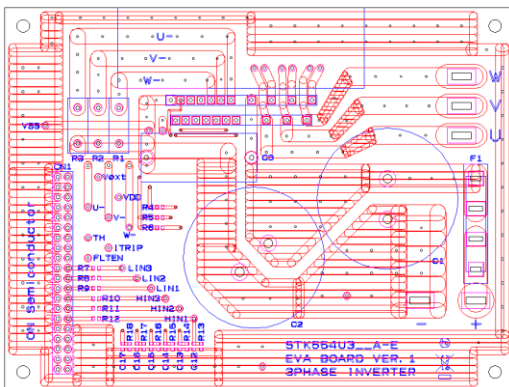

Surface

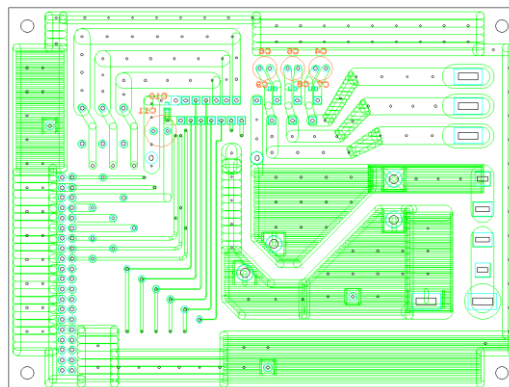


Back side

Length : 96mm
Side : 128mm
Thickness : 1.6mm

Rigid double-sided substrate
Material : FR-4
Copper foil thickness : 70um
Both sides resist coating

Figure 25. Evaluation board PCB layout (TOP view)

STK534U3xx series Application Note

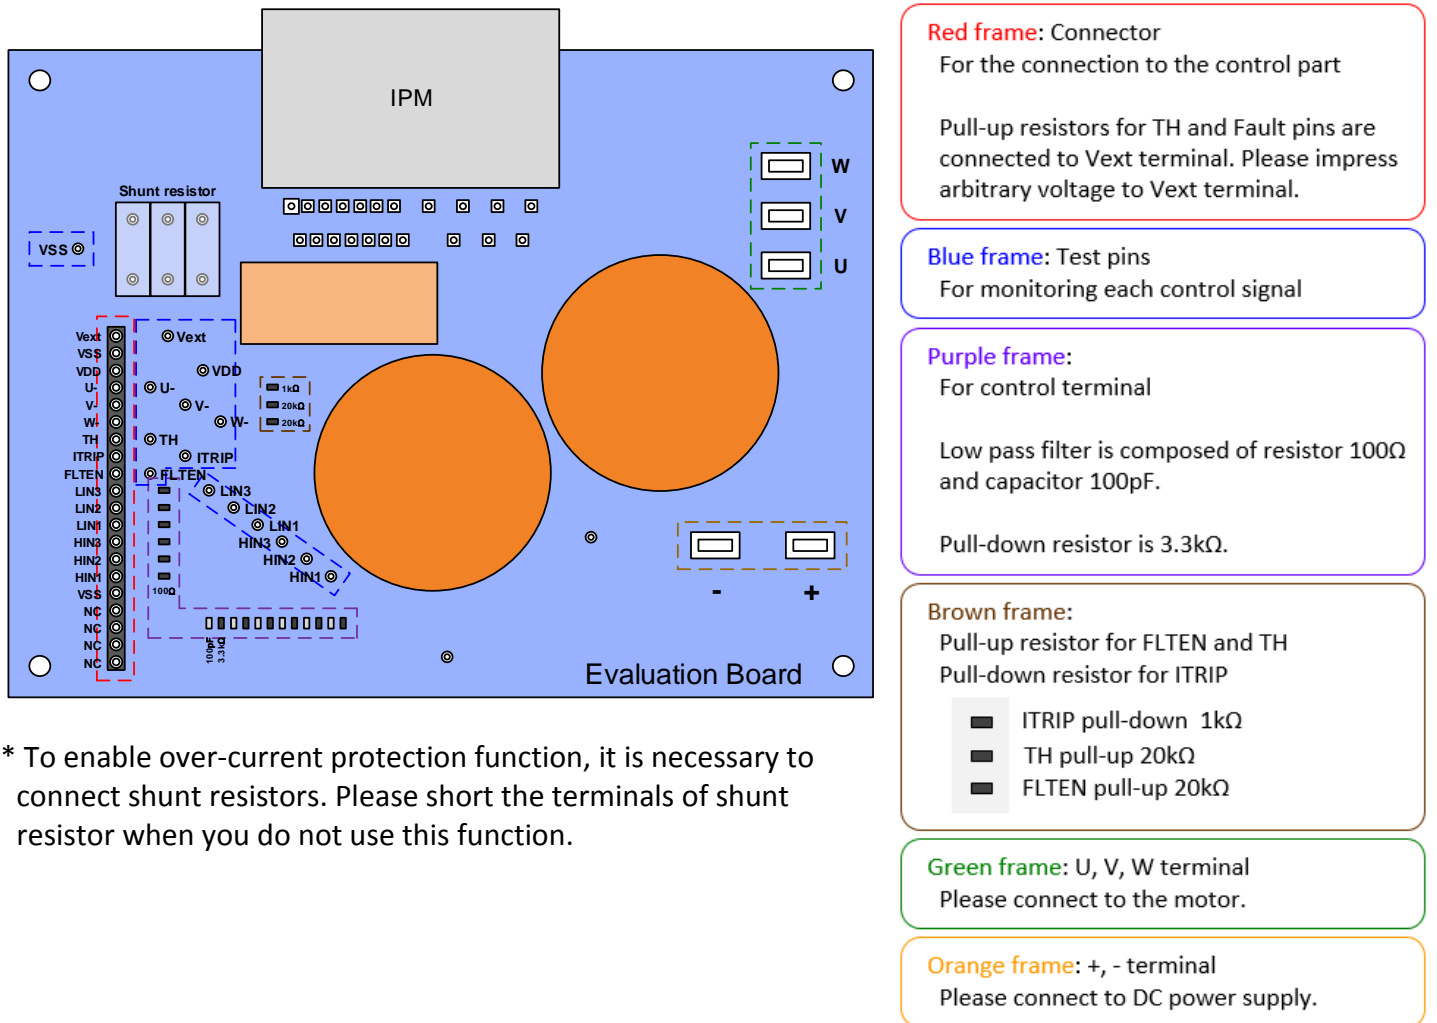

* To enable over-current protection function, it is necessary to connect shunt resistors. Please short the terminals of shunt resistor when you do not use this function.

Figure 26. Description of each pin

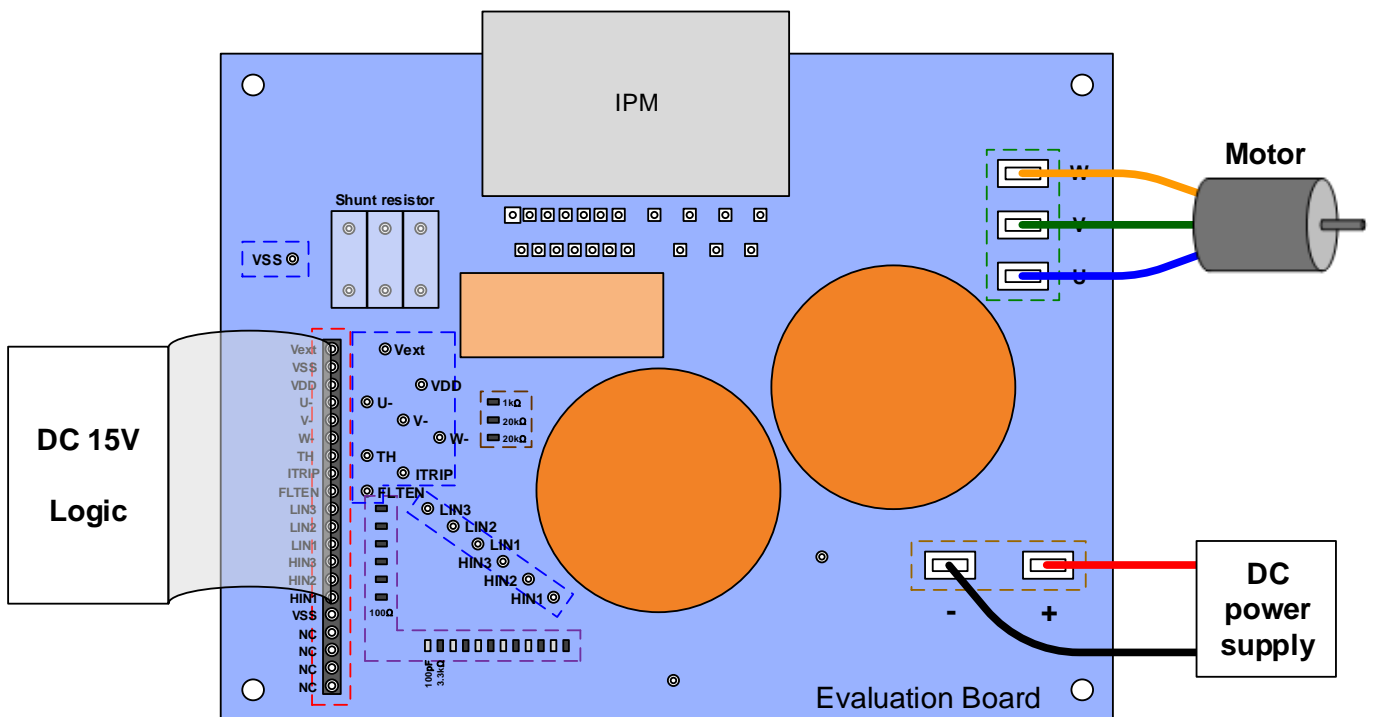


Figure 27. Evaluation board instructions

Operation procedure

- Step1:** Please connect IPM, each power supply, logic parts and the motor to the evaluation board, and confirm that each power supply is OFF at this time.
- Step2:** Please impress the power supply of DC15V.
- Step3:** Please perform a voltage setup according to specifications, and impress the power supply between the "+" and the "-" terminal.
- Step4:** By inputting signal to the logic part, IPM control is started.
(Therefore, please set electric charge to the boot-strap capacitor of upper side to turn on lower side IGBT before running.)

* When turning off the power supply part and the logic part, please carry out in the reverse order to above steps.

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.