

# Enhancement Mode GaN Power Switch with Integrated Gate Clamp and Protection

650 V, 27 mΩ, TOLT 10x15

## Preliminary Document **NCP58934ABT**



The NCP58934ABT integrates a 650 V enhancement-mode GaN power transistor with gate-drive and protection functions in a single package. An internal gate clamp, supported by LDO-based circuitry, regulates the gate drive voltage over a 10 V to 24 V input range to protect the GaN transistor from excessive gate stress while maintaining excellent switching performance. External resistors can be used to adjust turn-on and turn-off slew rates, allowing the designer to balance EMI performance and conversion efficiency. Integrated protection features include a Miller clamp to help prevent false turn-on during high dV/dt operation. The device is intended for compact, high-frequency, and high-power conversion applications.

### Features

- 650 V 27 mΩ GaN HEMT
- Integrated Gate Clamp (External Driver Required)
- 800 V Transient Drain Voltage Capability
- 10 V to 24 V Gate Input Operating Range
- Adjustable Turn-on and Turn-off Slew Rates Using External Resistors
- Integrated Miller Clamp for dV/dT Immunity up to 100 V/ns
- High Frequency Switching Capability up to 2 MHz
- Supports Parallel Operation
- Zero Reverse Recovery Charge

### Typical Applications

- Industrial and Computing PSU
- Power Conversion
- High Power Density Power Supplies
- All Double-ended Topologies: Half-bridge, Full-bridge, LLC
- High-voltage Synchronous Buck Converter
- High-voltage Synchronous Boost Converter
- Two-switch Forward Converter
- Synchronous PFC Stage
- Totem Pole PFC

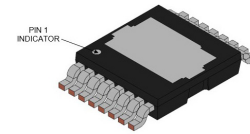


TOLT (10 x 15 mm)  
CASE TBD

### MARKING DIAGRAM

TBD

### PIN ASSIGNMENT

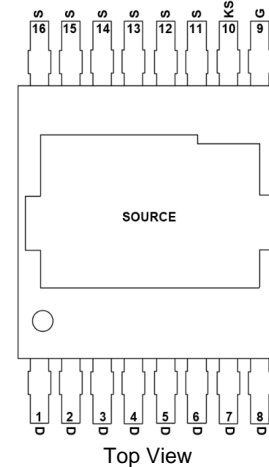

### ORDERING INFORMATION

See detailed ordering and shipping information on page 8 of this data sheet.

This Preliminary document is for informational purposes only. **onsemi** may update or withdraw it without notice. Content and referenced products are under development and subject to change.

# NCP58934ABT

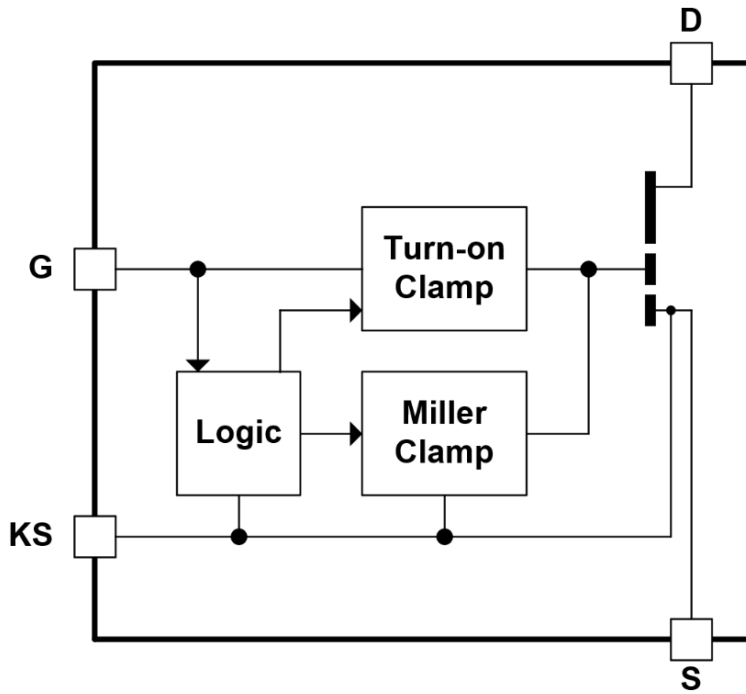


Figure 1. Block Diagram

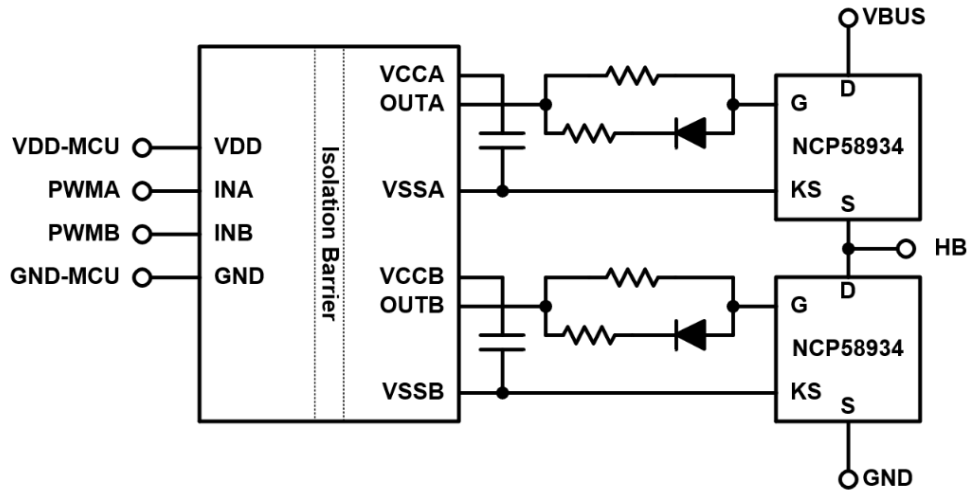


Figure 2. Half-bridge Application Schematic with Signal Isolator

# NCP58934ABT

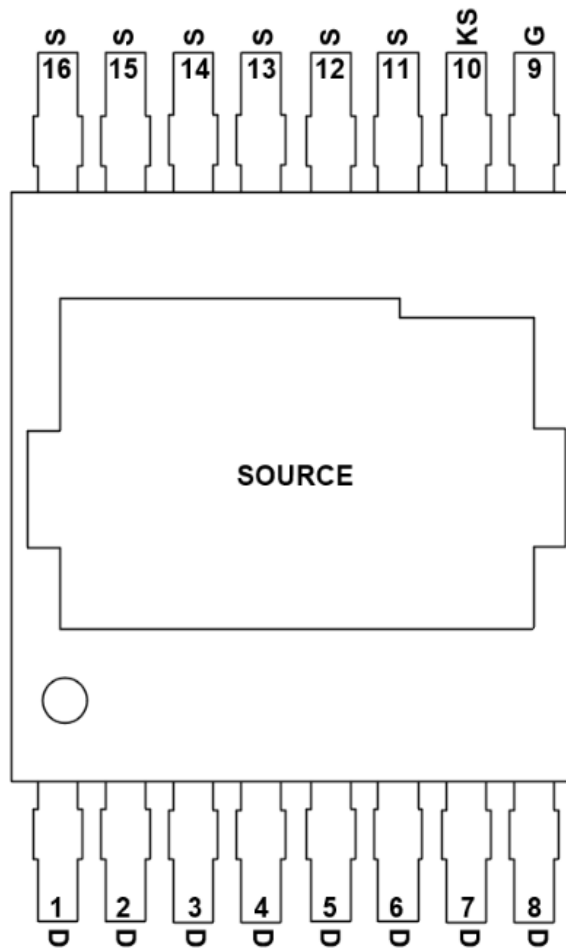


Figure 3. Pin Connections (Top View)

## PIN DESCRIPTION

Pin No.	Pin Name	Function	Pin Description
1–8	DRAIN	GaN power switch drain	Power path connection for the GaN HEMT DRAIN.
9	G(GATE)	Gate driver input	Output of external gate driver should be connected to this pin. Internal clamping circuits will limit VGS of the GaN HEMT.
10	KS	GaN power switch Kelvin source	Gate driver return path. This pin is internally connected to the source pad of the GaN HEMT.
11–16, Thermal Pad (Top)	SOURCE	GaN power switch source	Power path connection for the GaN HEMT SOURCE.

# NCP58934ABT

## MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Continuous Gate Input Voltage, Referenced to SOURCE (Note 1)	$V_{GS}$	-0.3 to 26	V
Transient Gate Input Voltage, Referenced to SOURCE, $t_{PULSE} < 100$ ns	$V_{GS(PULSE)}$	-5 to 26	V
Continuous Drain-to-Source Voltage	$V_{DSS}$	650	V
Transient Drain-to-Source Voltage, Non-repetitive, $t_{PULSE} < 200$ $\mu$ s	$V_{DS(TRAN)}$	800	V
Allowable Drain-to-Source Voltage Slew Rate, Device is OFF	$dV_{DS}/dt$	100	V/ns
Continuous Drain Current, $T_C = 25$ °C	$I_{DS}$	63	A
Continuous Drain Current, $T_C = 100$ °C	$I_{DS}$	40	A
Pulsed Drain Current, $T_J = 25$ °C, Pulse-width $< 10$ $\mu$ s	$I_{DS(PULSE)}$	127	A
Pulsed Drain Current, $T_J = 125$ °C, Pulse-width $< 10$ $\mu$ s	$I_{DS(PULSE)}$	64	A
Maximum Power Dissipation, $T_{CASE} = 25$ °C	$P_{MAX}$	417	W
Maximum Junction Temperature	$T_{J(MAX)}$	150	°C
Storage Temperature Range	$T_{STG}$	-55 to 150	°C
ESD Capability, Human Body Model (Note 2)	$ESD_{HBM}$	2	kV
ESD Capability, Charged Device Model (Note 2)	$ESD_{CDM}$	1	kV
Lead Temperature Soldering, Reflow (SMD Styles Only), Pb-Free Versions (Note 3)	$T_{SLD}$	260	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- Referring to ELECTRICAL CHARACTERISTICS, RECOMMENDED OPERATING RANGES and/or APPLICATION INFORMATION for Safe Operating parameters.
- This device series incorporates ESD protection and is tested by the following methods: ESD Human Body Model tested per AEC-Q100-002 (EIA/JESD22-A114), ESD Machine Model tested per AEC-Q100-003 (EIA/JESD22-A115), Latch-up Current Maximum Rating:  $\leq 150$  mA per JEDEC standard: JESD78.
- For information, please refer to our Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

## THERMAL CHARACTERISTICS

Rating	Symbol	Typical Value	Unit
Thermal Characteristics, TOLL Thermal Resistance, Junction-to-Case (Exposed Source Pad) Thermal Resistance, Junction-to-Air (Note 4)	$R_{\theta JC(bot)}$ $R_{\theta JA}$	0.3 46	°C/W

- Values based on copper area of 645 mm<sup>2</sup> (or 1 in<sup>2</sup>) of 2 oz copper thickness, two layers FR4 PCB substrate.

## RECOMMENDED OPERATING CONDITIONS

Rating	Symbol	Min	Max	Unit
Gate Input Voltage	$V_{GS}$	10	24	V
Turn-on Gate Pin Series Resistor	$R_{G(ON)}$	1	50	$\Omega$
Turn-off Gate Pin Series Resistor	$R_{G(OFF)}$	1	10	$\Omega$

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

# NCP58934ABT

**ELECTRICAL CHARACTERISTICS** ( $V_G = 15\text{ V}$ ,  $R_G = 10\ \Omega$ , for typical values  $T_A = 25\text{ }^\circ\text{C}$ ,  $V_{BUS} = 400\text{ V}$ , unless otherwise noted)

Parameter	Test Condition	Symbol	Min	Typ	Max	Unit
<b>GaN TRANSISTOR SECTION</b>						
SOURCE-DRAIN Third-Quadrant Voltage	$I_{SD} = 18\text{ A}$ , $V_{GS} = 0\text{ V}$	$V_{SD}$		2.3		V
DRAIN Leakage Current	$V_{DS} = 650\text{ V}$ , $T_J = 25\text{ }^\circ\text{C}$ , $V_{GS} = 0\text{ V}$	$I_{DSS}$		8	100	$\mu\text{A}$
	$V_{DS} = 650\text{ V}$ , $T_J = 150\text{ }^\circ\text{C}$ , $V_{GS} = 0\text{ V}$	$I_{DSS}$		TBD		$\mu\text{A}$
DRAIN-SOURCE On-state Resistance	$I_{DS} = 18\text{ A}$ , $T_J = 25\text{ }^\circ\text{C}$	$R_{DS(ON)}$		27	35	$\text{m}\Omega$
	$I_{DS} = 18\text{ A}$ , $T_J = 150\text{ }^\circ\text{C}$	$R_{DS(ON)}$		55		$\text{m}\Omega$
Output Capacitance	$V_{GS} = 0\text{ V}$ , $V_{DS} = 400\text{ V}$	$C_{OSS}$		176		pF
Output Capacitance, Energy Related (Note 5) (Note 6)	$V_{GS} = 0\text{ V}$ , $V_{DS} = 0\text{ to }400\text{ V}$	$C_{OSS(ER)}$		253		pF
Output Capacitance, Time Related (Note 6) (Note 7)	$V_{GS} = 0\text{ V}$ , $V_{DS} = 0\text{ to }400\text{ V}$	$C_{OSS(TR)}$		331		pF
Output Charge (Note 6)	$V_{GS} = 0\text{ V}$ , $V_{DS} = 0\text{ to }400\text{ V}$	$Q_{OSS}$		132		nC
Energy Stored in Output Capacitance (Note 6)	$V_{GS} = 0\text{ V}$ , $V_{DS} = 0\text{ to }400\text{ V}$	$E_{OSS}$		20.2		$\mu\text{J}$
Reverse Recovery Charge (Note 6)		$Q_{RR}$		0		nC

## GATE INPUT SECTION

Gate Input ON Minimum		$V_{GS(ON)}$			9	V
Gate Input OFF Maximum		$V_{GS(OFF)}$	0.5			V
Gate Input Quiescent Current	$V_G = 15\text{ V}$ , $V_{DS} = 0\text{ V}$	$I_{GQ}$		1.9	5.2	mA

## TIMING CHARACTERISTICS SECTION

Minimum Input On Time	$R_G = 1\ \Omega$ , Minimum input on time to guarantee datasheet timing specifications	$t_{ON(MIN)}$	80			ns
Minimum Input Off Time	$R_G = 1\ \Omega$ , Minimum input off time to guarantee datasheet timing specifications	$t_{OFF(MIN)}$	40			ns
Input to Switch Turn-on Propagation Delay (Note 8)	$R_G = 1\ \Omega$	$t_{PD(ON)}$		23		ns
Input to Switch Turn-off Propagation Delay (Note 8)	$R_G = 1\ \Omega$	$t_{PD(OFF)}$		8		ns
Rise Time (Note 8)	$R_G = 10\ \Omega$ , $I_{DS} = 18\text{ A}$ , $V_{BUS} = 400\text{ V}$	$t_R$		6.6		ns
Fall Time (Note 8)	$R_G = 1\ \Omega$ , $I_{DS} = 18\text{ A}$ , $V_{BUS} = 400\text{ V}$	$t_F$		13		ns

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

5.  $C_{OSS(ER)}$  is the fixed capacitance that would give the same stored energy as  $C_{OSS}$  while  $V_{DS}$  is rising from 0 V to the stated  $V_{DS}$ .
6. The parameter is not tested in the production; value is guaranteed by the design.
7.  $C_{OSS(TR)}$  is the fixed capacitance that would give the same charging time as  $C_{OSS}$  while  $V_{DS}$  is rising from 0 V to the stated  $V_{DS}$ .
8. Refer to Timing Characterization Reference section.

DEFINITIONS

General

All measurements are performed using short pulse low duty cycle techniques to maintain junction temperature as close as possible to ambient temperature.

Switching Test Circuit

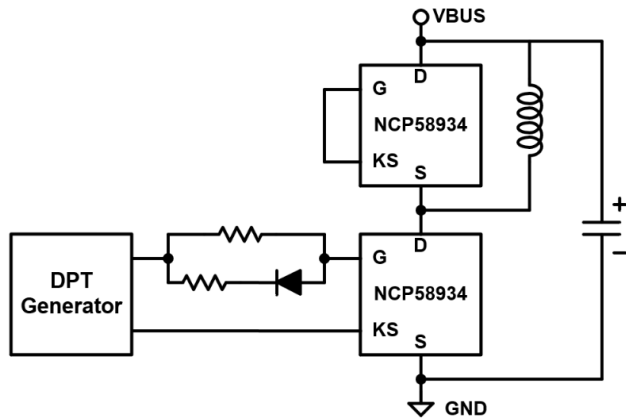


Figure 4. Half-bridge Stage Arranged as Double-pulse Tester (DPT) Circuit

A typical approach to how to determine timing parameters of switching devices is to test them in double-pulse tester or use double-pulse testing technique. The half-bridge is a basic switching structure adopted in wide range of converter topologies, that is easy to convert into double-pulse tester. Figure 4 shows a principle schematic diagram of circuit that is used to measure switching parameters. The low-side device NCP58934 is the part that actively switches. When the device is turned on, an inductor current is built to a certain level. The inductor current for this switching interval is almost the same as Drain current and its level is basically related to  $+V_{BUS}$  voltage, inductance, and turn-on pulse width. When the low-side device is turned off, inductor current cannot be interrupted, so the high-side NCP58934 naturally turns on, operating in third quadrant and its function is the same as freewheeling diode which enables inductor current re-circulation. Operation in the third quadrant should be well considered to avoid generating excessive losses and thus device overheating. Dedicated sequence of pulses creates operating conditions that are sufficient for generating switching waveforms and measuring required parameters. The specific timing measurement is shown in Figure 5.

Timing Characterization Reference

The timing of the turn-on transition is composed of two parameters: input-to-switch turn-on propagation delay and switch- $V_{DS}$ -voltage falling time. The first component is the

propagation delay of the driver from when the input goes high to when the GaN HEMT starts turning-on while its  $V_{DS}$  voltage drops to 90% of  $+V_{BUS}$ . The rise time,  $t_r$ , is the time it takes for switch- $V_{DS}$  voltage to slew between 90 percent and 10 percent of  $+V_{BUS}$  voltage. Turn-on impedance of the gate driver has significant impact on turn-on slew rate while the turn-on propagation delay influence is minor. The timing definition of the turn-off transition also has two components: input-to-switch turn-off propagation delay and fall time,  $t_f$ . Reference levels are the same, however, the difference lays in opposite order, as depicted in Figure 5.

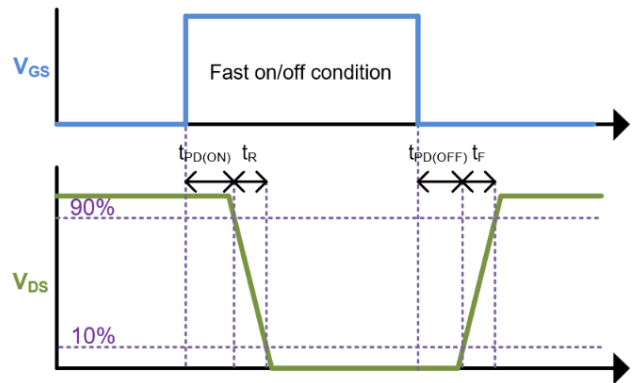


Figure 5. Measurement Reference for Determining Timing

High Speed Measurement Practice

In general, the GaN HEMTs have a significantly faster switching performance than silicon and silicon-carbide MOSFETs. It's essential to use proper measuring techniques to evade the parasitic elements introduced by test equipment, that may distort device parameters and lead to inaccurate measurement results. A long probing ground wire inserts undesired inductance into the probe measurement path, which results in overshoot and ringing linked to the rising and falling edges of the measured signals. Minimizing the length of the ground loop is important especially for signals which have very high  $dv/dt$  level. At least, it's recommended to use a so called "pigtail" that helps to reduce probe grounding inductance and thus provides more accurate measurement. Further, it's advised to use an oscilloscope and a probe with bandwidth more than 350 MHz, while edge slope time distortion of approximate 1.5 ns should be considered.

Maximum Package Power Dissipation

The power dissipation level is the maximum allowed power dissipation for package or power dissipation at which the junction temperature reaches its maximum operating value, whichever is lower.

## FUNCTIONAL DESCRIPTION

### Overview

The NCP58934 is a 650 V power IC that integrates a high-performance enhancement-mode GaN FET with advanced control and protection features in a single device. It incorporates a gate clamp that supports a wide gate-input voltage range from 10 V to 24 V. An accurate LDO-based circuit tightly regulates the gate voltage to protect the GaN FET from excessive voltage stress while maintaining switching performance. External gate resistors can be used to adjust both turn-on and turn-off slew rates, allowing optimization of EMI and efficiency. The device also includes a Miller clamp with strong gate pull-down capability to help prevent false turn-on during high dV/dt switching events. These functions are implemented without requiring a continuous external supply for the internal bias circuitry. With the GaN FET and protection features integrated in a TOLT package, the NCP58934 enables simple power-stage implementation with low external component count for high-frequency and high-power applications. It is important to remember that this device still requires an external gate driver to function correctly.

### Input Via G(GATE) Pin

The NCP58934 includes a G input pin for control of the integrated GaN FET. When the G input voltage rises above the input-high threshold of  $V_{G(ON)}$ , the device propagates the input signal to the GaN FET gate, turning the device on and establishing a low-resistance conduction path from Drain to Source with a typical on-state resistance of 27 m $\Omega$ . When the G input voltage falls below the input-low threshold of  $V_{G(OFF)}$ , the device blocks propagation of the input signal and pulls the GaN FET gate down to Source, turning the device off and interrupting the Drain-to-Source current path. Figure 5 shows the relationship between the input signal and the output response. The NCP58934 also includes a 10 ns typical turn-on deglitch filter on the G input to reject unwanted pulses.

The NCP58934 supports a wide G input voltage range from 10 V to 24 V for design flexibility. Internal circuitry is

powered directly from the G input, eliminating the need for a continuous external supply for the internal bias circuitry.

### Turn-on Slew-rate (dv/dt) Adjustment

The NCP58934 allows independent adjustment of the GaN FET turn-on and turn-off slew rates. As shown in Figure 6, this is implemented using external gate resistors and a diode connected between the driver output and the G pin. This network independently sets the current available to charge and discharge the GaN gate, enabling separate control of the turn-on and turn-off transitions.

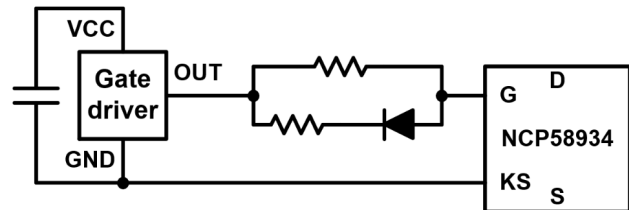


Figure 6. Passive Network for Adjustable Turn-on and Turn-off Slew Rate Control

### Drain-to-Source Voltage and its Maximum Recommended Levels

The NCP58934 is designed with sufficient margin to handle both transient and continuous voltage stresses common in half-bridge topologies such as buck, boost, LLC, and totem-pole PFC. Figure 7 illustrates recommended limits. For *non-repetitive* events – including line surges, lightning strikes, startup, short-circuit, and load transients – the device supports a transient drain-to-source voltage rating of  $V_{DS(TRAN)} = 800$  V for durations under 200  $\mu$ s, ensuring robustness without derating. For *repetitive* conditions, such as normal switching and steady-state operation after turn-off, overshoot caused by parasitic inductances must be clamped to  $V_{DS(MAX)} = 650$  V. After the overshoot dissipates, the voltage settles at  $V_{PLATEAU}$ , which is recommended not to exceed 80% of  $V_{DS(MAX)}$ , or  $\leq 520$  V, meaning the DC bus voltage ( $V_{BUS}$ ) should be limited to 520 V.

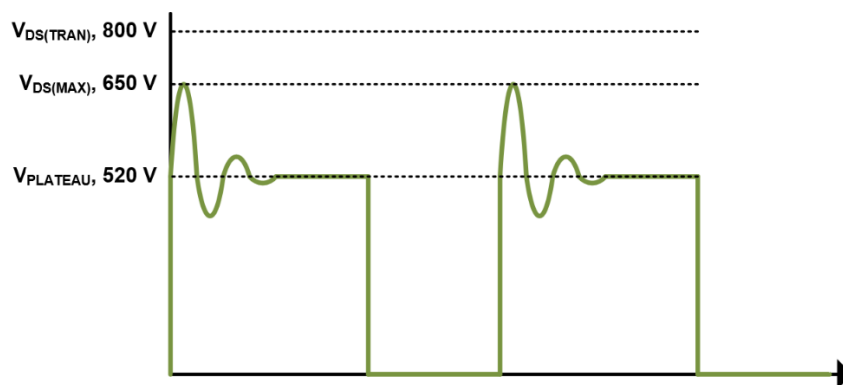


Figure 7. Drain-to-Source Voltage Definition

# NCP58934ABT

## ORDERING INFORMATION

Device Order Number	Package Type	Shipping
ENGNC58934ABTTXG	TOLT 10x15 mm	TBD





# NCP58934ABT

## REVISION HISTORY

Revision	Description of Changes	Date
P0	Initial Preliminary document release.	5/11/2026

# NCP58934ABT

## PACKAGE DIMENSIONS

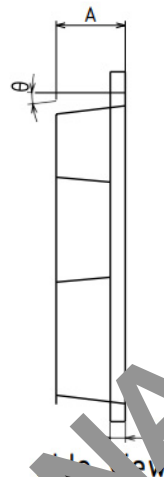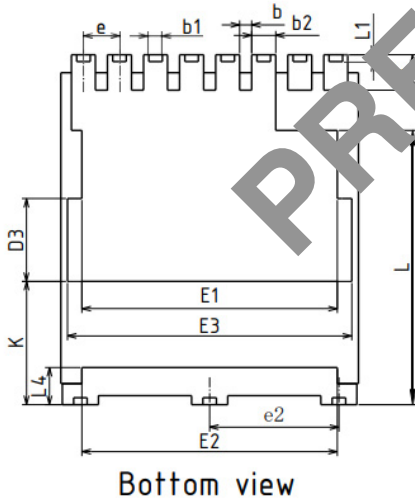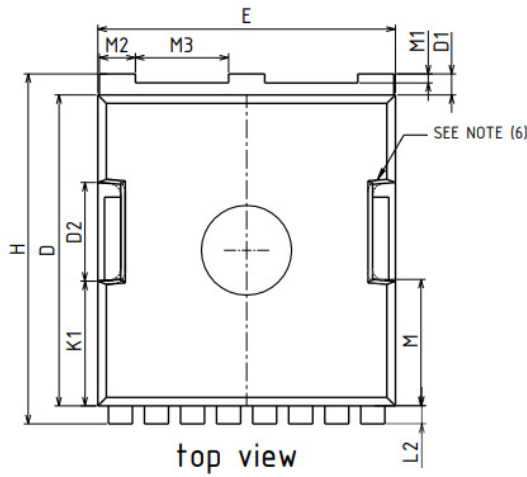

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	2.15	2.30	2.45
b	0.30	0.40	0.50
b1	0.31	0.43	0.55
b2	0.65	0.80	0.90
c	0.40	0.50	0.60
D	10.18	10.38	10.58
D1	0.50	0.70	0.90
D2	3.30REF		
D3	2.77REF		
E	9.70	9.90	10.10
E1	8.50REF		
E2	8.50REF		
E3	9.46REF		
e	1.10	1.20	1.30
e2	4.20	4.30	4.40
H	11.48	11.68	11.88
K	4.08REF		
K1	4.18REF		
L	9.13REF		
L1	0.23REF		
L2	0.50	0.60	0.70
L3	1.00	1.20	1.40
L4	1.00	1.20	1.40
M	4.18REF		
M1	0.26REF		
M2	1.10	1.20	1.30
M3	3.10REF		
θ	10.00REF		

All Dimensions in mm

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at [www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)