
## DFNW8 3x3, 0.65P CASE 507AB ISSUE E SCALE 2:1


**DATE 02 JUL 2021** 


## NOTES:


- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
- 2. CONTROLLING DIMENSION: MILLIMETERS
- DIMENSION & APPLIES TO PLATED
   TERMINALS AND IS MEASURED BETWEEN
   0.15 AND 0.30MM FROM THE TERMINAL TIP.
- 4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.
- 5. THIS DEVICE CONTAINS WETTABLE FLANK
  DESIGN FEATURES TO AID IN FILLET
  FORMATION ON THE LEADS DURING MOUNTING.

	MILLIMETERS			
DIM	MIN.	NOM.	MAX.	
Α	0.80	0.85	0.90	
A1	_		0.05	
A3	0.20 REF			
A4	0.10		_	
b	0.25	0.30	0.35	
D	2.95	3.00	3.05	
D2	2.30	2.40	2.50	
E	2.95	3.00	3.05	
E2	1.50	1.60	1.70	
е	0.65 BSC			
K	0.30 REF			
L	0.35	0.40	0.45	
L3	0.00	0.05	0.10	



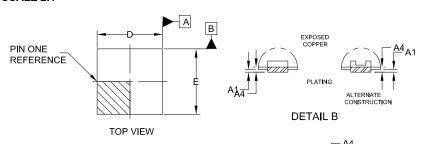





0.10M C A B

0.10(M) 0.05 C

## GENERIC MARKING DIAGRAM\*

**BOTTOM VIEW** 



XXXXXX = Specific Device Code

A = Assembly Location

L = Wafer Lot Y = Year

W = Work Week

■ = Pb-Free Package

(Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb–Free indicator, "G" or microdot " •", may or may not be present. Some products may not follow the Generic Marking.

··-··-································				
DOCUMENT NUMBER:	98AON14978G	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	DFNW8 3x3, 0.65P		PAGE 1 OF 1	

PLATED SURFACES

SECTION C-C

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.