

# NCP6951EVK

## Camera PMIC with Flash LED Driver Evaluation Board User's Manual



ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)

### EVK BOARD USER'S MANUAL

#### Overview

The NCP6951EVK evaluation kit is a full assembled circuit board for evaluation and test of the NCP6951. This document provides documentation, test procedure and equipment set-up for the complete evaluation of the NCP6951. The NCP6951EVK comes with one NCP6951 evaluation board, 1 MCU board for I<sup>2</sup>C master and associated cables.

#### General Description

The NCP6951 integrated circuit is part of the ON Semiconductor mini power management IC family. It is optimized to supply battery powered portable application sub-systems such as camera function, microprocessors, etc. This device integrates one high efficiency 600 mA Step-down DCDC converter with DVS (Dynamic Voltage Scaling), 5 low dropout (LDO) voltage regulators and a 1.5 A Flash LED driver in WLCSP24 package.

#### Features

- 1 Flash LED Driver
  - ◆ Adaptive Boost Supply or Bypass Mode depending on  $V_{in}$  and  $V_{flash}$  Conditions
  - ◆ Programmable Flash Current from 100 mA to 1.6 A by 100 mA Steps
  - ◆ Programmable Safety and Inhibit Timer to Limit the Flash Duration and Protect the Application
- 1 DC-DC Converters (3 MHz, 1  $\mu$ H / 10  $\mu$ F, 600 mA)
  - ◆ Peak Efficiency 95%
  - ◆ Programmable Output Voltage from 0.8 V to 2.3 V by 50 mV Steps
- 5 Low Noise – Low Dropout Regulators
  - ◆ Programmable Output Voltage from 1.7 V to 3.3 V for LDOs 1, 2, 3
  - ◆ Programmable Output Voltage from 1.2 V to 2.85 V for LDOs 4, 5
  - ◆ 200 mA Output Current Capability: LDOs 1, 2, 3, 4
  - ◆ 300 mA Output Current Capability LDO 5
  - ◆ 45  $\mu$ Vrms Low Output Noise
- Control
  - ◆ Fully Programmable through a 400 kHz / 3.4 MHz I<sup>2</sup>C with Pins Selectable I<sup>2</sup>C Address and Interrupt Output
- Small Footprint: 2.57 x 1.65 mm WLCSP 0.4 mm Pitch

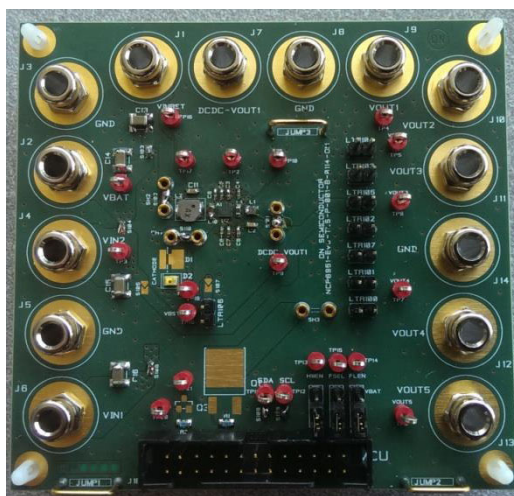


Figure 1. Evaluation Board Picture

# NCP6951EVK

**Table 1. BOARD COMPONENTS DESCRIPTION**

Qty	Reference	Value	PCB Footprint	MFR	Part Number
1	–	NCP6951 PMIC	–	ON Semiconductor	NCP6951
1	C1	Ceramic Capacitor 2.2 $\mu$ F 6.3 V X5R	0402	TDK	C1005X5R0J225K050BC
7	C3 $\rightarrow$ C9	Ceramic Capacitor 1 $\mu$ F 6.3 V X5R	0402	TDK	C1005X5R0J105K05BB
1	C11	Ceramic Capacitor 4.7 $\mu$ F 6.3 V X5R	0603	TDK	C1608X5R0J475K080AB
1	C2	Ceramic Capacitor 10 $\mu$ F 6.3 V X5R	0603	TDK	C1608X5R0J106K080AB
1	C10	Ceramic Capacitor 22 $\mu$ F 6.3 V X5R	0603	TDK	C1608X5R0J226M080AC
4	C13 $\rightarrow$ C16	Ceramic Capacitor 100 $\mu$ F 6.3 V X5R	1210	TDK	C3225X5R0J107M250AC
1	C12	Ceramic Capacitor 100 nF 6.3 V X5R	0402	TDK	
1	L1	Inductor	2016	TOKO	DFE201612R-H-1R0N
1	L2	Inductor		TOKO	FDSD0412-1R0 or DFE252012F-1R0
1	D1			LUMILED	LXCL-PWF4
1	D2			SAMSUNG	SPFCW04301BL
8	LTR100 $\rightarrow$ LTR107	Jumper Header Vertical Mount, 2 positions, 100 mils	100 mils	Tyco Electronics / AMP	5-826629-0
3	J15 $\rightarrow$ J17	Jumper Header Vertical Mount, 3 positions, 100 mils	100 mils	Tyco Electronics / AMP	5-826629-0
14	J1 $\rightarrow$ J14	Banana Jack		Hirschmann Test and Measurement	930160000
1	J18	Connector header 26 pos		3M	N2526-6002-RB
19	TP1 $\rightarrow$ TP19	Test Point		Keystone Electronics	5011
4	Q1, Q3, R1, R2	Not Mounted			
3	JUMP1 $\rightarrow$ JUMP3	Jumper Connector	400 mils	Harwin	D3082-B01
10	S101 $\rightarrow$ S110	Shorted			
4	SH1 $\rightarrow$ SH4	Current sense			
4	Spacer nylon	H1, H2, H3, H4		Richco Plastic co	R908-4

# NCP6951EVK

**Table 2. CONNECTOR DESCRIPTION**

	Pin	Description
<b>Input Power</b>		
J1 → J6	J3, J5	Negative input connected to GND pin
	J1	Flash LED power supply
	J2	DCDC power supply
	J4, J5	LDOs power supply
<b>Input Power</b>		
J7 → J14	J8, J14	Negative output connected to GND pin
	J7	DCDC1 output
	J9	LDO1 output
	J10	LDO2 output
	J11	LDO3 output
	J12	LDO4 output
	J13	LDO5 output
<b>Chip Control</b>		
MCU	SDA	I <sup>2</sup> C data, connect to SDA pin or the 26 pins ribbon cable
	SCL	I <sup>2</sup> C data, connect to SCL pin or the 26 pins ribbon cable
	HWEN	Master enable pin connected to the 26 pins ribbon cable thru J3
	FLEN	Flash LED driver enable pin
	FLSEL	Flash LED driver selectable pin

# NCP6951EVK

## ASSEMBLY LAYER

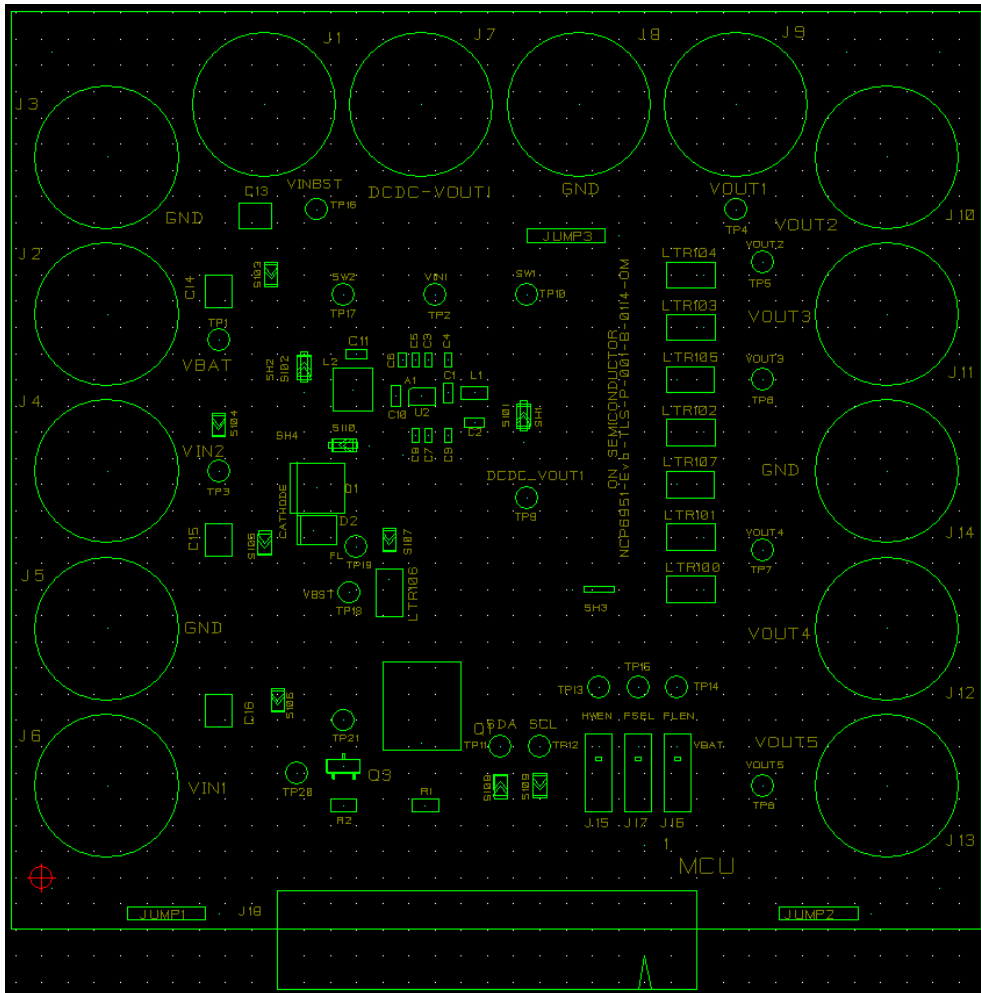


Figure 2. Assembly Layer

# NCP6951EVK

## SCHEMATIC

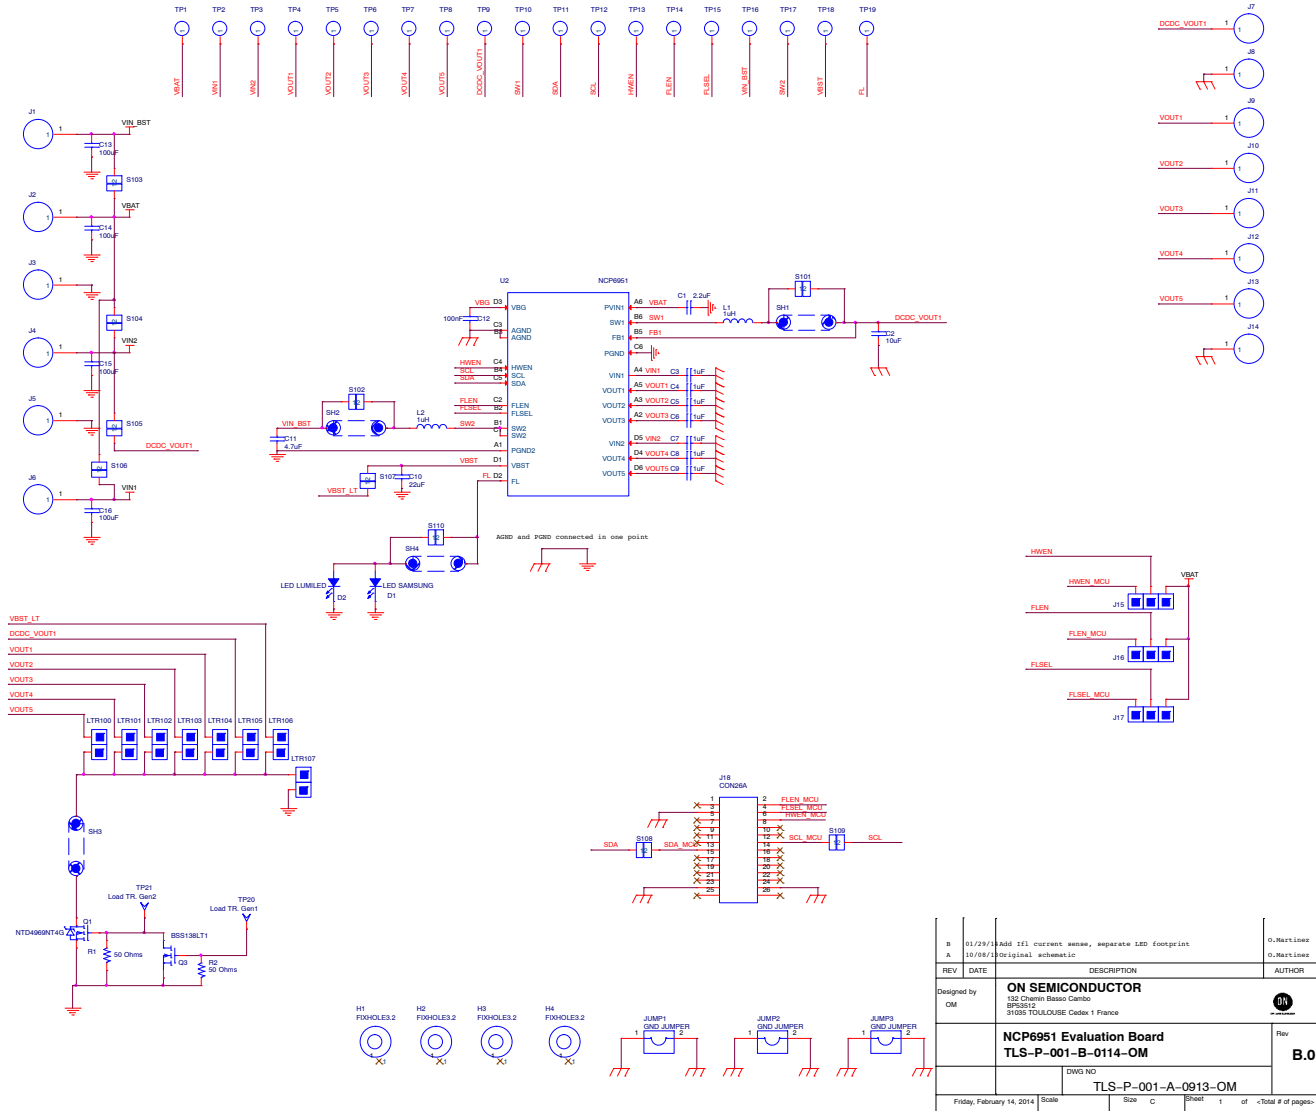


Figure 3. Evaluation Board Schematic

# NCP6951EVK

## SOFTWARE INSTALLATION

Double click on NCP6951\_setup.exe file. Follow the instructions set-up.

It is recommended to copy the NCP6951\_setup.exe to a local directory: If eval kit is already installed, a simple double click on NCP6951.exe will launch the GUI.

**Important notice:** In order to properly install drivers and software, please launch NCP6951\_setup.exe file before connects the MCU board.

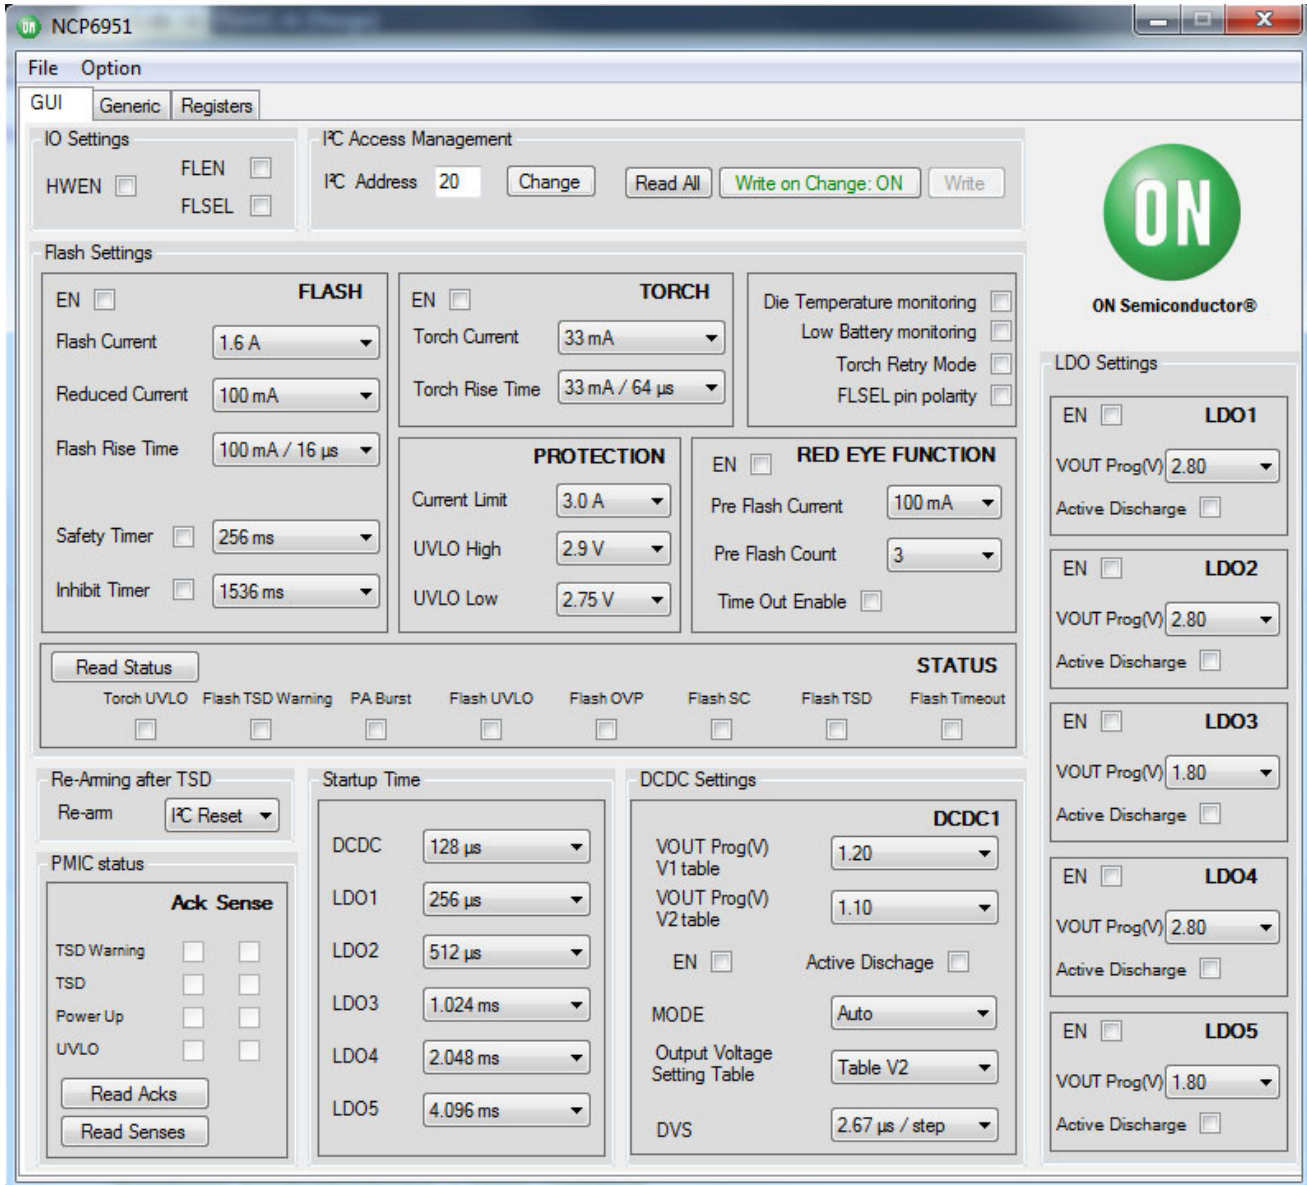


Figure 4.

# NCP6951EVK

## QUICK CONFIGURATION

### Power Supply

NCP6951 requires at least 1 external power supply:  
Vbat (J2) : supply between 2.5V to 5.5V.

### Jumpers Configuration

The HWEN, FLEN and FLSEL jumpers are configured by default to work with the ON Semiconductor I<sup>2</sup>C interface board.

S103, S104 and S106 shunt are soldered to use only one power supply for the DCDCs, LDOs and FLASH.

S101, S102 and S110 are soldered to close the loop of the inside buck and boost converter. To measure the current, user has to unsolder the jumper and use SH1, SH2 or SH4.

### Load

#### *DCDCx Converters*

An electronic load or passive load can be connected between J7 and J8 for DCDC1.

#### *LDOx Regulators*

An electronic load or passive load can be connected between J9 and J8 or J14 for LDO1, between J10 and J8 or J14 for LDO2, J11 and J8 or J14 for LDO3, J12 and J8 or J14 for LDO4, J13 and J8 or J14 for LDO5.

#### *FLASH LED Driver*

Evaluation board is delivered with D1 or D2 soldered.

## PCB LAYOUT

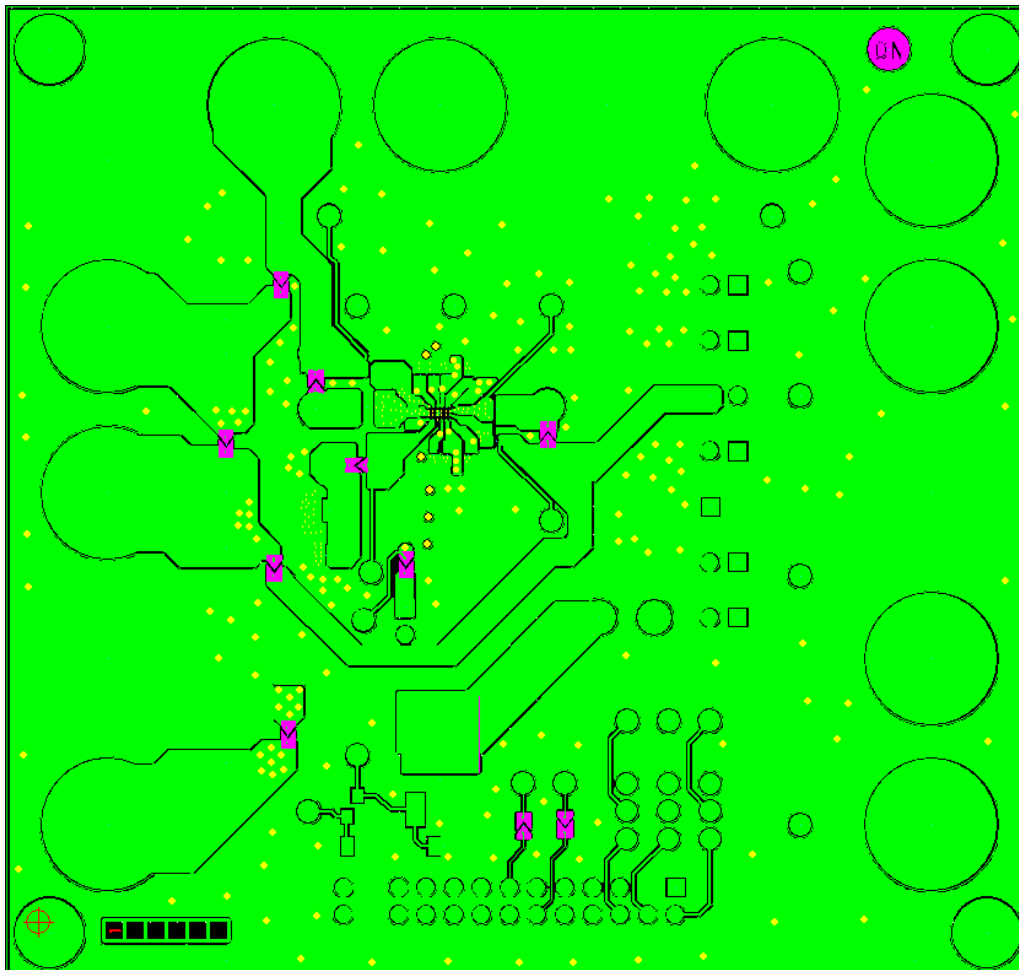


Figure 5. Top Layer

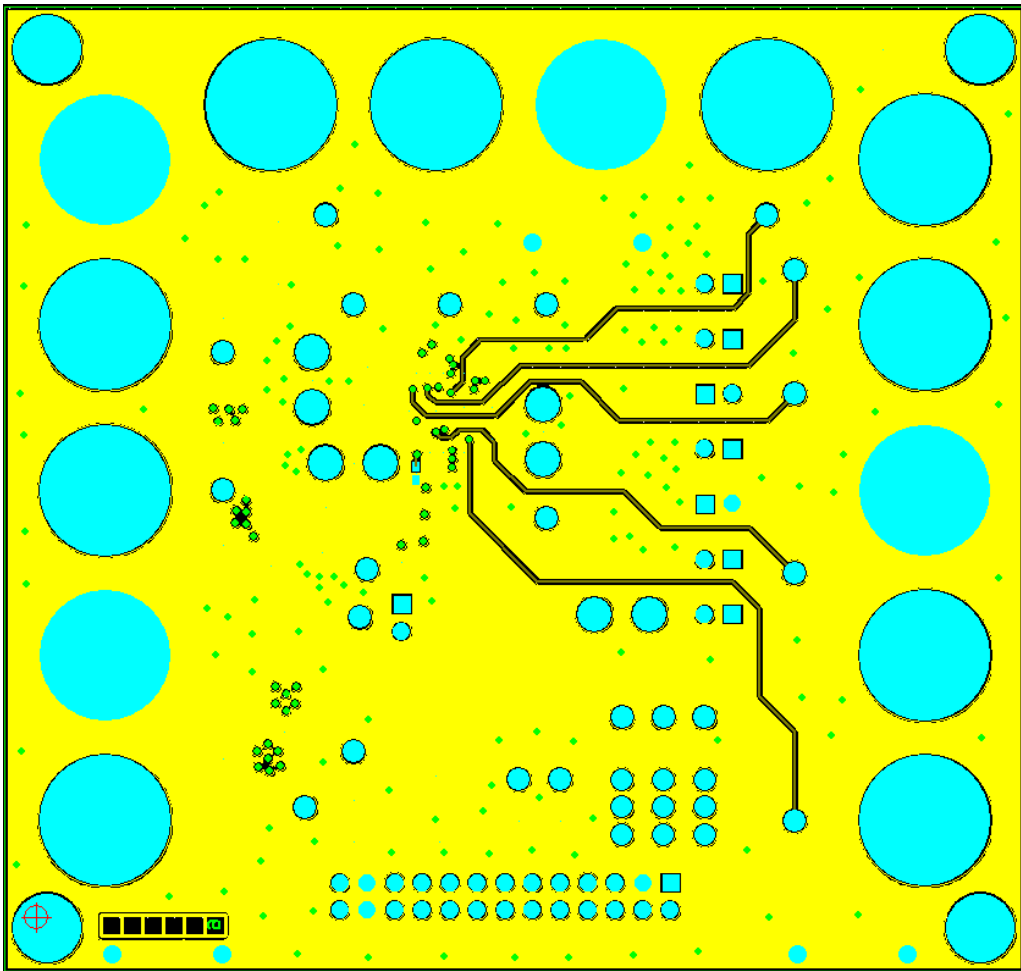


Figure 6. Bottom Layer



**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

The evaluation board/kit (research and development board/kit) (hereinafter the "board") is not a finished product and is not available for sale to consumers. The board is only intended for research, development, demonstration and evaluation purposes and will only be used in laboratory/development areas by persons with an engineering/technical training and familiar with the risks associated with handling electrical/mechanical components, systems and subsystems. This person assumes full responsibility/liability for proper and safe handling. Any other use, resale or redistribution for any other purpose is strictly prohibited.

**THE BOARD IS PROVIDED BY ONSEMI TO YOU "AS IS" AND WITHOUT ANY REPRESENTATIONS OR WARRANTIES WHATSOEVER. WITHOUT LIMITING THE FOREGOING, ONSEMI (AND ITS LICENSORS/SUPPLIERS) HEREBY DISCLAIMS ANY AND ALL REPRESENTATIONS AND WARRANTIES IN RELATION TO THE BOARD, ANY MODIFICATIONS, OR THIS AGREEMENT, WHETHER EXPRESS, IMPLIED, STATUTORY OR OTHERWISE, INCLUDING WITHOUT LIMITATION ANY AND ALL REPRESENTATIONS AND WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, NON-INFRINGEMENT, AND THOSE ARISING FROM A COURSE OF DEALING, TRADE USAGE, TRADE CUSTOM OR TRADE PRACTICE.**

**onsemi** reserves the right to make changes without further notice to any board.

You are responsible for determining whether the board will be suitable for your intended use or application or will achieve your intended results. Prior to using or distributing any systems that have been evaluated, designed or tested using the board, you agree to test and validate your design to confirm the functionality for your application. Any technical, applications or design information or advice, quality characterization, reliability data or other services provided by **onsemi** shall not constitute any representation or warranty by **onsemi**, and no additional obligations or liabilities shall arise from **onsemi** having provided such information or services.

**onsemi** products including the boards are not designed, intended, or authorized for use in life support systems, or any FDA Class 3 medical devices or medical devices with a similar or equivalent classification in a foreign jurisdiction, or any devices intended for implantation in the human body. You agree to indemnify, defend and hold harmless **onsemi**, its directors, officers, employees, representatives, agents, subsidiaries, affiliates, distributors, and assigns, against any and all liabilities, losses, costs, damages, judgments, and expenses, arising out of any claim, demand, investigation, lawsuit, regulatory action or cause of action arising out of or associated with any unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of any products and/or the board.

This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and may not meet the technical requirements of these or other related directives.

FCC WARNING – This evaluation board/kit is intended for use for engineering development, demonstration, or evaluation purposes only and is not considered by **onsemi** to be a finished end product fit for general consumer use. It may generate, use, or radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment may cause interference with radio communications, in which case the user shall be responsible, at its expense, to take whatever measures may be required to correct this interference.

**onsemi** does not convey any license under its patent rights nor the rights of others.

LIMITATIONS OF LIABILITY: **onsemi** shall not be liable for any special, consequential, incidental, indirect or punitive damages, including, but not limited to the costs of requalification, delay, loss of profits or goodwill, arising out of or in connection with the board, even if **onsemi** is advised of the possibility of such damages. In no event shall **onsemi**'s aggregate liability from any obligation arising out of or in connection with the board, under any theory of liability, exceed the purchase price paid for the board, if any.

The board is provided to you subject to the license and other terms per **onsemi**'s standard terms and conditions of sale. For more information and documentation, please visit [www.onsemi.com](http://www.onsemi.com).

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at [www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)