

SiC JFET Through-Hole Lead Bending

AND90332/D

INTRODUCTION

It is often necessary for board assemblers to bend the leads of a through-hole technology (THT) device when constrained by heat sink orientation, board and system space, etc. While the package may be formed into different configurations for board mounting, care must be taken in order avoid damage such as plating strip-off, cracked package, or delamination. This application note contains options and guidelines for reliable lead bending.

BACKGROUND

This application note covers all onsemi THT devices, including TO-220, TO-247 3-lead, TO-247 4-lead, TO-264, and other devices. The onsemi THT packages are designed according to JEDEC standard unless otherwise noted in the datasheet. The THT device package leads are made of copper, which is known to be a hard metal. The copper is alloyed and tempered to 1/2 hard, making it suitable for a semiconductor package assembly. The leads are electroplated with pure Sn with thickness ranging from 300 to 1200 μin, producing a matte surface finish. Minimum and maximum lead thickness is specified in a package outline drawing. The plastic in the package is made of epoxy mold compound (EMC).

 Device drawings are found on the **onsemi** website product information pages.

Figure 1 shows the TO-247 4-lead package structure highlighting critical areas that need to be protected or observed during package lead bending. Other THT packages have the same features.

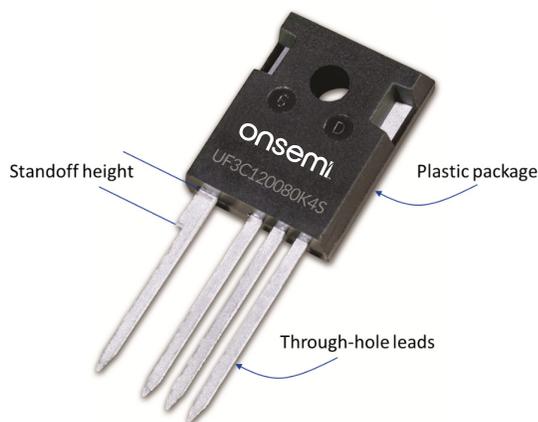


Figure 1. Package Structure, TO-247 4-Lead Shown Here as Example

TYPES OF BENDING

A THT package may be formed in any of the following recommended configurations, as shown below in Figure 2.

The package lead is not allowed to be formed sideways or laterally (package marking face-up) as this could cause package delamination. See Figure 3. High mechanical stress due to sideways bending could create openings, making it possible for moisture intrusion.

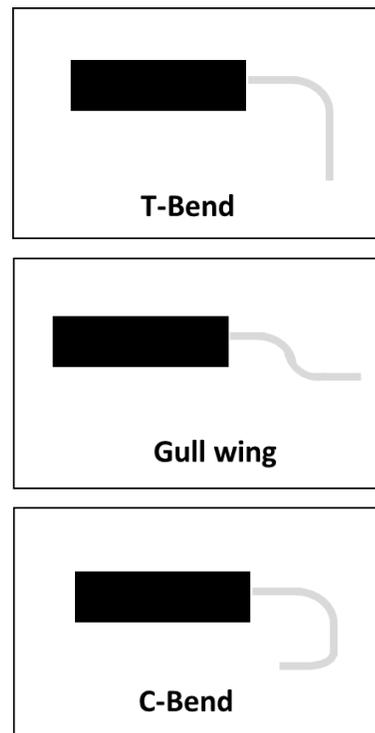


Figure 2. Lead Bending Configurations



Figure 3. Sideways Bending May Cause Damage

LEAD BENDING GUIDELINES

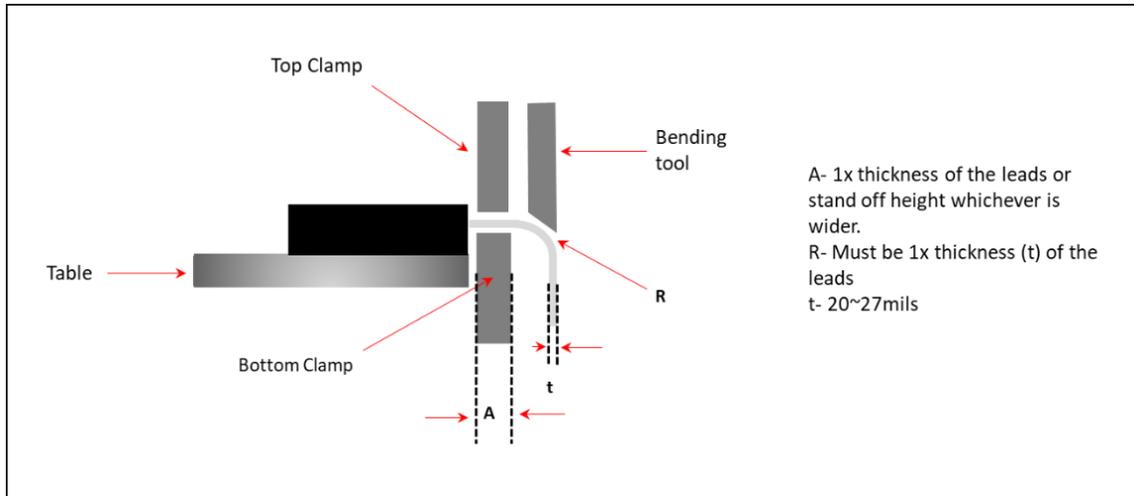


Figure 4. Lead Bending Dimensions

To safely bend the THT package lead, it is important to have clearance from the plastic. A minimum radius of the bend as depicted in Figure 4 must also be maintained to avoid weakening or cracking the leads.

Automated Tool

- Maintain the safe distance as stated in Figure 4.
- Top and bottom leads clamp must not touch the package plastic body or pinch the Sn that could expose the copper. Note: Clamps should not be abrasive.
- Ensure that package body (the plastic) is properly nested onto a flat surface. An ionizer or blower will be good to have to keep clear any debris that could create fulcrum effect when package body is clamped that could result to package crack, dent, scratch, etc.
- In clamping the package plastic body, use of rubber would be the preferred option instead of metal.
- Ensure that equipment is properly grounded for ESD protection.

Manual Tool / Hand-Held

- Maintain the safe distance as stated in Figure 4.
- Use appropriate ESD protection gear, for example, wrist strap, anti-static mat, etc.
- Use a tool to clamp the leads. Avoid putting any force on the plastic body as it could cause package delamination. Use of non-abrasive hand-held tools is preferred.
- For best results, use another tool to bend the leads.

OTHER CONSIDERATIONS

Before doing any lead bending, below are some important items for consideration:

- In general, THT devices are not meant to be surface-mounted, nor to replace an equivalent surface-mount device.
- The package is not moisture sensitivity level (MSL) rated.
- Any device with a fracture or breakage from bending should not be used due to reliability risk.
- Multiple bend cycles should be avoided. Package lead fatigue tests passed up to three bending cycles.

i onsemi has a broad selection of surface-mount packages. Shown here are two examples.



D2PAK-7Lead



DFN8x8

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales