

# **RF Transistor**

30 V, 300 mA,  $f_T = 3.5$  GHz, NPN Single PCP

# 123

- 1: Base 2: Collector
- 3: Emitter

#### SOT-89 / PCP-1 CASE 419AU

## 2SC5551A

#### 特長

高 f<sub>T</sub> である: (f<sub>T</sub> = 3.5 GHz Typ)
大電流である: (I<sub>C</sub> = 300 mA)

● コレクタ損失が大きい: (1.3 W Max)

• These are Pb-Free Devices

#### 製品と外形に伴う情報

● パッケージ名: PCP

• JEITA, JEDEC: SC-62, SOT-89, TO-243

● 最小梱包単位:1,000 Pcs./Reel

#### 絶対最大定格 ABSOLUTE MAXIMUM RATINGS (at Ta = 25°C)


項目	記号	条件	定格値	Unit
コレクタ・ベース電 圧	V <sub>CBO</sub>		40	V
コレクタ・エミッタ 電圧	V <sub>CEO</sub>		30	V
エミッタ・ベース電 圧	V <sub>EBO</sub>		2	V
コレクタ電流	I <sub>C</sub>		300	mA
コレクタ電流 (パルス)	I <sub>CP</sub>		600	mA
コレクタ損失	P <sub>C</sub>	セラミック基板 (250 mm <sup>2</sup> x 0.8 mm) 装着時	1.3	W
接合部温度	Tj		150	°C
保存周囲温度	Tstg		<i>–</i> 55~+150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

最大定格を超えるストレスは、デバイスにダメージを与える危険性があります。これらの定格値を超えた場合は、デバイスの機能性を損ない、ダメージが生じ、信頼性に影響を及ぼす危険性があります。



#### 電気的接続図



#### **ORDERING INFORMATION**

Device	パッケージ名	最小梱包単位 <sup>†</sup>
2SC5551AE-TD-E	PCP (Pb-Free)	1,000 / Tape & Reel
2SC5551AF-TD-E	PCP (Pb-Free)	1,000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

#### 2SC5551A

#### 電気的特性 ELECTRICAL CHARACTERISTICS (at Ta = 25°C)

			定格値			
項目	記号	条件	Min	Тур	Max	Unit
コレクタしゃ断電流	I <sub>CBO</sub>	V <sub>CB</sub> = 20 V, I <sub>E</sub> = 0 A	-	-	1.0	μΑ
エミッタしゃ断電流	I <sub>EBO</sub>	V <sub>EB</sub> = 1 V, I <sub>C</sub> = 0 A	_	-	5.0	μΑ
直流電流増幅率	h <sub>FE</sub> 1	$V_{CE} = 5 \text{ V}, I_{C} = 50 \text{ mA}$	90	-	270	
	h <sub>FE</sub> 2	$V_{CE} = 5 \text{ V}, I_{C} = 300 \text{ mA}$	20	-	-	
利得帯域幅積	f <sub>T</sub>	$V_{CE} = 5 \text{ V}, I_{C} = 50 \text{ mA}$	_	3.5	-	GHz
出力容量	Cob	V <sub>CB</sub> = 10 V, f = 1 MHz	-	2.9	4.0	pF
帰還容量	Cre		_	1.5		pF
コレクタ・エミッタ飽和電圧	V <sub>CE</sub> (sat)	$I_C = 50 \text{ mA}, I_B = 5 \text{ mA}$	_	0.07	0.3	V
ベース・エミッタ飽和電圧	V <sub>BE</sub> (sat)	$I_C = 50 \text{ mA}, I_B = 5 \text{ mA}$	-	0.8	1.2	V

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions. (参考訳)

製品パラメータは、特別な記述が無い限り、記載されたテスト条件に対する電気的特性で示しています。異なる条件下で製品動作を行った時には、電気的特性で示している特性を得られない場合があります。 \*2SC5551A は、50 mA h<sub>FE</sub> により次のように分類している。

Table 1.

ランク	E	F
h <sub>FE</sub>	90~180	135~270




Figure 1.  $I_C - V_{CE}$ 




Figure 2. h<sub>FE</sub>-I<sub>C</sub>

### 2SC5551A




Figure 3. V<sub>CE</sub>(sat) – I<sub>C</sub>





Figure 5. Cob, Cre - V<sub>CB</sub>






Figure 4. |S21e|2 - IC




Figure 6. f<sub>T</sub> - I<sub>C</sub>




Figure 8. P<sub>C</sub> - Ta

## 2SC5551A

## **Land Pattern Example**





Figure 9. Land Pattern Example



#### SOT-89 / PCP-1 CASE 419AU ISSUE O

**DATE 30 APR 2012** 

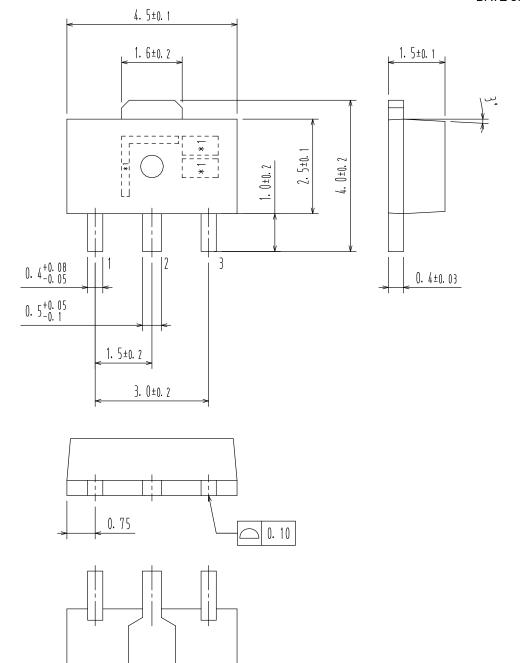

DOCUMENT NUMBER:	98AON79746E	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	SOT-89 / PCP-1		PAGE 1 OF 1

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales