Optical Image Stabilization (OIS) / Auto Focus (AF) Controller & Driver with 40 kB Flash Memory

LC898123F40XC



WLCSP35, 3.22 x 2.3
CASE 567LJ

MARKING DIAGRAM



123F	= Specific Design Code
Y	= Year
M	= Month
ZZ	= Assembly Lot Number

ORDERING INFORMATION

Device	Package	Shipping†
LC898123F40XC−VH	WLCSP35 (Pb−Free)	4000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

Overview

LC898123F40XC is a system solution integrating an ultra−low−power 32−bit DSP, Flash Memory, and analog peripherals for OIS (Optical Image Stabilization) /AF (Auto Focus) control, H−bridge, and linear drivers.

Available in a tiny 3.22 mm × 2.30 mm chipscale package, this device's 40 kB Flash memory enables high level commands and user data for greater system flexibility.

Features

- On−chip Ultra-low-power 32-bit DSP
  - Built−in Software Digital Servo Filter
  - Built−in Software Gyro Filter
- Flash Memory
  - 40 kB Flash Memory to Store Data and DSP Software
- Peripherals
  - Built−in Hall Op Amp with Internal 5×, 10×, 13×, 20×, 40×, and 60× Adjustable Gain
  - 4−channel, 14−bit A/D Converter for Hall Input
  - 3−channel, 3−bit D/A Converter for Hall Offset Setting
  - 3−channel, 8−bit D/A Converter for Hall Bias Setting
  - Built−in 1−MHz 2−wire Serial Interface with Clock Stretch Function
  - Digital Gyro Interface for Various Types of Gyro (SPI Bus)
  - Built−in 41−MHz Oscillator
  - Built−in LDO (Low Drop−Out Regulator)
- Package
  - WLP35 (35-bump chipscale)
  - 3.22 mm × 2.30 mm , 0.45 mm Thick
  - 0.4 mm Bump Pitch
  - Pb−Free and Halogen Free
- Motor Driver
  - OIS:
    2−channel Constant Current Linear Driver (I_{full} = 200 mA)
    2−channel H−bridge PWM Driver (I_{omax} = 220 mA)
  - OP−AF (Unidirection):
    1−channel Constant Current Linear Driver (I_{full} = 150 mA)
  - OP−AF (Bidirection)
    1−channel Constant Current Linear Driver (I_{full} = 150 mA)
  - CL−AF
    1−channel Constant Current Linear Driver (I_{full}l = 150 mA)
    1−channel H−bridge PWM Driver (I_{omax} 150 mA)
- Power Supply Voltage
  - AD/DA/VGA/LDO/OSC:
    AVDD30 = 2.6 V to 3.3 V
  - Digital I/O (Except Gyro I/F) :
    AVDD30 = 2.6 V to 3.3 V
  - Driver:
    VM = Constant Current: 1.75 V to 3.3 V
    H Bridge PWM: 2.6 V to 3.3 V
  - Core Logic / Gyro Interface I/O
    Generated by Internal LDO:
    DVDD15 = 1.55 V Output (Typ)

© Semiconductor Components Industries, LLC, 2017

BLOCK DIAGRAM

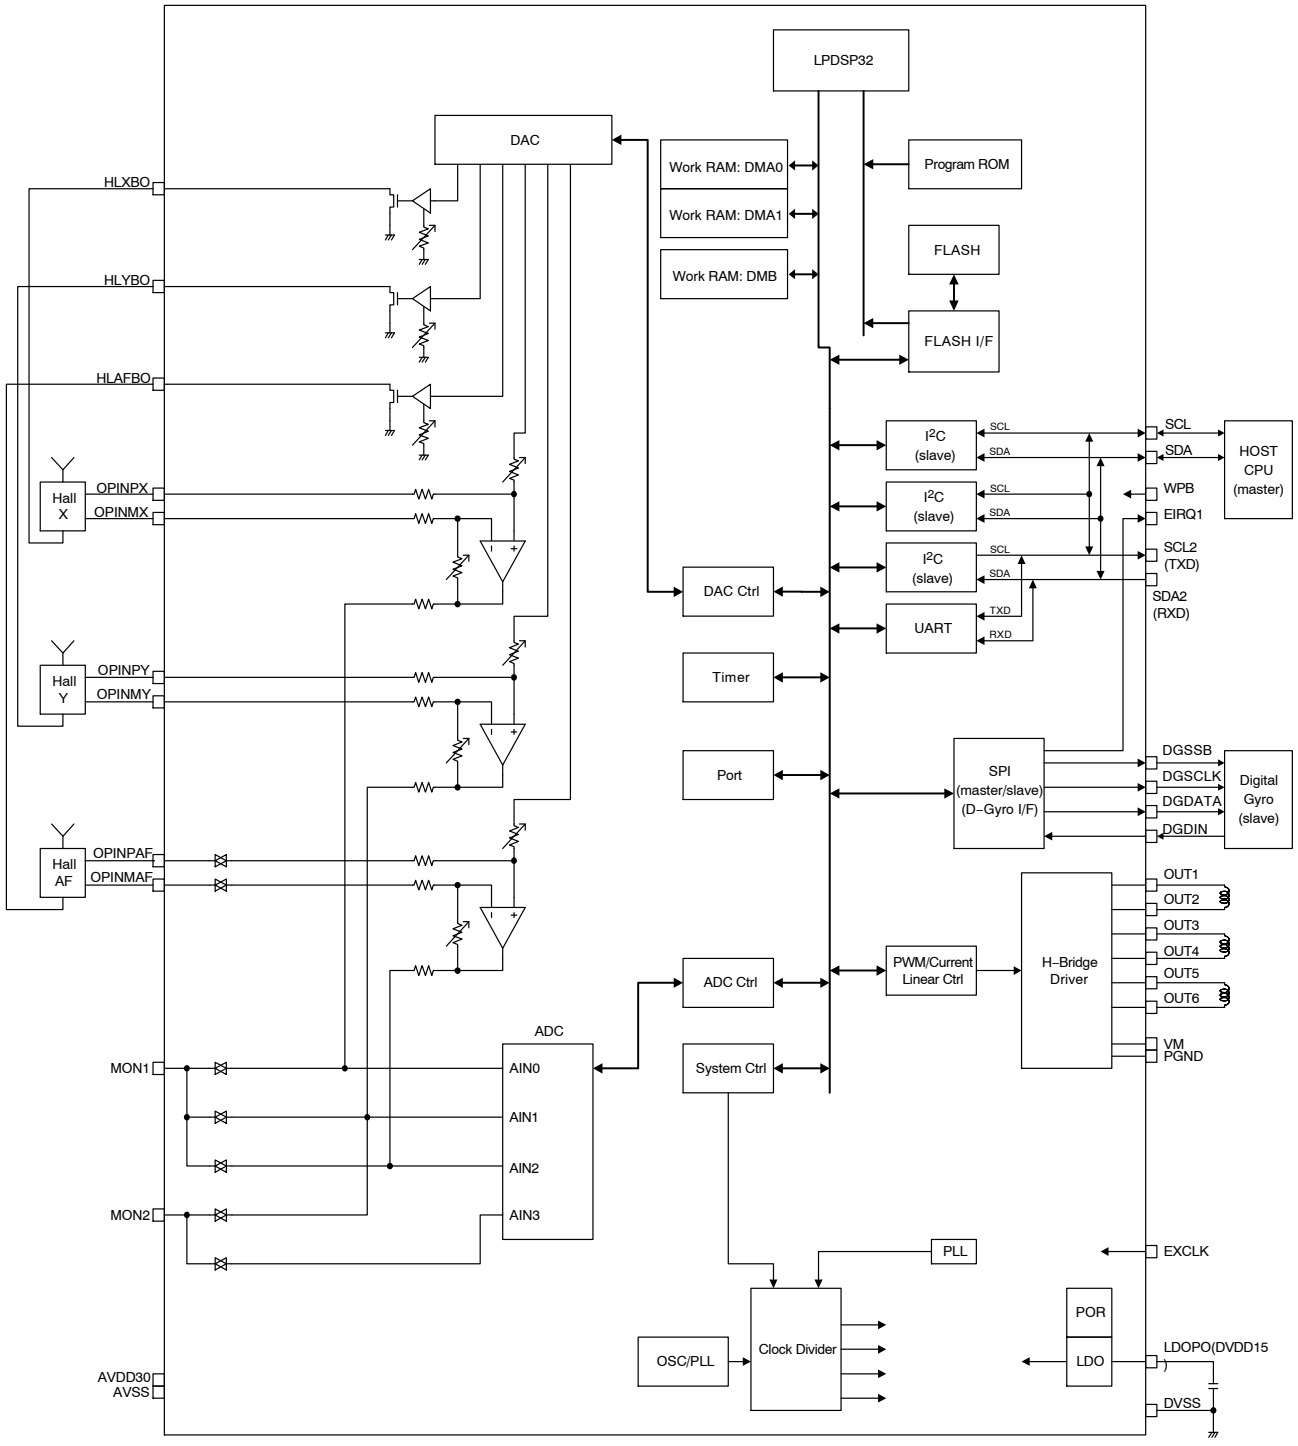

Figure 1. Block Diagram

APPLICATION DIAGRAM

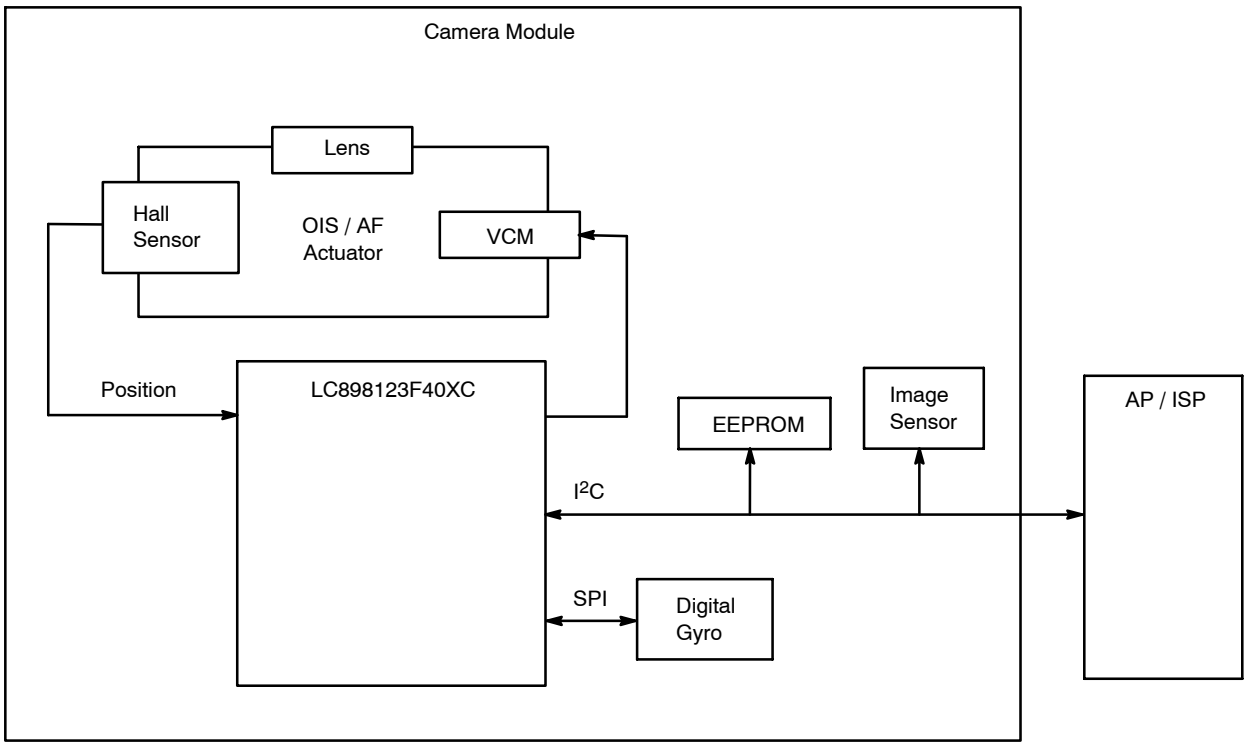

Figure 2. Application Diagram

PIN ASSIGN

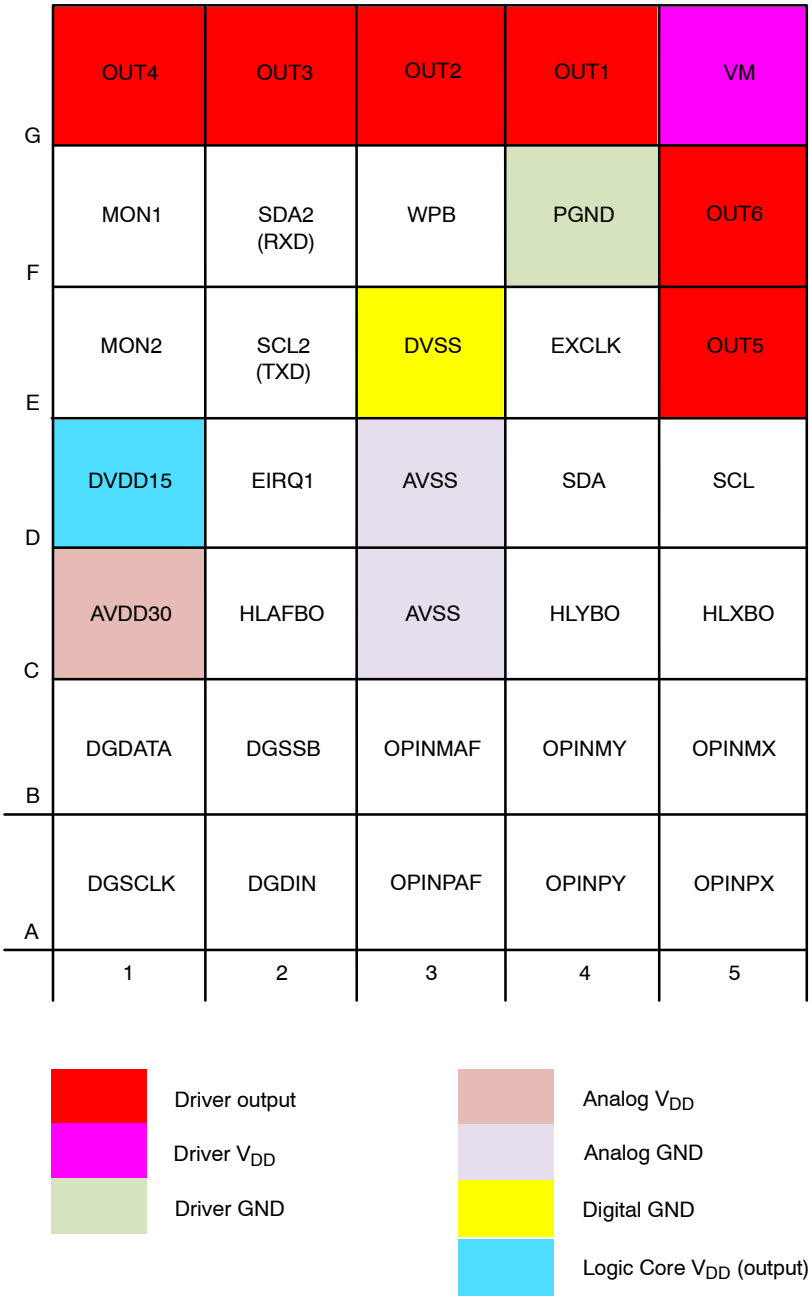

Figure 3. Pin Assign (Bottom View)

PIN DESCRIPTION

PIN DESCRIPTION

Pin No.	Pin	I/O Atr	I/O Pwr (V)	Primary Function	Sub Functions	Init
A1	DGSCLK	B	1.55	Digital Gyro I/F Clock Input	Digital Gyro Clock Output	Z
				Digital Gyro I/F Clock Output	Internal Signal Monitor	
A2	DGDIN	B	1.55	Digital Gyro Data Input (4 Wired)	I^2C Data I/O for DAC Monitor	Z
					Internal Signal Monitor	
A3	OPINPAF	I	2.8	AF Hall Opamp Input Plus	–	–
A4	SDA	B	2.8	OIS Hall Y Opamp Input Plus	–	–
A5	IOVDD	P	2.8	OIS Hall X Opamp Input Plus	–	–
B1	DGDATA	B	1.55	GPIO Input	Digital Gyro I/F Data Output (4 Wired)	Z
					Digital Gyro I/F Data I/O (3 Wired)	
					Internal Signal Monitor	
B2	DGSSB	B	1.55	Digital Gyro I/F Chip Select Input	Digital Gyro I/F Chip Select Output	Z
				Digital Gyro I/F Chip Select Output	Internal Signal Monitor	
B3	OPINMAF	I	2.8	AF Hall OpAmp Input Minus	–	–
B4	OPINMY	I	2.8	OIS Hall Y Opamp Input Minus	–	–
B5	OPINMX	I	2.8	OIS Hall X Opamp Input Minus	–	–
C1	AVDD30	P	–	Analog Power (2.6 V to 3.3 V)	–	–
C2	HLAFBO	O	2.8	AF Hall Bias Output	–	–
C3	AVSS	P	–	Analog GND	–	–
C4	HLYBO	O	2.8	OIS Hall Y Bias Output	–	–
C5	HLXBO	O	2.8	OIS Hall X Bias Output	–	–
D1	DVDD15	P	–	Internal LDO Power Output	–	–
D2	EIRQ1	B	2.8	External IRQ1	I^2C Data I/O for DAC Monitor	D
					UART Data Output (TXD)	
					SPI I/F Chip Select Output	
				External Clock Input	Internal Signal Monitor	
					Servo Monitor Analog Input	
D3	AVSS	P	–	Analog GND	–	–
D4	SDA	B	2.8	I^2C Data	–	Z
D5	SCL	B	2.8	I^2C Clock	–	Z
E1	MON2	B	2.8	(Debugger Data Input)	I^2C Data I/O for DAC Monitor	Z
					UAR T Data Input (RXD)	
					Servo Monitor Analog Out	
					Internal Signal Monitor	
E2	SCL2 (TXD)	B	2.8	I^2C Clock for 2^{nd} I^2C	I^2C Data I/O for DAC Monitor	Z
					UART Data Output	
					Internal Signal Monitor	
E3	DVSS	P	–	Logic GND	–	–
E4	EXCLK	B	2.8	External Clock Input	I^2C Data I/O for DAC Monitor	D
				External IRQ1	Internal Signal Monitor	
E5	OUT5	O	2.8	AF Driver Output (H−Bridge, Linear)	–	–

PIN DESCRIPTION (continued)

Pin No.	Pin	I/O Atr	I/O Pwr (V)	Primary Function	Sub Functions	Init
F1	MON1	B	2.8	(Debugger Data Input)	I^2C Data I/O for DAC Monitor	L
					UART Data Output (TXD)	
					Servo Monitor Analog Out	
					Internal Signal Monitor	
F2	SDA2 (RXD)	B	2.8	I^2C Data for 2^{nd} I^2C	I^2C Data I/O for DAC Monitor	Z
					UART Data Input	
					Internal Signal Monitor	
F3	WPB	I	2.8	Write Protect for Flash	–	D
F4	PGND	P	–	Driver GND	–	–
F5	OUT6	O	2.8	AF Driver Output (H−Bridge, Linear)	–	–
G1	OUT4	O	2.8	OIS Driver Output	–	–
G2	OUT3	O	2.8	OIS Driver Output	–	–
G3	OUT2	O	2.8	OIS Driver Output	–	–
G4	OUT1	O	2.8	OIS Driver Output	–	–
G5	VM	P	–	Driver Power (2.6 V to 3.3 V)	–	–

ELECTRICAL CHARACTERISTICS

ABSOLUTE MAXIMUM RATINGS (AVSS = 0 V, DVSS = 0 V, PGND = 0 V)

Parameter	Symbol	Conditions	Ratings	Unit
Power Supply Voltage	$V_{AD}30$ max	Ta ≤ 25°C	−0.3 to +4.6	V
	V_M max	Ta ≤ 25°C	−0.3 to +4.6	V
Input Voltage (Except DGDATA, DGSSB, DGSCLK, DGDIN)	$V_{AI}30$	Ta ≤ 25°C	−0.3 to $V_{AI}30$ + 0.3	V
Input Voltage (DGDATA, DGSSB, DGSCLK, DGDIN)	$V_{LDO}18$	Ta = −30°C to +85°C	−0.3 to + 1.872	V
Storage Temperature	Tstg		−55 to +125	°C
Operating Temperature	Topr		−30 to +85	°C
Output Continuous Current	Iomax	OUT1 to 4	210	mA
		OUT5, OUT6	157.5	mA

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

ALLOWABLE OPERATING RATINGS (Ta = −30 to +85°C, AVSS = 0 V, DVSS = 0 V, PGND = 0 V)

Parameter	Symbol	Min	Typ	Max	Unit
3.0 V POWER SUPPLY (AVDD30)					
Power Supply Voltage	$V_{AD}30$	2.6	2.8	3.3	V
Input Voltage Range	V_{IN}	0	–	$V_{AD}30$	V
3.0 V POWER SUPPLY (VM)					
Power Supply Voltage (H−Bridge PWM)	V_M30	2.6	2.8	3.3	V
Power Supply Voltage (Constant Current)		1.75	2.8	3.3	V
Input Voltage Range	V_{INM}	0	–	V_M30	V

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

DC CHARACTERISTICS: INPUT/OUTPUT

(T_A = −30 to 85°C, AVSS = 0 V, PGND = 0 V, AVDD30 = 2.7 to 3.3 V, IOVDD = 1.7 to 3.3 V)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit	Applicable Pins
High−level Input Voltage	V_{IH}	CMOS Schmitt	1.36	–	–	V	SCL2(TXD), SDA2(RXD), EXCLK
Low−level Input Voltage	V_{IL}		–	–	0.39	V	
High−level Input Voltage	V_{IH}	CMOS Schmitt	1.26	–	–	V	DGDIN, DGSSB, DGSCLK, DGDATA
Low−level Input Voltage	V_{IL}		–	–	0.35	V	
High−level Input Voltage	V_{IH}	CMOS Schmitt	1.40	–	–	V	SCL, SDA
Low−level Input Voltage	V_{IL}		–	–	0.40	V	
High−level Input Voltage	V_{IH}	CMOS Schmitt	1.48	–	–	V	EIRQ1, WPB
Low−level Input Voltage	V_{IL}		–	–	0.37	V	
High−level Input Voltage	V_{IH}	CMOS Supported	1.40	–	–	V	MON1, MON2
Low−level Input Voltage	V_{IL}		–	–	0.51	V	
High−level Output Voltage	V_{OH}	I_{OH} = −2 mA	AVDD30 −0.4	–	–	V	SCL2(TXD), SDA2(RXD), EXCLK, EIRQ1, MON1, MON2
High−level Output Voltage	V_{OH}	I_{OH} = −0.1 mA	1.32	–	–	V	DGDIN, DGSSB, DGSCLK, DGDATA

DC CHARACTERISTICS: INPUT/OUTPUT (continued)
(T_A = −30 to 85°C, AVSS = 0 V, PGND = 0 V, AVDD30 = 2.7 to 3.3 V, IOVDD = 1.7 to 3.3 V)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit	Applicable Pins
Low−level Output Voltage	V_{OL}	I_{OL} = 2 mA	−	−	0.2	V	SCL2(TXD), SDA2(RXD), DGDIN, DGSSB, DGSCLK, DGDATA, EXCLK, SDA, SCL
Low−level Output Voltage	V_{OL}	I_{OL} = 2 mA	−	−	0.4	V	MON1,MON2,EIRQ1
Analog Input Voltage	VAI		AVSS	−	AVDD30	V	OPINPX, OPINPY, OPINPAF, OPINMX, OPINMY, OPINMAF
Pull Up Resistor	Rup		50	−	200	kΩ	MON1, MON2, EIRQ1, SCL2(TXD), SD2(RXD)
Pull Up Resistor	Rup		180	−	800	kΩ	DGDATA, DGDIN, DGSSB, DGSCLK
Pull Down Resistor	Rdn		50	−	220	kΩ	MON1, MON2, EIRQ1, SCL2(TXD), SDA2(RXD), EXCLK, WPB
Pull Down Resistor	Rdn		120	−	500	kΩ	DGDATA, DGDIN, DGSSB, DGSCLK

DRIVER OUTPUT
(Ta = −30 to +85°C, AVSS = 0 V, DVSS = 0 V, PGND = 0 V)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output Current, OUT1−OUT4	I_{full}	Full code	−	200	−	mA
Output Current, OUT5, OUT6		Full code OP−AF (bidirection / unidirection) CL−AF	−	150	−	mA

NON−VOLATILE MEMORY CHARACTERISTICS

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Endurance	EN		−	−	1000	Cycles
Data Retention	RT		10	−	−	Years

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

AC CHARACTERISTICS

Power Sequence

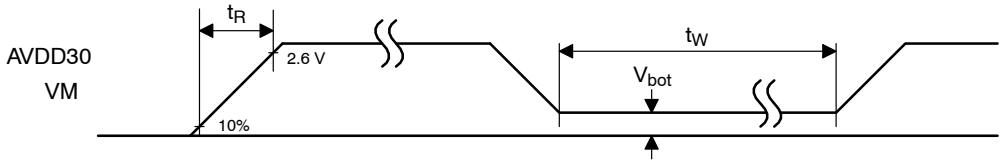

Figure 4.

Table 1.

Item	Symbol	Min	Typ	Max	Unit
Rise Time	t_R	–	–	3	ms
Wait Time	t_W	100	–	–	ms
Bottom Voltage	V_{bot}	–	–	0.2	V

Injection order between AVDD30 and VM is below.

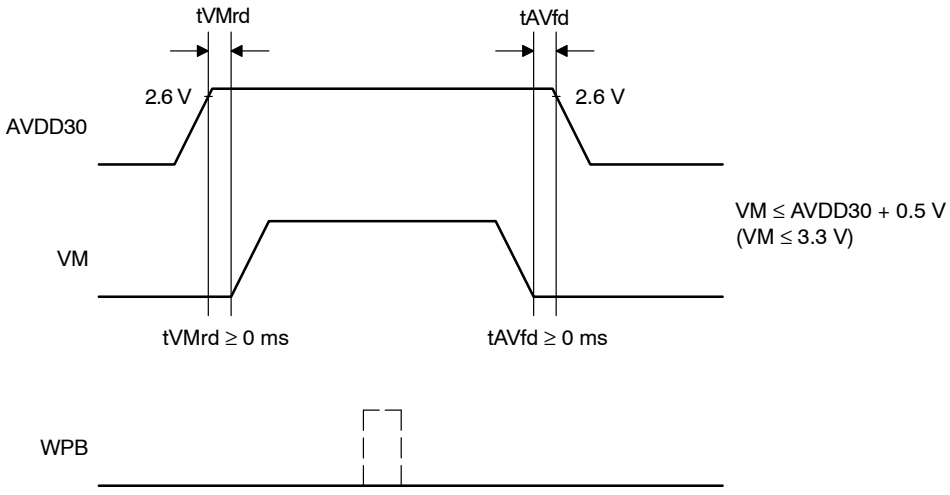

Figure 5. Injection Order between AVDD30 and VM

WPB must be open or pulled down normally. When Flash is erased or programmed, WPB must be held High. SDA, SCL, EXCLK, and WPB will tolerate 3 V input at the time of power off. Power must remain applied to the device during flash access in order to prevent unintentional rewriting of the flash memory.

Data in flash memory may be rewritten unintentionally if the specified power sequencing techniques are not kept.

Two Wire Serial Interface Timing

The device's communication protocol is compatible with I^2C (Fast mode Plus). This circuit has clock stretch function.

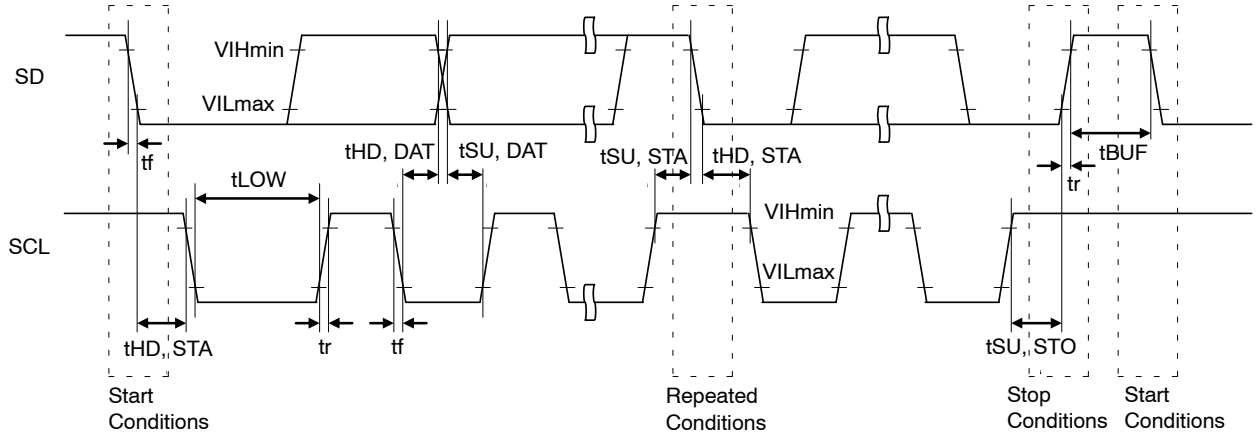

Figure 6. 2−wire Serial Interface Timing

Table 2.

Item	Symbol	Pin Name	Min	Typ	Max	Units
SCL Clock Frequency	Fscl	SCL	–	–	1000	kHz
START Condition Hold Time	tHD;STA	SCL SDA	0.26	–	–	μs
SCL Clock Low Period	tLOW	SCL	0.5	–	–	μs
SCL Clock High Period	tHIGH	SCL	0.26	–	–	μs
Setup Time for Repetition START Condition	tSU;STA	SCL SDA	0.26	–	–	μs
Data Hold Time	tHD;DAT	SCL SDA	0 (Note 1)	–	0.9	μs
Data Setup Time	tSU;DAT	SCL SDA	50	–	–	ns
SDA, SCL Rising Time	t_r	SCL SDA	–	–	120	ns
SDA, SCL Falling Time	t_f	SCL SDA	–	–	120	ns
STOP Condition Setup Time	tSU;STO	SCL SDA	0.26	–	–	μs
Bus Free Time between STOP and START	tBUF	SCL SDA	0.5	–	–	μs

1. Although the I^2C specification defines a condition that 300 ns of hold time is required internally, LC898123F40XC is designed for a condition with typ. 40 ns of hold time. If SDA signal is unstable around falling point of SCL signal, please implement an appropriate countermeasure on board, such as inserting a resistor.

onsemi is licensed by the Philips Corporation to carry the I^2C bus protocol

MECHANICAL CASE OUTLINE
PACKAGE DIMENSIONS

ON Semiconductor®



SCALE 4:1

WLCSP35, 3.22x2.3
CASE 567LJ
ISSUE B

DATE 17 MAR 2017

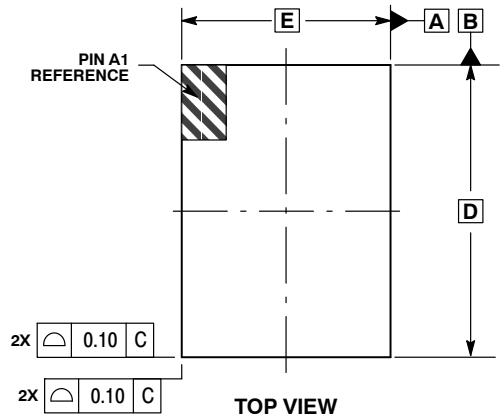

TOP VIEW



DETAIL A

NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DATUM C, THE SEATING PLANE, IS DEFINED BY THE SPHERICAL CROWNS OF THE SOLDER BALLS.
4. COPLANARITY APPLIES TO SPHERICAL CROWNS OF SOLDER BALLS.

	MILLIMETERS	
DIM	MIN	MAX
A	0.35	0.45
A1	0.03	0.13
A3	0.025 REF	
b	0.15	0.25
D	3.22 BSC	
E	2.30 BSC	
e	0.40 BSC	

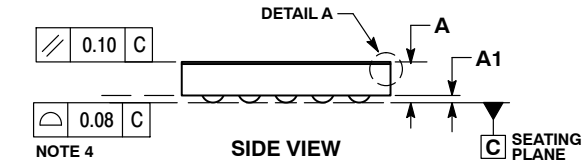

SIDE VIEW

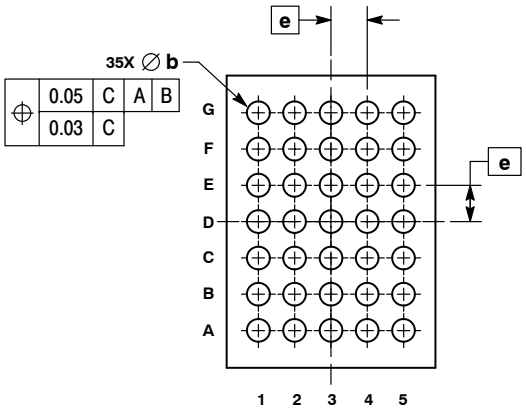

BOTTOM VIEW

RECOMMENDED SOLDERING FOOTPRINT*

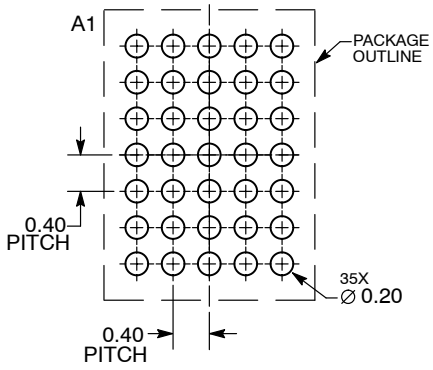

DIMENSIONS: MILLIMETERS

*For additional information on our Pb−Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	**98AON96722F**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	**WLCSP35, 3.22X2.3**		**PAGE 1 OF 1**

ON Semiconductor and ON are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2019

onsemi, ONSEMI , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales