Quad 2-Channel Analog Multiplexer/Demultiplexer

MC14551B

The MC14551B is a digitally-controlled analog switch. This device implements a 4PDT solid state switch with low ON impedance and very low OFF Leakage current. Control of analog signals up to the complete supply voltage range can be achieved.

Features

- Triple Diode Protection on All Control Inputs
- Supply Voltage Range = 3.0 Vdc to 18 Vdc
- Analog Voltage Range ($V_{DD} - V_{EE}$) = 3.0 to 18 V
  Note: V_{EE} must be ≤ V_{SS}
- Linearized Transfer Characteristics
- Low Noise − 12 nV$\sqrt{\text{Cycle}}$, f ≥ 1.0 kHz typical
- For Low R_{ON}, Use The HC4051, HC4052, or HC4053 High-Speed CMOS Devices
- Switch Function is Break Before Make
- NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- This Device is Pb-Free and is RoHS Compliant

MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
DC Supply Voltage Range (Referenced to V_{EE}, $V_{SS} \geq V_{EE}$)	V_{DD}	−0.5 to + 18.0	V
Input or Output Voltage (DC or Transient) (Referenced to V_{SS} for Control Input and V_{EE} for Switch I/O)	V_{in}, V_{out}	−0.5 to V_{DD} + 0.5	V
Input Current (DC or Transient), per Control Pin	I_{in}	±10	mA
Switch Through Current	I_{sw}	±25	mA
Power Dissipation, per Package (Note 1)	P_D	500	mW
Ambient Temperature Range	T_A	−55 to + 125	°C
Storage Temperature Range	T_{stg}	−65 to + 150	°C
Lead Temperature (8-Second Soldering)	T_L	260	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected. Operating the device outside its recommended conditions, but still within its maximum rated limits may not cause immediate damage. However, doing so can lead to reduced performance, unpredictable behavior, and potentially shorten the device's lifespan or reliability.

1. Temperature Derating: "D/DW" Package: −7.0 mW/°C From 65 °C To 125 °C

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation, V_{in} and V_{out} should be constrained to the range $V_{SS} \leq (V_{in}$ or $V_{out}) \leq V_{DD}$ for control inputs and $V_{EE} \leq (V_{in}$ or $V_{out}) \leq V_{DD}$ for Switch I/O.

Unused inputs must always be tied to an appropriate logic voltage level (e.g., either V_{SS}, V_{EE} or V_{DD}). Unused outputs must be left open.



SOIC-16
D SUFFIX
CASE 751B

PIN ASSIGNMENT



MARKING DIAGRAM



A = Assembly Location
WL, L = Wafer Lot
YY, Y = Year
WW, W = Work Week
G = Pb-Free Package

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

© Semiconductor Components Industries, LLC, 2014

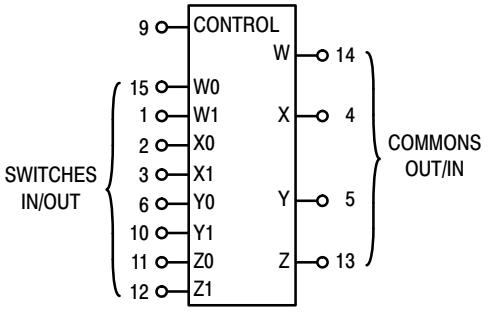

V_{DD} = Pin 16
V_{SS} = Pin 8
V_{EE} = Pin 7

Control	ON
0	W0 X0 Y0 Z0
1	W1 X1 Y1 Z1

NOTE: Control Input referenced to V_{SS}, Analog Inputs and Outputs reference to V_{EE}. V_{EE} must be ≤ V_{SS}.

ORDERING INFORMATION

Device	Package	Shipping†
MC14551BDG	SOIC-16 (Pb-Free)	48 Units / Rail
MC14551BDR2G	SOIC-16 (Pb-Free)	2500 / Tape & Reel
NLV14551BDR2G*	SOIC-16 (Pb-Free)	2500 / Tape & Reel

† For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

* NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.

Share Feedback
Your Opinion Matters

ELECTRICAL CHARACTERISTICS

Characteristic	V_{DD}	Test Conditions	Symbol	−55 °C Min	−55 °C Max	25 °C Min	25 °C Typ (Note 2)	25 °C Max	125 °C Min	125 °C Max	Unit
SUPPLY REQUIREMENTS (Voltages Referenced to V_{EE})											
Power Supply Voltage Range	−	$V_{DD} - 3.0 \geq V_{SS} \geq V_{EE}$	V_{DD}	3.0	18	3.0	−	18	3.0	18	V
Quiescent Current Per Package	5.0 10 15	Control Inputs: V_{in} = V_{SS} or V_{DD}, Switch I/O: $V_{EE} \leq V_{I/O} \leq V_{DD}$, and $\Delta V_{switch} \leq$ 500 mV (Note 3)	I_{DD}	− − −	5.0 10 20	− − −	0.005 0.010 0.015	5.0 10 20	− − −	150 300 600	μA
Total Supply Current (Dynamic Plus Quiescent, Per Package)	5.0 10 15	T_A = 25 °C only (The channel component, $(V_{in} - V_{out})/R_{on}$, is not included.)	$I_{D(AV)}$	Typical			(0.07 μA/kHz) f + I_{DD} (0.20 μA/kHz) f + I_{DD} (0.36 μA/kHz) f + I_{DD}				μA
CONTROL INPUT (Voltages Referenced to V_{SS})											
Low-Level Input Voltage	5.0 10 15	R_{on} = per spec, I_{off} = per spec	V_{IL}	− − −	1.5 3.0 4.0	− − −	2.25 4.50 6.75	1.5 3.0 4.0	− − −	1.5 3.0 4.0	V
High-Level Input Voltage	5.0 10 15	R_{on} = per spec, I_{off} = per spec	V_{IH}	3.5 7.0 11	− − −	3.5 7.0 11	2.75 5.50 8.25	− − −	3.5 7.0 11	− − −	V
Input Leakage Current	15	V_{in} = 0 or V_{DD}	I_{in}	−	±0.1	−	±0.00001	±0.1	−	±1.0	μA
Input Capacitance	−		C_{in}	−	−	−	5.0	7.5	−	−	pF
SWITCHES IN/OUT AND COMMONS OUT/IN — W, X, Y, Z (Voltages Referenced to V_{EE})											
Recommended Peak-to-Peak Voltage Into or Out of the Switch	−	Channel On or Off	$V_{I/O}$	0	V_{DD}	0	−	V_{DD}	0	V_{DD}	V_{p-p}
Recommended Static or Dynamic Voltage Across the Switch (Note 3) (Figure 3)	−	Channel On	ΔV_{switch}	0	600	0	−	600	0	300	mV
Output Offset Voltage	−	V_{in} = 0 V, No Load	V_{OO}	−	−	−	10	−	−	−	μV
ON Resistance	5.0 10 15	$\Delta V_{switch} \leq$ 500 mV (Note 3), $V_{in} = V_{IL}$ or V_{IH} (Control), and V_{in} = 0 to V_{DD} (Switch)	R_{on}	− −	800 400 220	− − −	250 120 80	1050 500 280	− − −	1200 520 300	Ω
ΔON Resistance Between Any Two Channels in the Same Package	5.0 10 15		ΔR_{on}	− − −	70 50 45	− − −	25 10 10	70 50 45	− − −	135 95 65	Ω
Off-Channel Leakage Current (Figure 8)	15	$V_{in} = V_{IL}$ or V_{IH} (Control) Channel to Channel or Any One Channel	I_{off}	−	±100	−	±0.05	±100	−	±1000	nA
Capacitance, Switch I/O	−	Switch Off	$C_{I/O}$	−	−	−	10	−	−	−	pF
Capacitance, Common O/I	−		$C_{O/I}$	−	−	−	17	−	−	−	pF
Capacitance, Feedthrough (Channel Off)	− −	Pins Not Adjacent Pins Adjacent	$C_{I/O}$	− −	− −	− −	0.15 0.47	− −	− −	− −	pF

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

2. Data labeled “Typ” is not to be used for design purposes, but is intended as an indication of the IC’s potential performance.
3. For voltage drops across the switch (ΔV_{switch}) > 600 mV (> 300 mV at high temperature), excessive V_{DD} current may be drawn; i.e. the current out of the switch may contain both V_{DD} and switch input components. The reliability of the device will be unaffected unless the Maximum Ratings are exceeded. (See first page of this data sheet.)

Share Feedback
Your Opinion Matters

ELECTRICAL CHARACTERISTICS (C_L = 50 pF, T_A = 25 °C, $V_{EE} \le V_{SS}$)

Characteristic	Symbol	$V_{DD} - V_{EE}$ Vdc	Min	Typ (Note 4)	Max	Unit
Propagation Delay Times Switch Input to Switch Output (R_L = 10 kΩ) t_{PLH}, t_{PHL} = (0.17 ns/pF) C_L + 26.5 ns t_{PLH}, t_{PHL} = (0.08 ns/pF) C_L + 11 ns t_{PLH}, t_{PHL} = (0.06 ns/pF) C_L + 9.0 ns	t_{PLH}, t_{PHL}	 5.0 10 15	–	 35 15 12	 90 40 30	ns
Control Input to Output (R_L = 10 kΩ) V_{EE} = V_{SS} (Figure 4)	t_{PLH}, t_{PHL}	 5.0 10 15	–	 350 140 100	 875 350 250	ns
Second Harmonic Distortion R_L = 10 kΩ, f = 1 kHz, V_{in} = 5 V_{p-p}	–	10	–	0.07	–	%
Bandwidth (Figure 5) R_L = 1 kΩ, V_{in} = 1/2 $(V_{DD} - V_{EE})_{p-p}$, 20 Log (V_{out}/V_{in}) = − 3 dB, C_L = 50 pF	BW	10	–	17	–	MHz
Off Channel Feedthrough Attenuation, Figure 5 R_L = 1 kΩ, V_{in} = 1/2 $(V_{DD} - V_{EE})_{p-p}$, f_{in} = 55 MHz	–	10	–	−50	–	dB
Channel Separation (Figure 6) R_L = 1 kΩ, V_{in} = 1/2 $(V_{DD} - V_{EE})_{p-p}$, f_{in} = 3 MHz	–	10	–	−50	–	dB
Crosstalk, Control Input to Common O/I, Figure 7 R1 = 1 kΩ, R_L = 10 kΩ, Control t_r = t_f = 20 ns	–	10	–	75	–	mV

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

4. Data labelled “Typ” is not to be used for design purposes but is intended as an indication of the IC’s potential performance.

Share Feedback
Your Opinion Matters

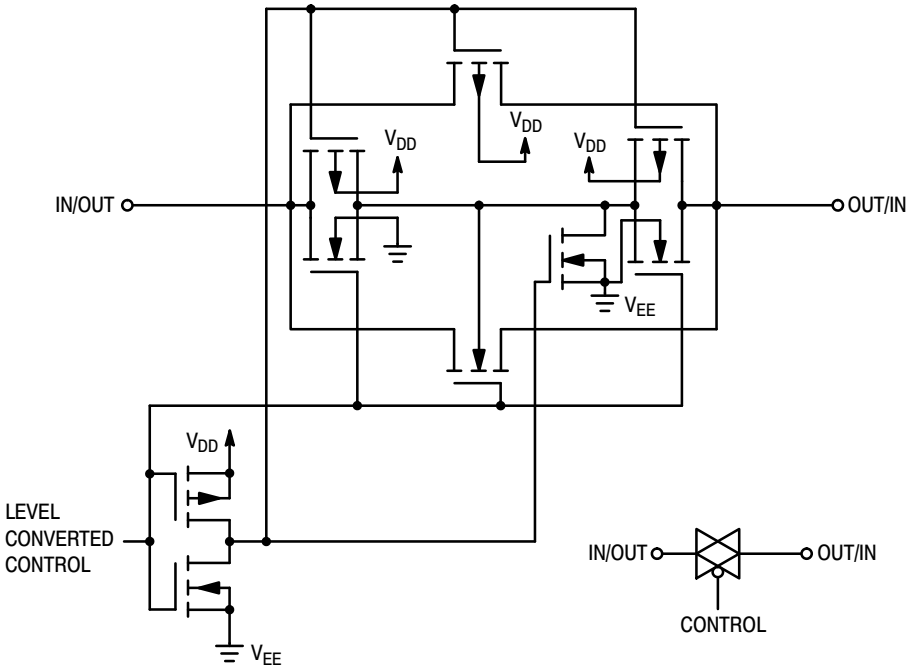

Figure 1. Switch Circuit Schematic

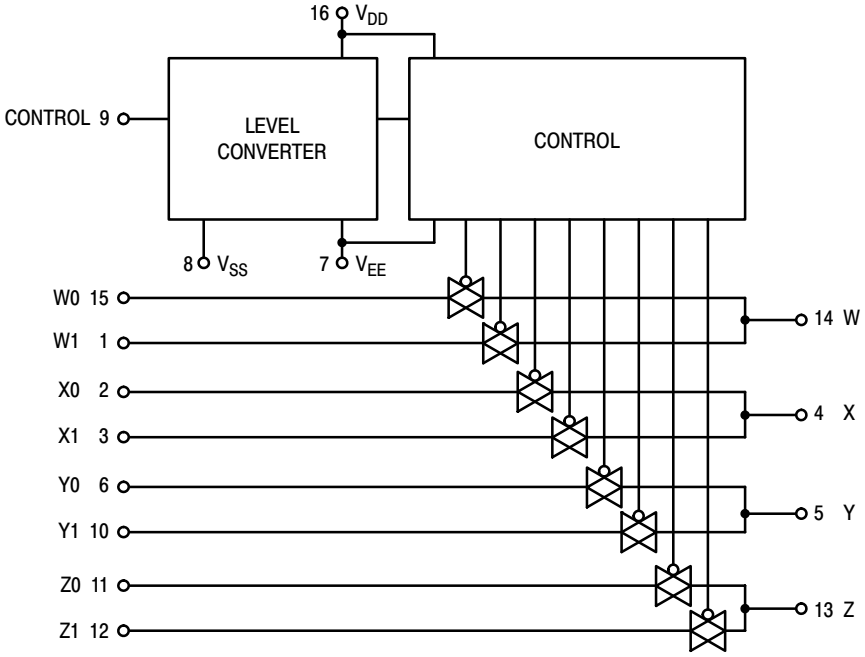

Figure 2. MC14551B Functional Diagram

Share Feedback
Your Opinion Matters

TEST CIRCUITS

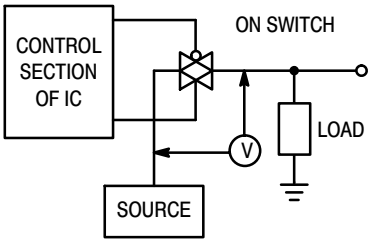

Figure 3. ΔV Across Switch

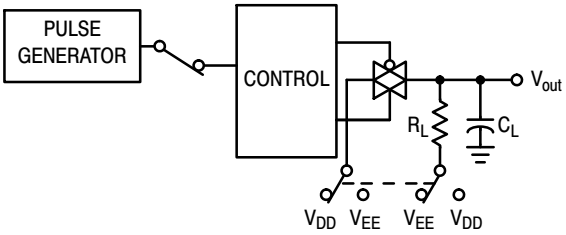

Figure 4. Propagation Delay Times, Control to Output

Control input used to turn ON or OFF the switch under test.

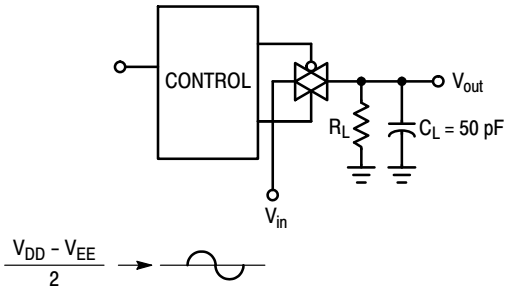

Figure 5. Bandwidth and Off-Channel Feedthrough Attenuation

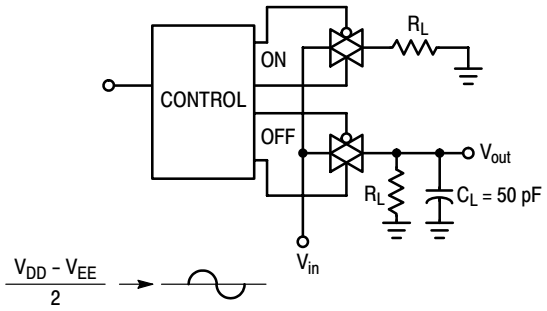

Figure 6. Channel Separation (Adjacent Channels Used for Setup)

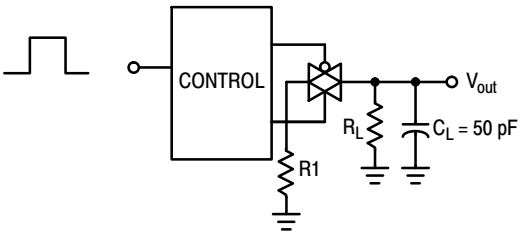

Figure 7. Crosstalk, Control Input to Common O/I

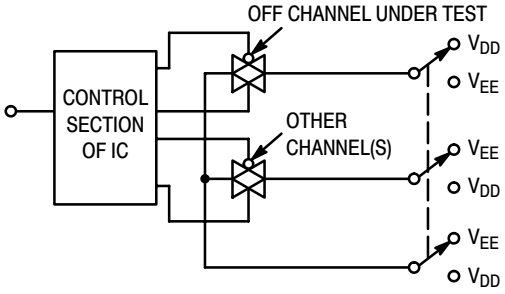

Figure 8. Off Channel Leakage

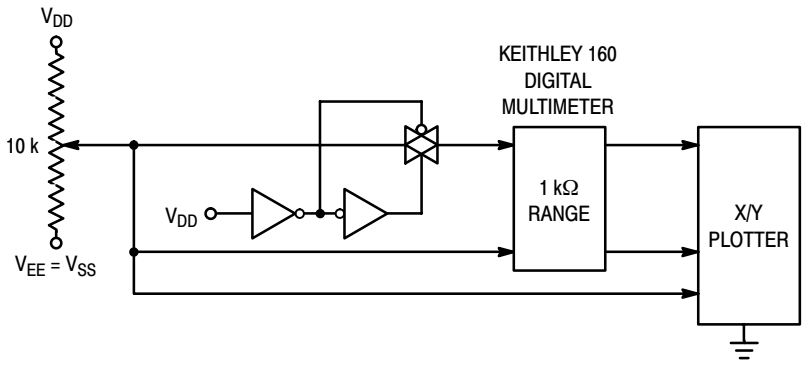

Figure 9. Channel Resistance (R_{ON}) Test Circuit

Share Feedback
Your Opinion Matters

TYPICAL RESISTANCE CHARACTERISTICS

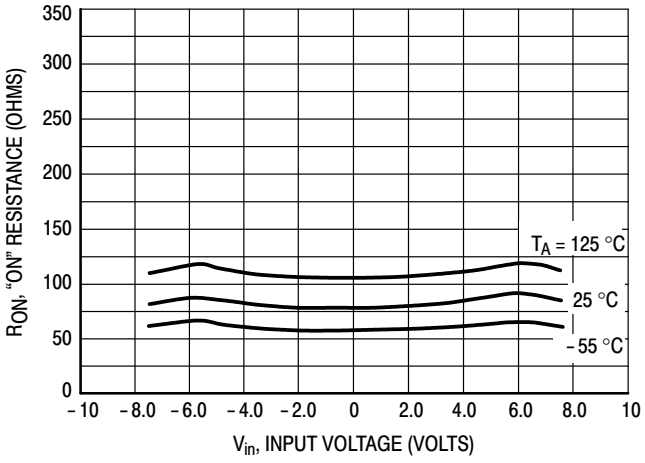

Figure 10. V_{DD} @ 7.5 V, V_{EE} @ − 7.5 V

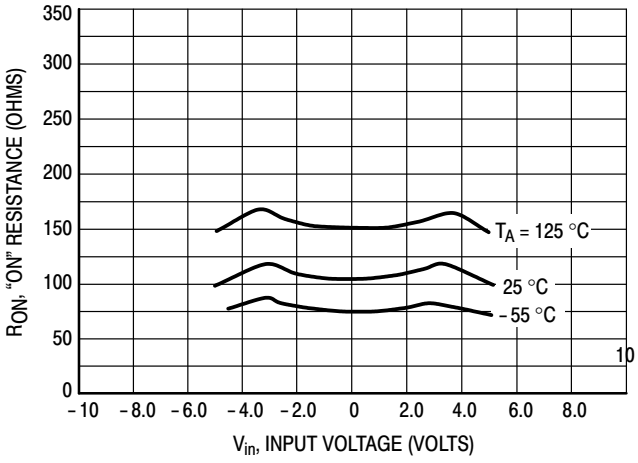

Figure 11. V_{DD} @ 5.0 V, V_{EE} @ − 5.0 V

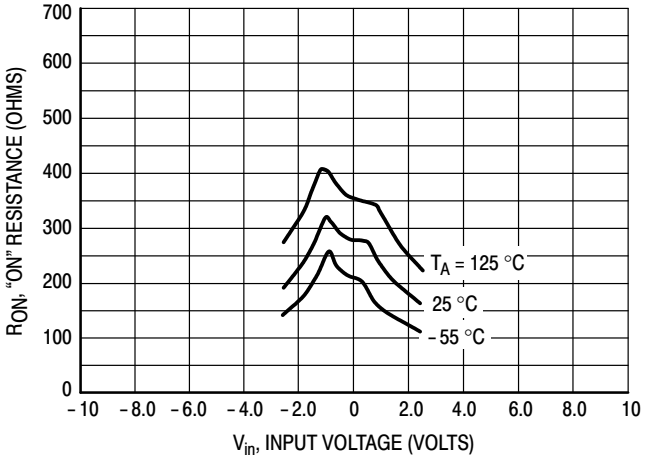

Figure 12. V_{DD} @ 2.5 V, V_{EE} @ − 2.5 V

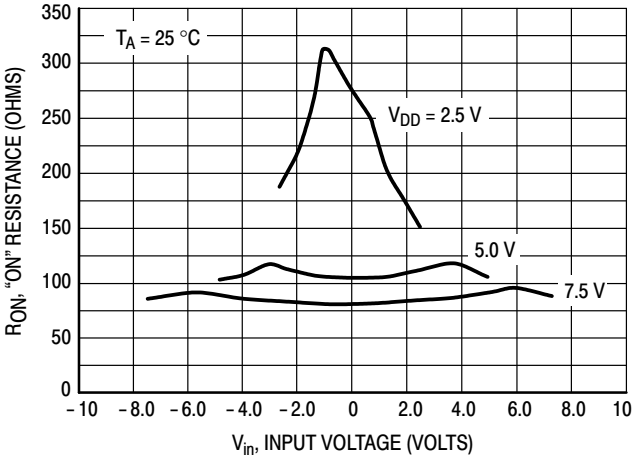

Figure 13. Comparison at 25 °C, V_{DD} @ − V_{EE}

Share Feedback
Your Opinion Matters

APPLICATIONS INFORMATION

Figure A illustrates use of the on-chip level converter detailed in Figure 2. The 0-to-5.0 V Digital Control signal is used to directly control a 9 V_{p-p} analog signal.

The digital control logic levels are determined by V_{DD} and V_{SS}. The V_{DD} voltage is the logic high voltage; the V_{SS} voltage is logic low. For the example, V_{DD} = + 5.0 V = logic high at the control inputs; V_{SS} = GND = 0 V = logic low.

The maximum analog signal level is determined by V_{DD} and V_{EE}. The V_{DD} voltage determines the maximum recommended peak above V_{SS}. The V_{EE} voltage determines the maximum swing below V_{SS}. For the example, $V_{DD} - V_{SS}$ = 5.0 V maximum swing above V_{SS}; $V_{SS} - V_{EE}$ = 5.0 V maximum swing below V_{SS}. The example shows a ± 4.5 V signal which allows a 1/2 V margin at each peak. If voltage transients above V_{DD} and/or below V_{EE} are anticipated on the analog channels, external diodes (D_x) are recommended as shown in Figure B. These diodes should be small signal types able to absorb the maximum anticipated current surges during clipping.

The absolute maximum potential difference between V_{DD} and V_{EE} is 18 V. Most parameters are specified up to 15 V which is the recommended maximum difference between V_{DD} and V_{EE}.

Balanced supplies are not required. However, V_{SS} must be greater than or equal to V_{EE}. For example, V_{DD} = + 10 V, V_{SS} = + 5.0 V, and V_{EE} = −3.0 V is acceptable. See the table below.

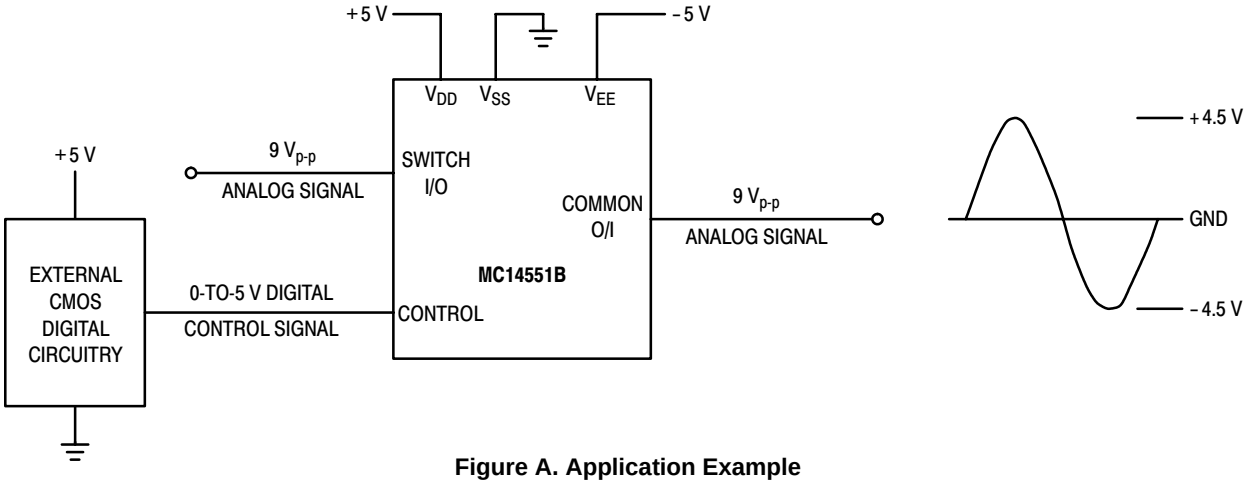

Figure A. Application Example

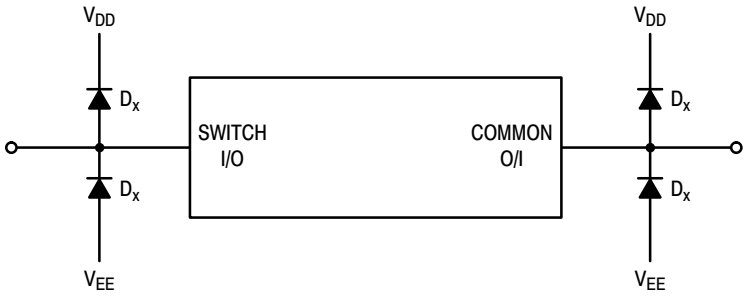

Figure B. External Schottky or Germanium Clipping Diodes

POSSIBLE SUPPLY CONNECTIONS

V_{DD} In Volts	V_{SS} In Volts	V_{EE} In Volts	Control Inputs Logic High/Logic Low In Volts	Maximum Analog Signal Range In Volts
+ 8	0	−8	+ 8/0	+ 8 to −8 = 16 V_{p-p}
+ 5	0	−12	+ 5/0	+ 5 to −12 = 17 V_{p-p}
+ 5	0	0	+ 5/0	+ 5 to 0 = 5 V_{p-p}
+ 5	0	−5	+ 5/0	+ 5 to −5 = 10 V_{p-p}
+ 10		−5	+ 10/ + 5	+ 10 to −5 = 15 V_{p-p}

Share Feedback
Your Opinion Matters

REVISION HISTORY

Revision	Description of Changes	Date
10	Rebranded the Data Sheet to **onsemi** format.	10/7/2025

This document has undergone updates prior to the inclusion of this revision history table. The changes tracked here only reflect updates made on the noted approval dates.

Share Feedback
Your Opinion Matters



SOIC−16 9.90x3.90x1.37 1.27P
CASE 751B
ISSUE M

DATE 18 OCT 2024

NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018.
2. DIMENSION IN MILLIMETERS. ANGLE IN DEGREES.
3. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15mm PER SIDE.
5. DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127mm TOTAL IN EXCESS OF THE b DIMENSION AT MAXIMUM MATERIAL CONDITION.

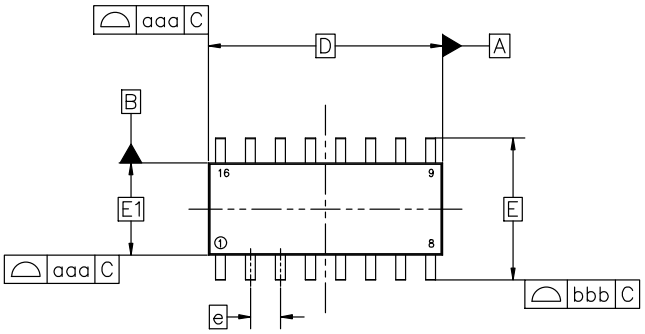

TOP VIEW

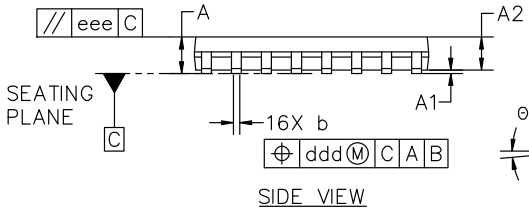

SIDE VIEW

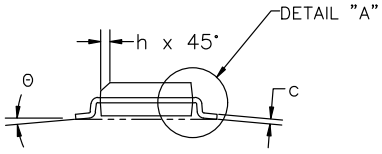

END VIEW

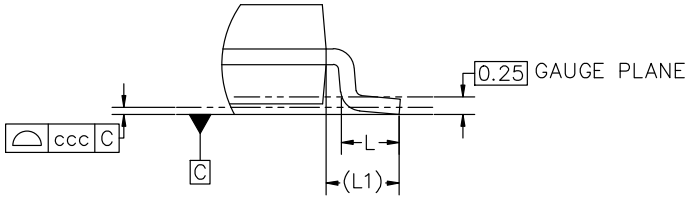

DETAIL "A"
Scale 3:1

MILLIMETERS			
DIM	MIN	NOM	MAX
A	1.35	1.55	1.75
A1	0.10	0.18	0.25
A2	1.25	1.37	1.50
b	0.35	0.42	0.49
c	0.19	0.22	0.25
D	9.90 BSC		
E	6.00 BSC		
E1	3.90 BSC		
e	1.27 BSC		
h	0.25	−−−	0.50
L	0.40	0.83	1.25
L1	1.05 REF		
Θ	0°	−−−	7°
TOLERANCE OF FORM AND POSITION			
aaa	0.10		
bbb	0.20		
ccc	0.10		
ddd	0.25		
eee	0.10		

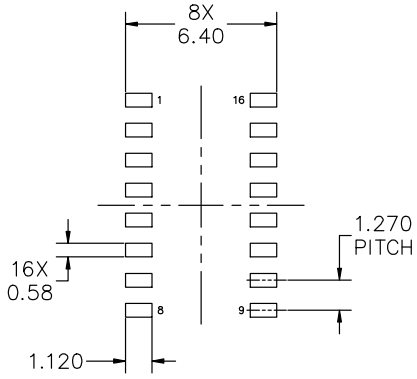

RECOMMENDED MOUNTING FOOTPRINT

*FOR ADDITIONAL INFORMATION ON OUR PB−FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE onsemi SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D

DOCUMENT NUMBER:	**98ASB42566B**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	**SOIC−16 9.90X3.90X1.37 1.27P**		**PAGE 1 OF 2**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

SOIC−16 9.90x3.90x1.37 1.27P
CASE 751B
ISSUE M

DATE 18 OCT 2024

GENERIC MARKING DIAGRAM*



XXXXX = Specific Device Code
A = Assembly Location
WL = Wafer Lot
Y = Year
WW = Work Week
G = Pb−Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “▪”, may or may not be present. Some products may not follow the Generic Marking.

STYLE 1:

PIN	
1.	COLLECTOR
2.	BASE
3.	EMITTER
4.	NO CONNECTION
5.	EMITTER
6.	BASE
7.	COLLECTOR
8.	COLLECTOR
9.	BASE
10.	EMITTER
11.	NO CONNECTION
12.	EMITTER
13.	BASE
14.	COLLECTOR
15.	EMITTER
16.	COLLECTOR

STYLE 2:

PIN	
1.	CATHODE
2.	ANODE
3.	NO CONNECTION
4.	CATHODE
5.	CATHODE
6.	NO CONNECTION
7.	ANODE
8.	CATHODE
9.	CATHODE
10.	ANODE
11.	NO CONNECTION
12.	CATHODE
13.	CATHODE
14.	NO CONNECTION
15.	ANODE
16.	CATHODE

STYLE 3:

PIN	
1.	COLLECTOR, DYE #1
2.	BASE, #1
3.	EMITTER, #1
4.	COLLECTOR, #1
5.	COLLECTOR, #2
6.	BASE, #2
7.	EMITTER, #2
8.	COLLECTOR, #2
9.	COLLECTOR, #3
10.	BASE, #3
11.	EMITTER, #3
12.	COLLECTOR, #3
13.	COLLECTOR, #4
14.	BASE, #4
15.	EMITTER, #4
16.	COLLECTOR, #4

STYLE 4:

PIN	
1.	COLLECTOR, DYE #1
2.	COLLECTOR, #1
3.	COLLECTOR, #2
4.	COLLECTOR, #2
5.	COLLECTOR, #3
6.	COLLECTOR, #3
7.	COLLECTOR, #4
8.	COLLECTOR, #4
9.	BASE, #4
10.	EMITTER, #4
11.	BASE, #3
12.	EMITTER, #3
13.	BASE, #2
14.	EMITTER, #2
15.	BASE, #1
16.	EMITTER, #1

STYLE 5:

PIN	
1.	DRAIN, DYE #1
2.	DRAIN, #1
3.	DRAIN, #2
4.	DRAIN, #2
5.	DRAIN, #3
6.	DRAIN, #3
7.	DRAIN, #4
8.	DRAIN, #4
9.	GATE, #4
10.	SOURCE, #4
11.	GATE, #3
12.	SOURCE, #3
13.	GATE, #2
14.	SOURCE, #2
15.	GATE, #1
16.	SOURCE, #1

STYLE 6:

PIN	
1.	CATHODE
2.	CATHODE
3.	CATHODE
4.	CATHODE
5.	CATHODE
6.	CATHODE
7.	CATHODE
8.	CATHODE
9.	ANODE
10.	ANODE
11.	ANODE
12.	ANODE
13.	ANODE
14.	ANODE
15.	ANODE
16.	ANODE

STYLE 7:

PIN	
1.	SOURCE N-CH
2.	COMMON DRAIN (OUTPUT)
3.	COMMON DRAIN (OUTPUT)
4.	GATE P-CH
5.	COMMON DRAIN (OUTPUT)
6.	COMMON DRAIN (OUTPUT)
7.	COMMON DRAIN (OUTPUT)
8.	SOURCE P-CH
9.	SOURCE P-CH
10.	COMMON DRAIN (OUTPUT)
11.	COMMON DRAIN (OUTPUT)
12.	COMMON DRAIN (OUTPUT)
13.	GATE N-CH
14.	COMMON DRAIN (OUTPUT)
15.	COMMON DRAIN (OUTPUT)
16.	SOURCE N-CH

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2019

onsemi, ONSEMI , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales