

NCD57252GEVB

PIN Description

Table 1. EVALUATION BOARD PIN DESCRIPTION

Pin Name	Pin Number	Description
INA	17, 24	Channel A input signal
INB	15, 26	Channel B input signal
DIS	19, 22	Disable signal input (active High)
+5V	21, 20	Driver primary side power supply
VCC	23, 18	DC/DC sources alternative power supply (optional)
GND	25, 16	Primary side power/signal ground
VCCA	39, 40	A channel positive power supply
GNDA	37, 38	A channel Ground
VEEA	35, 36	A channel negative power supply
E-A	33, 34	Emitter connection of A channel – connected to GNDA
G-A	31, 32	Gate connector of A channel
VCCB	1, 2	B channel positive power supply
GNDB	3, 4	B channel Ground
VEEB	5, 6	B channel negative power supply
E-B	7, 8	Emitter connection of B channel – connected to GNDB
G-B	9, 10	Gate connection of B channel

ON-BOARD Jumpers Functional Table

Table 2. NCD57252 JUMPERS FUNCTIONAL TABLE

Jumper Name	Setup	Description
VIN SET	OPEN	When using external power supplies for VCCA / VCCB Power supplies need to be connected to the VCCA, VCCB pins on P1
	+5V	When using DC-DC converter powered by the same voltage as the primary side of the driver VCC pin on P1 can be unconnected
	VCC	When using DC-DC converter powered by different voltage as the primary side of the driver Power supply for DC-DC converter need to be connected to the VCC pin on P1
ANB SET	ON	When complementary output signals need to be generated from a single input signal
	OFF	Output signals are in phase with input signals
DT SET	DT	Dead time and interlocking logic between INA and INB is defined by the value of the external resistor (R7)
	OFF	Interlocking logic disabled, no dead time applied
	FLOAT	Dead time and interlocking logic between INA and INB are set internally to the minimum value (see the datasheet)
B-IN SET	INA	When ANB SET is ON – both inputs are connected together
	INB	When ANB SET is OFF

NCD57252GEVB

Electrical Specification

Table 3. NCD57252 ELECTRICAL SPECIFICATION

Description		Min	Typ	Max	Unit
VCCA/VCCB	Output positive bias power supply (VCC–VEE max)	13	–	36	V
VEE	Output negative bias power supply	0	–	–20	V
GND _A / GND _B	Output bias ground – connected to the IGBT emitter	–	–	–	
+5V	Input bias power supply (VDDI)	3.3	–	22	V
GND	Input bias signal and power ground	–	–	–	
DIS	Disable signal input	0	–	VDDI	V
VCC	DC–DC sources optional power supply (depended on DC–DC)	0	–	–	V
T _J	Operating junction temperature range	–40	–	125	°C

NCD57252GEVB

FUNCTIONAL DESCRIPTION

Power Supply (VCC, +5V, VCCA, VCCB)

NCD57252 is designed to support unipolar power supply on both individual channels.

The evaluation driver board supports two types of output side power supply:

- On board DC–DC converter
 - ◆ Powered by a common source as the input side of NCD57252
 - ◆ Powered from external power pin VCC

- External power supply

The evaluation driver board is designed to support bipolar power supply, this is achieved by creating a virtual ground connected to the IGBT emitter. If bipolar power supply is not required, VEEA / VEEB pin should be connected to the GNDA / GNDB

For more detailed settings see the Table 2.

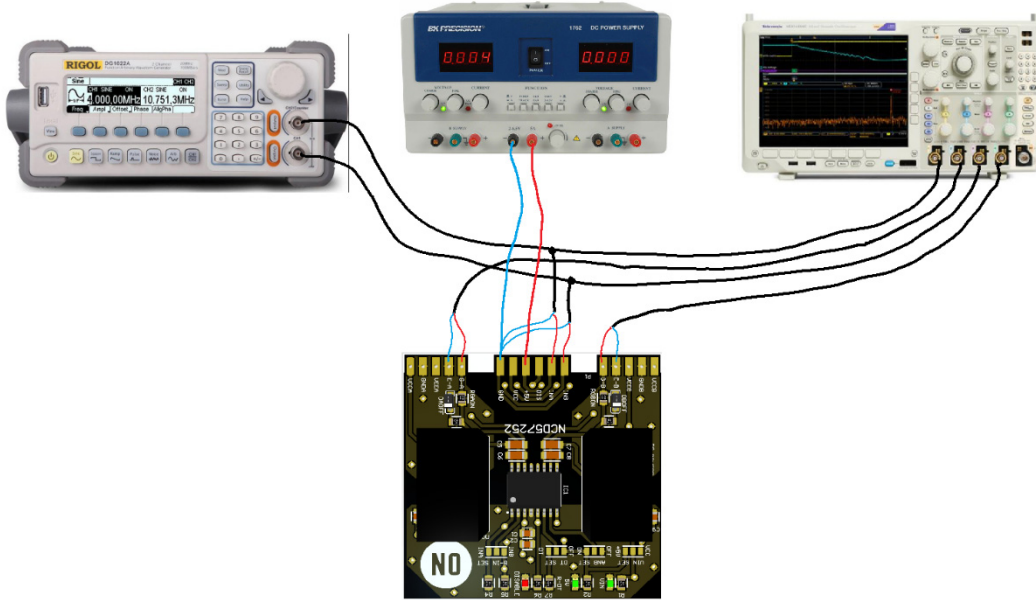


Figure 2. On Board DC–DC Power Converter Powered by a Common Power Source as the Input Side of the Driver

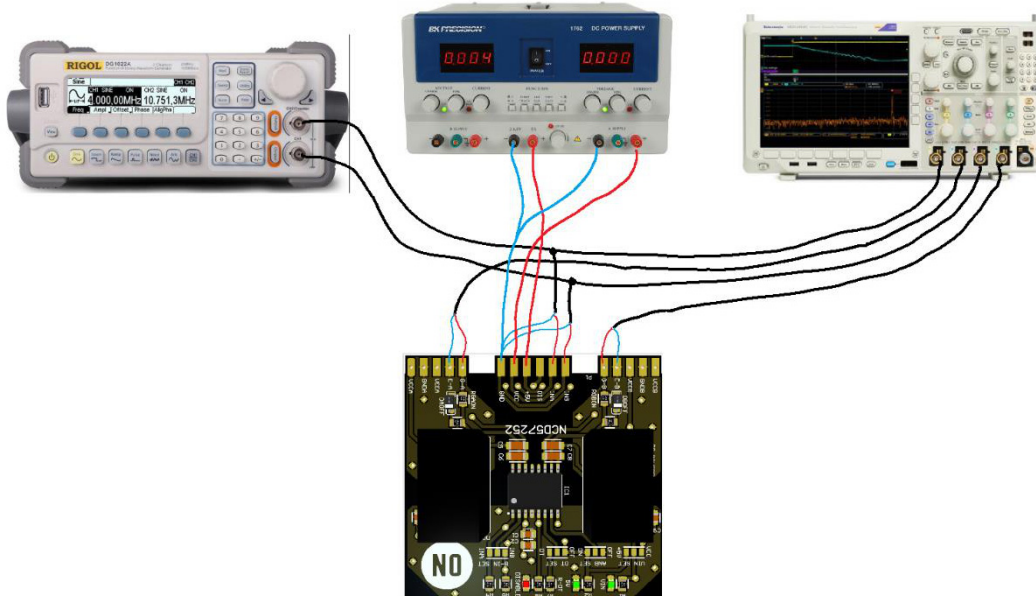


Figure 3. On Board DC–DC Power Converter Powered by a Different Power Source from the VCC Pin

NCD57252GEVB

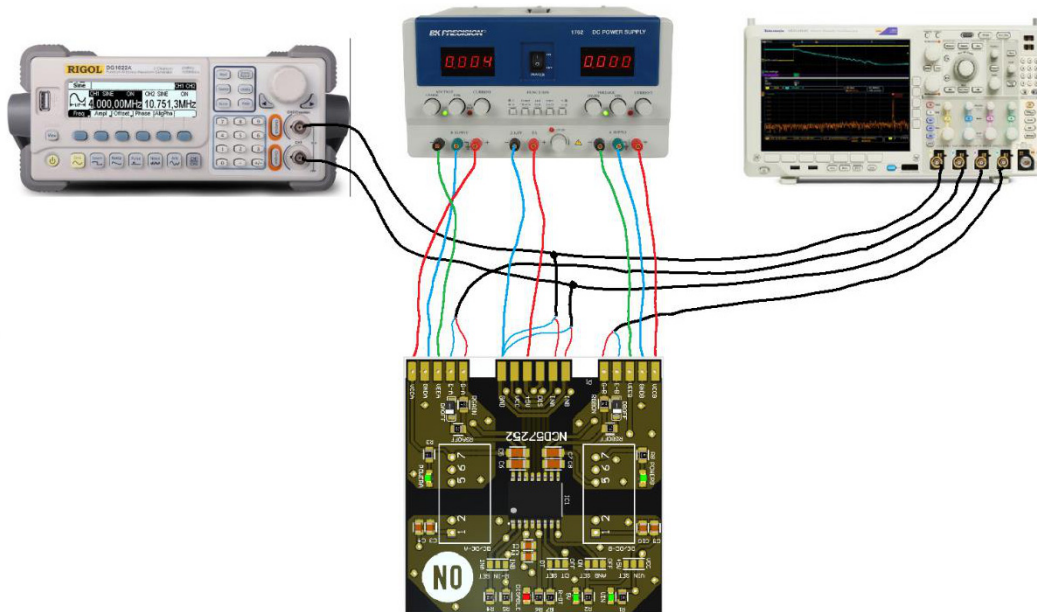


Figure 4. External Power Supply (No On Board DC-DC Converters)

Signal Inputs (INA, INB)

To prevent output pulse trimming, NCD57252 is equipped by resettable input functionality.

This function is active when the UVLO or the DISABLE function is detected.

OUTx will stay LOW until rising edge is detected on the INx.

Signal Inputs Setup (ANB SET, DT SET)

Complementary Output Setup (ANB)

This function provides complementary signal output from one PWM input signal on INA.

- Set ANB SET jumper to ON to activate the function, B-IN jumper should be set to the INA to ensure proper input signal rising edge reset after UVLO conditions have disappeared or DISABLE has been deactivated.

- ANB SET should be set to OFF when G-A and G-B are controlled individually by INA and INB (along with DISABLE and DT).

Deadtime (DT)

The function provides complementary output signals with defined deadtime based on the value of the external resistor R7 (connected between DT pin and GND). The deadtime can be estimated as $t_{DT} \text{ (ns)} \approx 10 \times R_{DT} \text{ (k}\Omega\text{)}$.

If minimum dead time is required, DT SET should remain float (see Table 2)

- If DT SET is set to OFF, the deadtime control is disabled. Outputs are controlled by inputs with respect to other settings such as ANB SET, IN-B.
- If DT SET is set to DT, the deadtime control is active. Outputs are controlled by inputs with added deadtime.

NCD57252GEVB

TEST SPECIFICATION

This section provides details how to configure the NCD57252 Evaluation board. Basic laboratory equipment will be required to perform the tests.

Equipment

- Power supplies
 - ◆ 3pcs of DC power supplies providing minimally 25V/1A. (or 1 DC power supply + 2pcs of DC/DC converters).
- Function generator
 - ◆ Two channel functional generator providing the required testing frequency.
- Oscilloscope
 - ◆ Oscilloscope 2 channel (4 channel optional)
 - Passive probes

Bench Test Setup

The bench test setup shows the equipment connections. Use basic setup procedure as a reference:

- Make sure the power supplies & outputs of signal generators are powered off / disabled
- Connect function generator to the INA and INB signal inputs and GND
- Connect power supply positive lead to the +5V
- Connect power supply negative lead to the GND
- Connect power supplies positive lead to the VCCA / VCCB
- Connect power supply negative lead to the VEEA / VEEB
- (VEEA/VEEB shorted to the GNDA/GNDB if not used)
- Connect power supply ground lead to the GNDA / GNDB
- Connect oscilloscope probes to G–A, G–B output pins

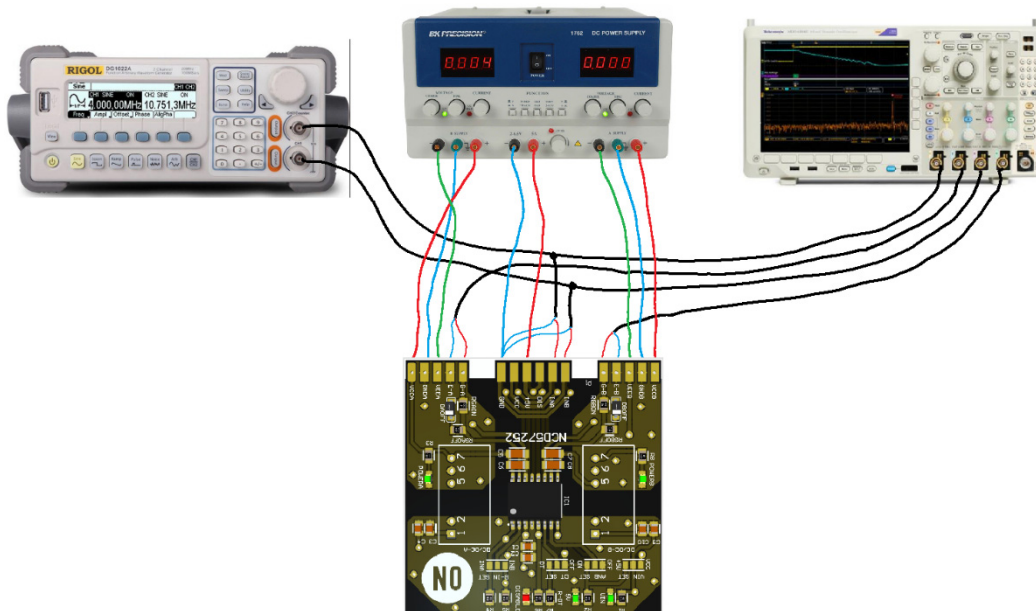


Figure 5. Test Setup Diagram

Power Up

1. Before the power-up, verify the correct connection of all signals and power leads
2. Enable power supply. Current consumption depends on the chosen solution of the secondary side power supply. When 5 V to +20 V/-5 V DC-DC converters are used, the current consumption can be up to 300 mA
3. Enable function generator outputs
4. Check the signals at each outputs

Power Down

1. Disable functional generator outputs
2. Disable power supply
3. Disconnect equipment


NCD57252GEVB

Test 1 – Typical Performance Waveforms – Propagation Delay

To set the board, use this setup as a reference.

Make sure the power supplies & outputs of signal generators are powered off / disabled channel


1. VIN SET
 - a. For powering outputs by using external power supplies – open jumper
 - b. For using 5V DC-DC converter – Set jumper to 5 V
 - c. For using different input voltage DC-DC converter – Set jumper to VCC
 - i. External power supplies with appropriate voltage need to be connected to VCC pin
2. ANB SET – Set to OFF
3. DT SET – Set to OFF
4. B-IN SET – Set to INB
5. POWER UP the setup

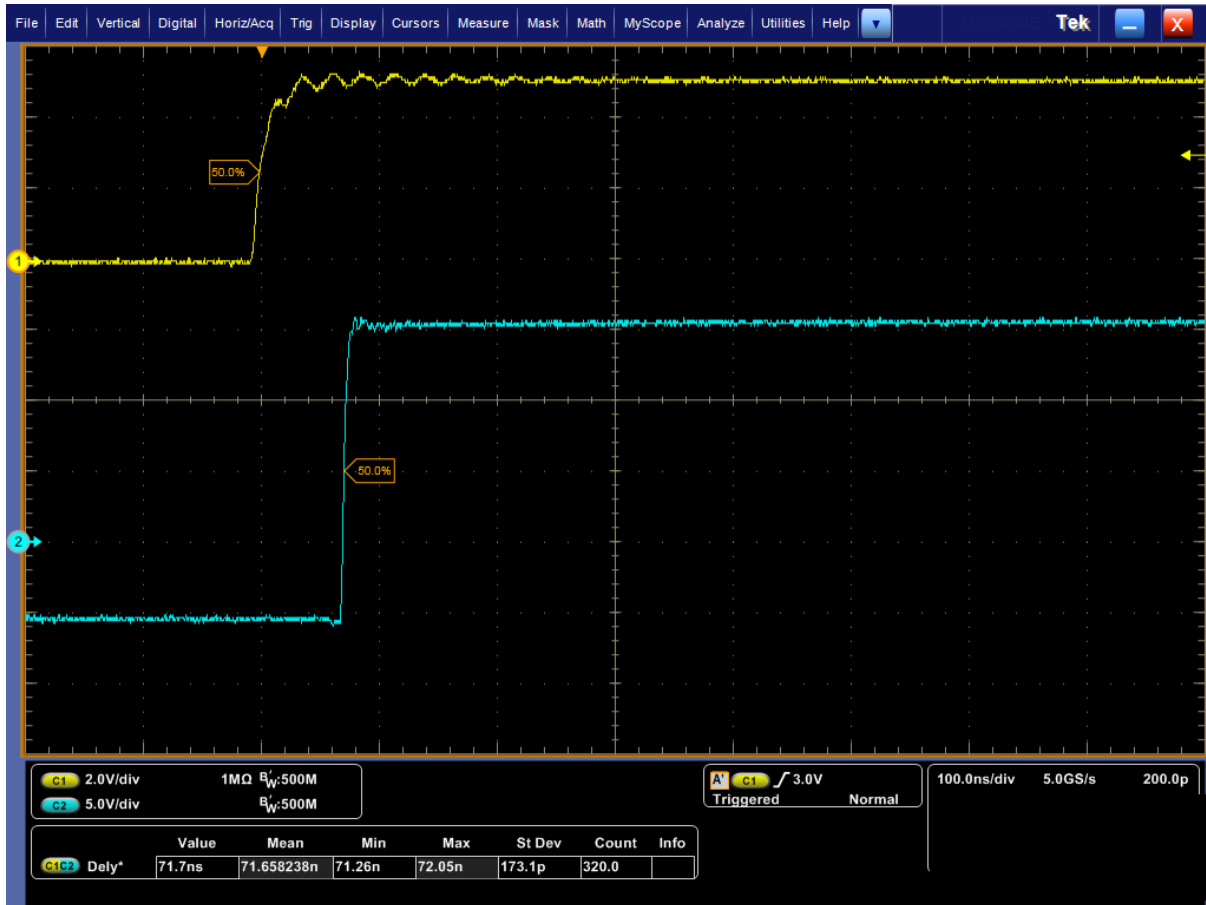

(Legend: C1 – Input A (INA), C2 – Output A (G-A), C3 – Input B (INB), C4 – Output B (G-B))

Figure 6. INPUT and OUTPUT Rise Propagation Delay Waveforms

NCD57252GEVB

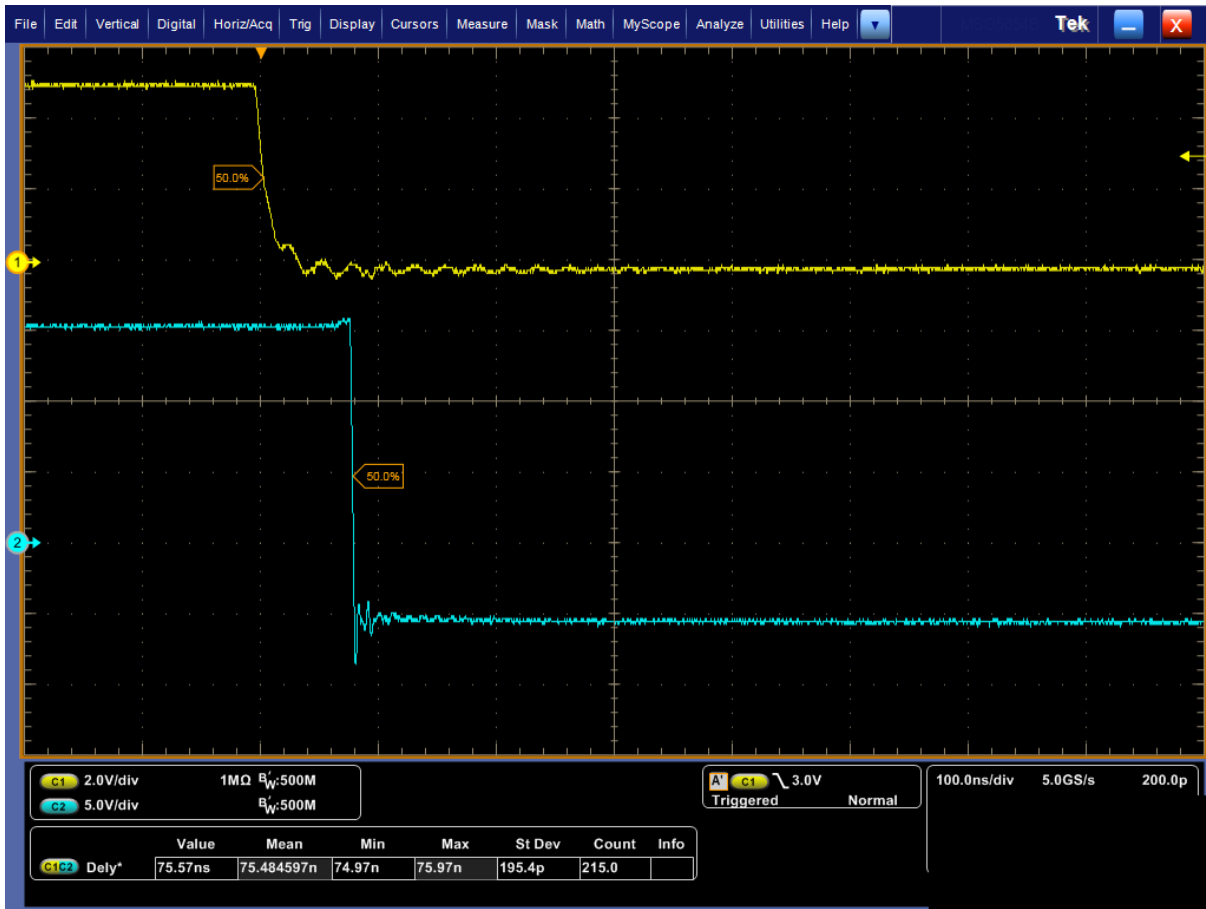

(Legend: C1 – Input A (INA), C2 – Output A (G-A), C3 – Input B (INB), C4 – Output B (G-B))

Figure 7. INPUT and OUTPUT Fall Propagation Delay Waveforms

NCD57252GEVB


Test 2 – Typical Performance Waveforms – Independent 2 Channels Driver

The NCD57252 can work as 2 independent channel driver.

To set the board as 2 independent channel driver, use this setup as a reference.

Make sure the power supplies & outputs of signal generators are powered off/ disabled channel

1. VIN SET
 - a. For powering outputs by using external power supplies – open jumper
 - b. For using 5 V DC–DC converter – Set jumper to 5 V
 - c. For using different input voltage DC–DC converter – Set jumper to VCC
 - i. External power supplies with appropriate voltage need to be connected to VCC pin
2. ANB SET – Set to OFF
3. DT SET – Set to OFF
4. B–IN SET – Set to INB
5. POWER UP the setup

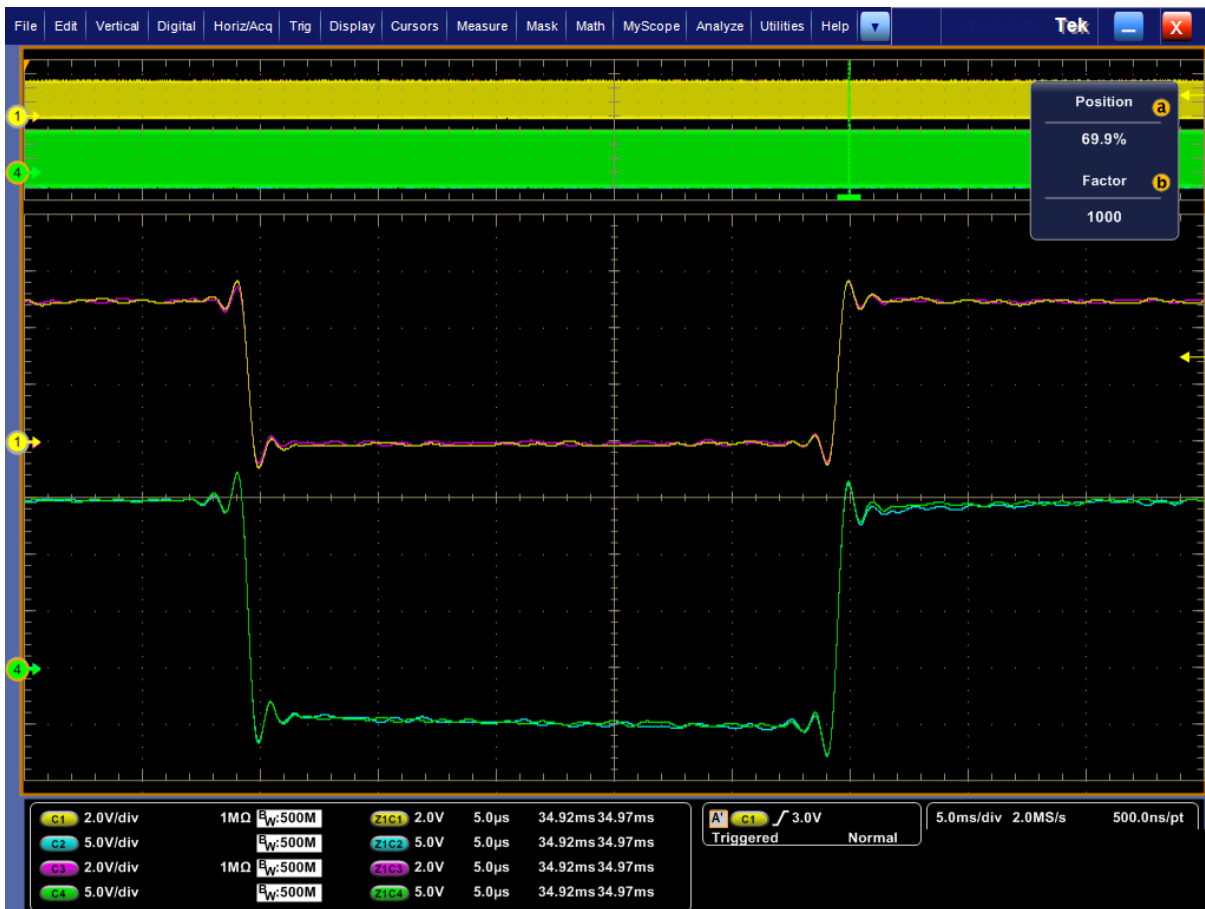

(Legend: C1 – Input A (INA), C2 – Output A (G–A), C3 – Input B (INB), C4 – Output B (G–B))

(Input signals from the external signal generator are in phase)

Figure 8. INPUT and OUTPUT Signals

NCD57252GEVB



(Legend: C1 – Input A (INA), C2 – Output A (G–A), C3 – Input B (INB), C4 – Output B (G–B))

(Input signals from the external signal generator are complementary)

Figure 9. INPUT and OUTPUT Signals


NCD57252GEVB

Test 3 – Typical Performance Waveforms –2 Channels Complementary Driver without Added Dead Time

The NCD57252 can work as 2 channel complementary driver with single channel input without affecting the dead time. To set the board as 2 channel driver, use this setup as a reference.

Make sure the power supplies & outputs of signal generators are powered off / disabled channel


1. VIN SET
 - a. For powering outputs by using external power supplies – open jumper
 - b. For using 5 V DC–DC converter – Set jumper to 5 V
 - c. For using different input voltage DC–DC converter – Set jumper to VCC
 - i. External power supplies with appropriate voltage need to be connected to VCC pin
2. ANB SET – Set to ON
3. DT SET – Set to OFF
4. B–IN SET – Set to INA
5. POWER UP the setup

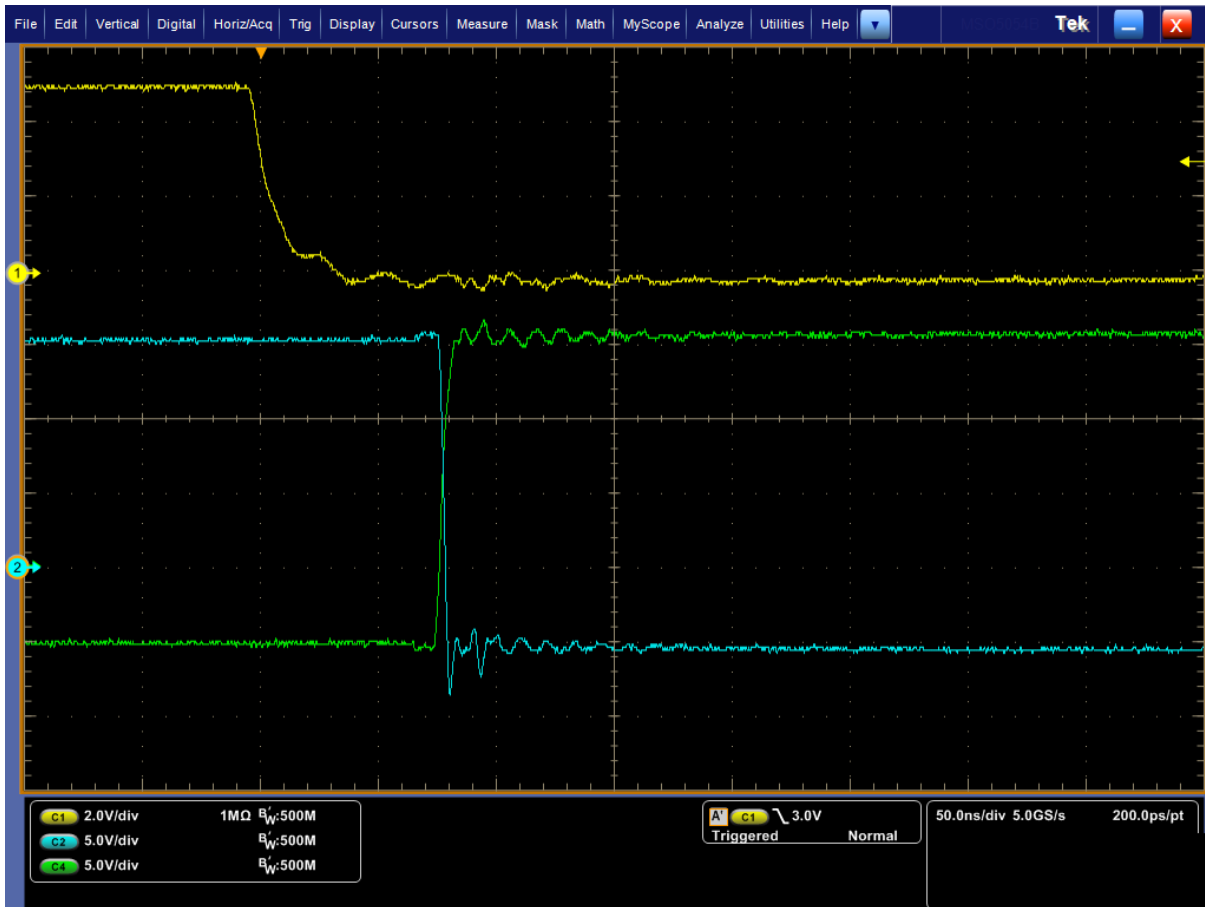

(Legend: C1 – Input A (INA), C2 – Output A (G–A), C3 – Input B (INB), C4 – Output B (G–B))

Figure 10. INPUT and OUTPUT Signals

NCD57252GEVB

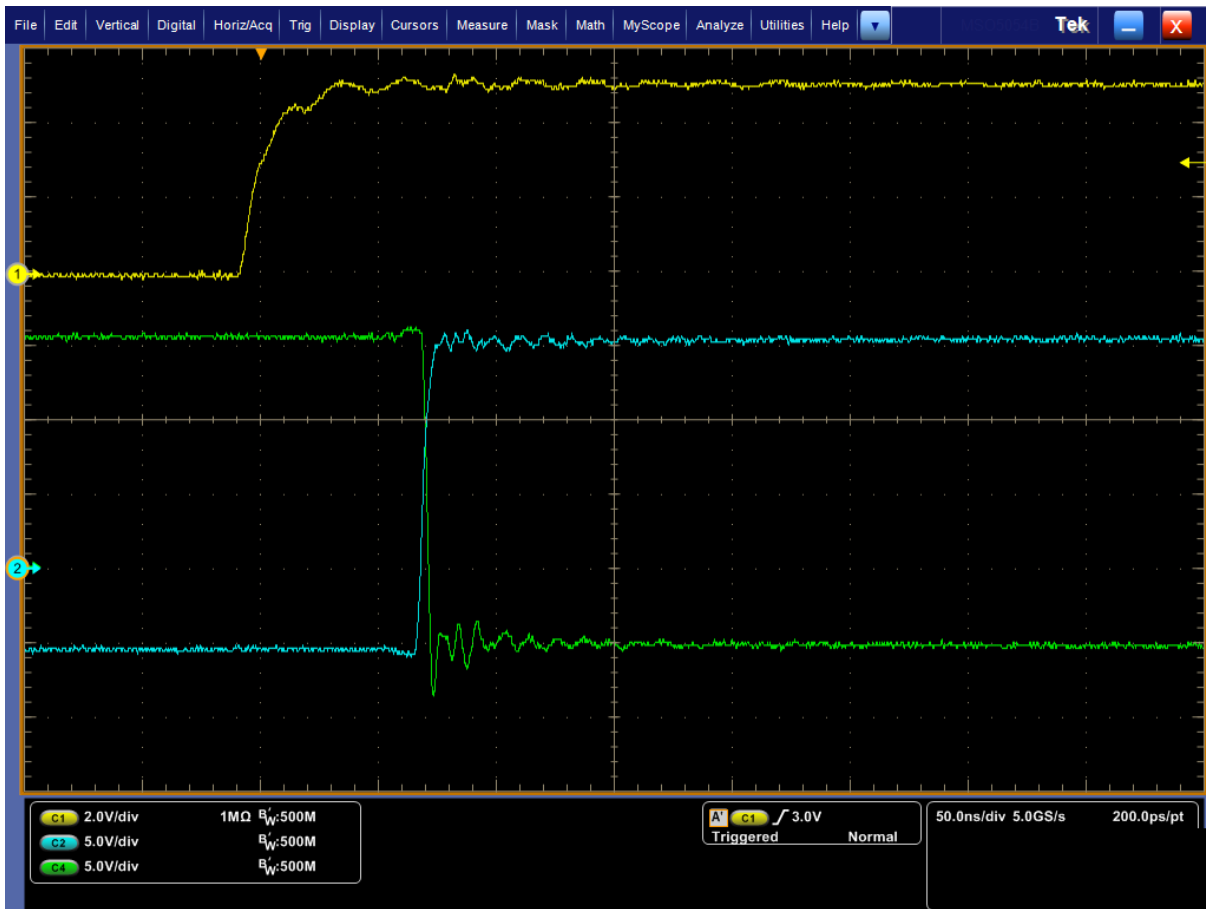

(Legend: C1 – Input A (INA), C2 – Output A (G-A), C3 – Input B (INB), C4 – Output B (G-B))

Figure 11. INPUT and OUTPUT Signals


NCD57252GEVB

Test 4 – Typical Performance Waveforms –2 Channels Complementary Driver with Adjustable Dead Time

The NCD57252 can work as 2 channel complementary driver with single channel input with adjustable dead time. To set the board as 2 channel driver, use this setup as a reference.

Make sure the power supplies & outputs of signal generators are powered off / disabled channel


1. VIN SET
 - a. For powering outputs by using external power supplies – open jumper
 - b. For using 5 V DC–DC converter – Set jumper to 5 V
 - c. For using different input voltage DC–DC converter – Set jumper to VCC
 - i. External power supplies with appropriate voltage need to be connected to VCC pin
2. ANB SET – Set to ON
3. DT SET – Set to DT (DT value is set by R7 value, see the datasheet)
4. B–IN SET – Set to INA
5. POWER UP the setup

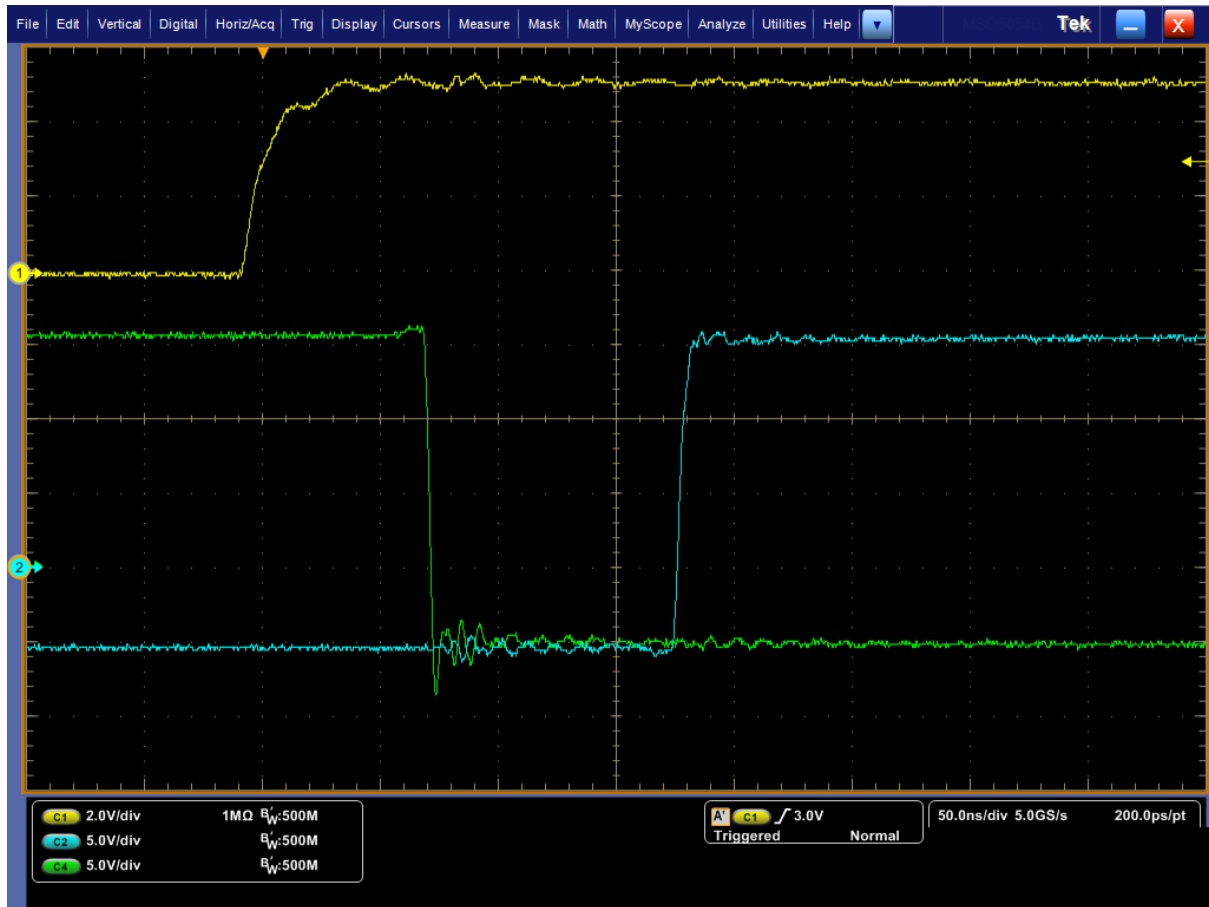

(Legend: C1 – Input A (INA), C2 – Output A (G–A), C3 – Input B (INB), C4 – Output B (G–B))

Figure 12. INPUT and OUTPUT Signals

NCD57252GEVB

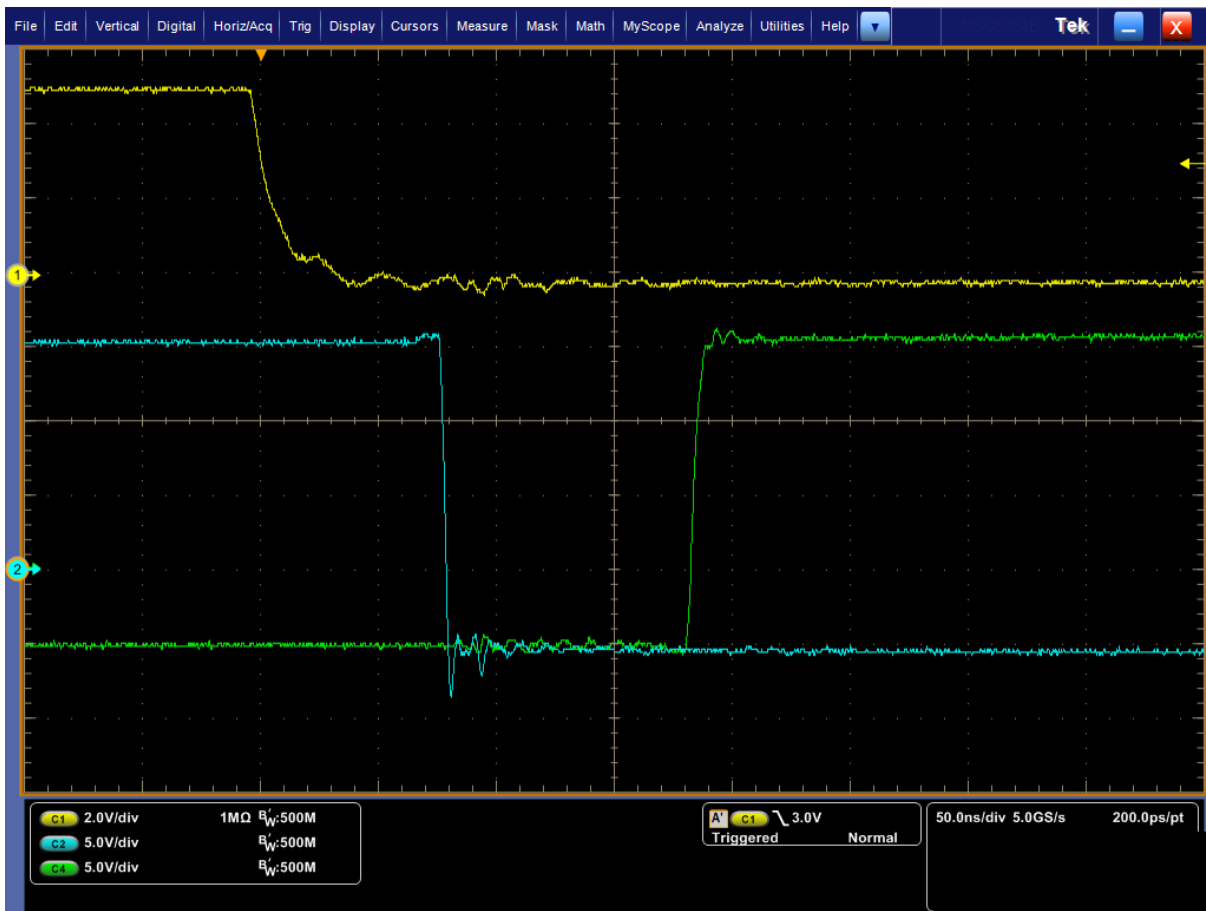

(Legend: C1 – Input A (INA), C2 – Output A (G-A), C3 – Input B (INB), C4 – Output B (G-B))

Figure 13. INPUT and OUTPUT Signals

NCD57252GEVB

Layout Diagrams

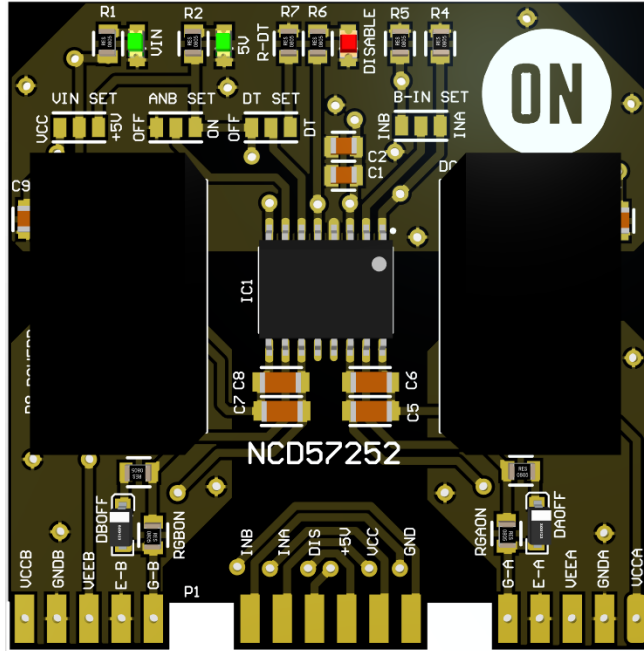


Figure 15. Assembled PCB TOP View

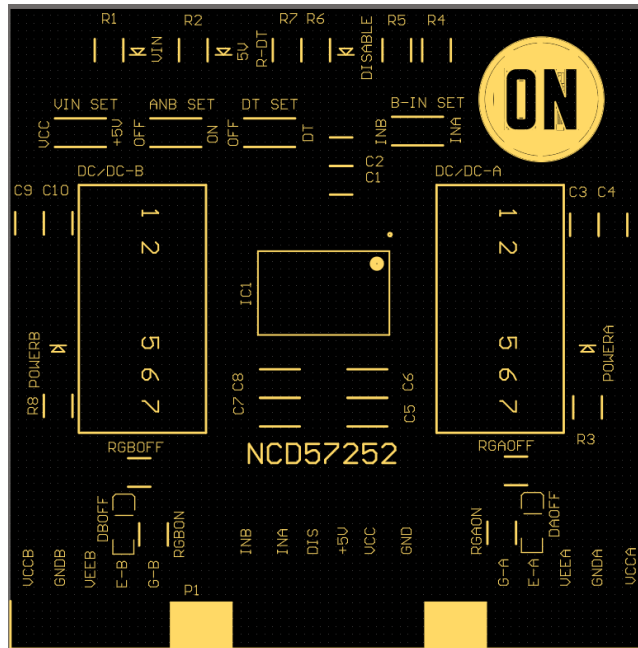


Figure 16. TOP Overlay

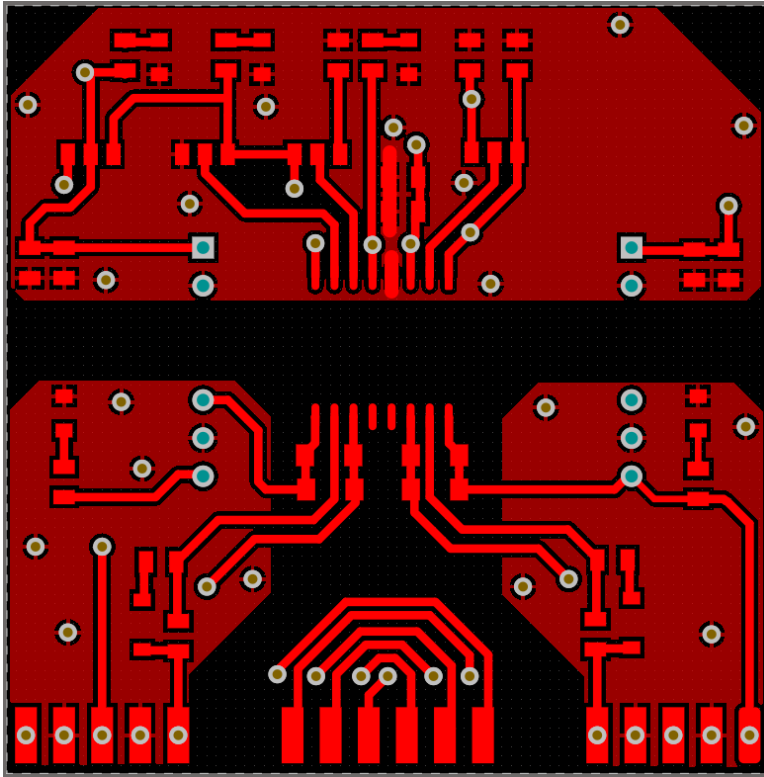


Figure 17. Top Layer

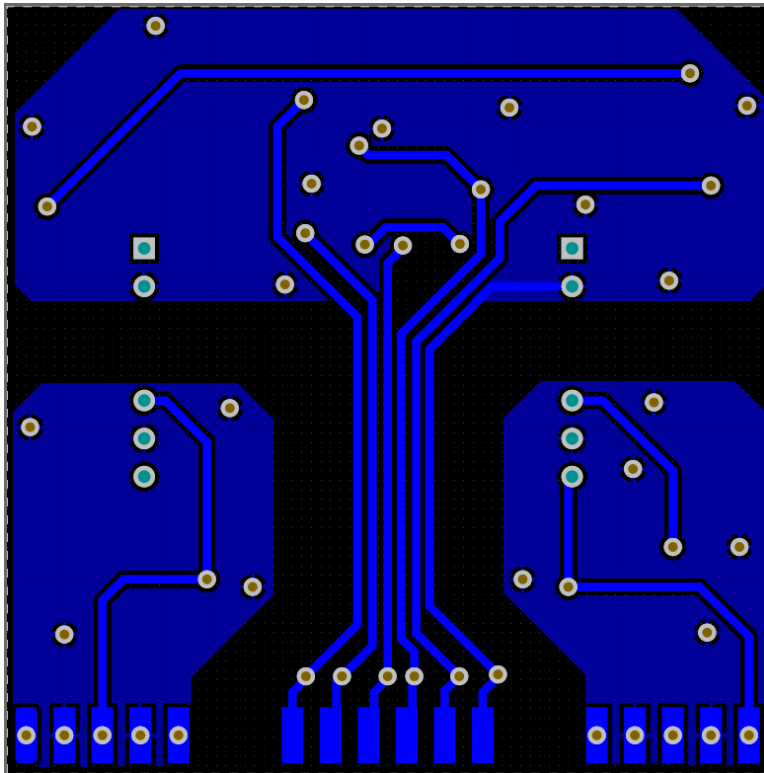


Figure 18. BOT Layer

NCD57252GEVB

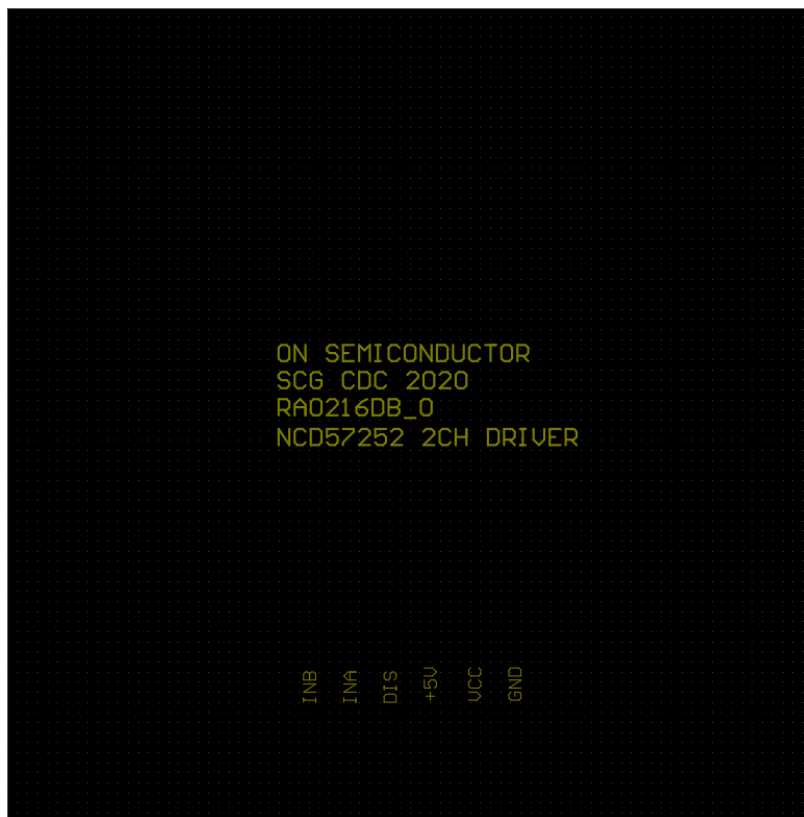


Figure 19. BOT Overlay

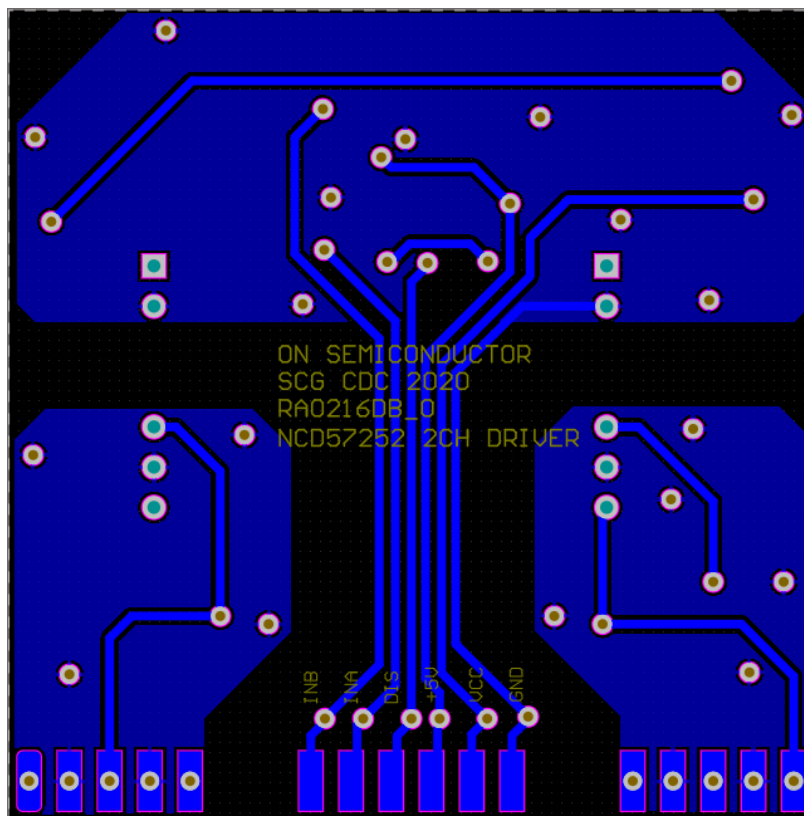


Figure 20. Assembled PCB BOT View

NCD57252GEVB

BOM

Table 4. BILL OF MATERIAL

Quantity	Assembled	Designator	Value	Description	Package	Manufacturer
1	YES	IC1	NCD57252	IGBT Driver	SOIC-16W	ON Semiconductor
2	YES	DAOFF, DBOFF	MMSD301T1G	Schottky diode 30 V	SOD-123	ON Semiconductor
4	YES	VIN, +5V, POWERA, POWERB	LED SMD	GREEN	SMD 0805	
1	YES	DISABLE	LED SMD	RED	SMD 0805	
1	YES	C1, C3, C9	100 nF / 50 V	Ceramic capacitor	0805	Kemet
1	YES	C2, C4, C10	10 μ F / 35 V	Ceramic capacitor	0805	Kemet
2	YES	C6, C8	10 μ F / 35 V	Ceramic capacitor	1206	TDK
2	YES	C5, C7	100 nF / 50 V	Ceramic capacitor	1206	Kemet
7	YES	R1, R2, R3, R4, R5, R6, R8	10 k Ω	Resistor	0805	Vishay
4	YES	RGAON, RGAOFF, RGBON, RGBOFF	10 Ω	Resistor	0805	Vishay
1	YES	R7	100 k Ω (20 k Ω - 500 k Ω)	Resistor	0805	Vishay
1	YES	P1	2x20	PIN header		
1	YES	PCB	RA0216DB_0	PCB	51x51 mm	Any
2	OPTIONAL	DC/DC-A, DC/DC-B	MGJ2D051505SC MGJ2D121505SC MGJ2D052005SC MGJ2D152015SC	DC-DC power source	10x13x20 mm	MURATA

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

The evaluation board/kit (research and development board/kit) (hereinafter the "board") is not a finished product and is not available for sale to consumers. The board is only intended for research, development, demonstration and evaluation purposes and will only be used in laboratory/development areas by persons with an engineering/technical training and familiar with the risks associated with handling electrical/mechanical components, systems and subsystems. This person assumes full responsibility/liability for proper and safe handling. Any other use, resale or redistribution for any other purpose is strictly prohibited.

THE BOARD IS PROVIDED BY ONSEMI TO YOU "AS IS" AND WITHOUT ANY REPRESENTATIONS OR WARRANTIES WHATSOEVER. WITHOUT LIMITING THE FOREGOING, ONSEMI (AND ITS LICENSORS/SUPPLIERS) HEREBY DISCLAIMS ANY AND ALL REPRESENTATIONS AND WARRANTIES IN RELATION TO THE BOARD, ANY MODIFICATIONS, OR THIS AGREEMENT, WHETHER EXPRESS, IMPLIED, STATUTORY OR OTHERWISE, INCLUDING WITHOUT LIMITATION ANY AND ALL REPRESENTATIONS AND WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, NON-INFRINGEMENT, AND THOSE ARISING FROM A COURSE OF DEALING, TRADE USAGE, TRADE CUSTOM OR TRADE PRACTICE.

onsemi reserves the right to make changes without further notice to any board.

You are responsible for determining whether the board will be suitable for your intended use or application or will achieve your intended results. Prior to using or distributing any systems that have been evaluated, designed or tested using the board, you agree to test and validate your design to confirm the functionality for your application. Any technical, applications or design information or advice, quality characterization, reliability data or other services provided by **onsemi** shall not constitute any representation or warranty by **onsemi**, and no additional obligations or liabilities shall arise from **onsemi** having provided such information or services.

onsemi products including the boards are not designed, intended, or authorized for use in life support systems, or any FDA Class 3 medical devices or medical devices with a similar or equivalent classification in a foreign jurisdiction, or any devices intended for implantation in the human body. You agree to indemnify, defend and hold harmless **onsemi**, its directors, officers, employees, representatives, agents, subsidiaries, affiliates, distributors, and assigns, against any and all liabilities, losses, costs, damages, judgments, and expenses, arising out of any claim, demand, investigation, lawsuit, regulatory action or cause of action arising out of or associated with any unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of any products and/or the board.

This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and may not meet the technical requirements of these or other related directives.

FCC WARNING – This evaluation board/kit is intended for use for engineering development, demonstration, or evaluation purposes only and is not considered by **onsemi** to be a finished end product fit for general consumer use. It may generate, use, or radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment may cause interference with radio communications, in which case the user shall be responsible, at its expense, to take whatever measures may be required to correct this interference.

onsemi does not convey any license under its patent rights nor the rights of others.

LIMITATIONS OF LIABILITY: **onsemi** shall not be liable for any special, consequential, incidental, indirect or punitive damages, including, but not limited to the costs of requalification, delay, loss of profits or goodwill, arising out of or in connection with the board, even if **onsemi** is advised of the possibility of such damages. In no event shall **onsemi**'s aggregate liability from any obligation arising out of or in connection with the board, under any theory of liability, exceed the purchase price paid for the board, if any.

The board is provided to you subject to the license and other terms per **onsemi**'s standard terms and conditions of sale. For more information and documentation, please visit www.onsemi.com.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales