# NIS4461 Evaluation Board User's Manual

# **EVBUM2799/D**

#### Instructions

- Remove all jumpers from the headers if there are any in place
- Connect an ohmmeter across the Rlim measurement test points and set it to 20  $\Omega$  with a small screwdriver
- Connect a DC supply from Vin to GND and apply 24 V
- Check that Vout = 24 V, Ven ~ 4.6 V and the green LEDs are on
- Connect oscilloscope voltage probes to Vin (Ch1), Vout (Ch2), and EN (Ch4). For Ch3 connect a current probe in the main current path



#### ON Semiconductor®

www.onsemi.com

#### **EVAL BOARD USER'S MANUAL**



Figure 1. The Evaluation Board Photo

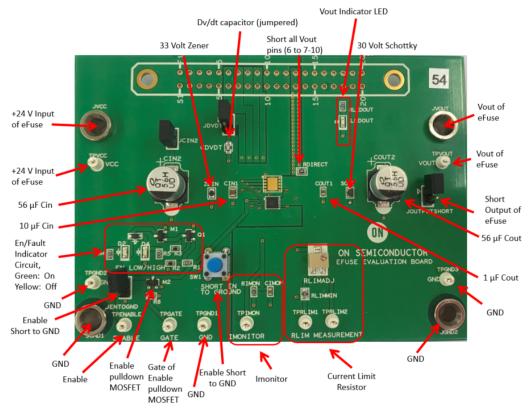


Figure 2. Features of the Evaluation Board

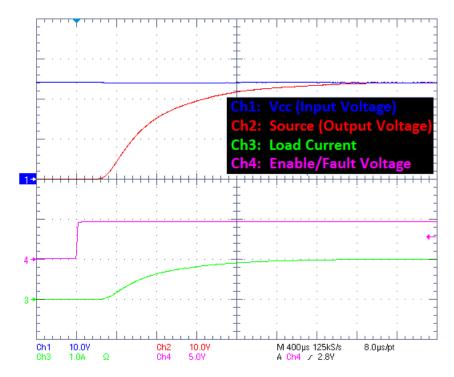


Figure 3. Hot Plug with dvdt Open into 24  $\Omega$  Load (400  $\mu$ s/Division Timescale)

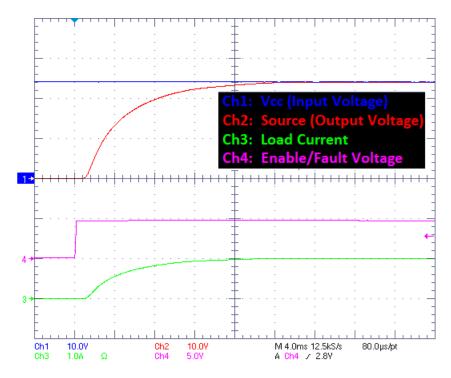


Figure 4. Hot Plug with 180 pF dvdt Capacitor Selected with Jumper Jdvdt into 24  $\Omega$  Load (4 ms/Division Timescale)

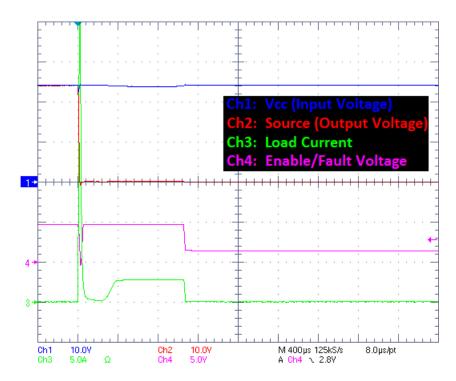


Figure 5. Sudden Short Circuit from Output to GND Showing ILIM\_SC and Thermal Shutdown (NIS4461MT1, Latching)

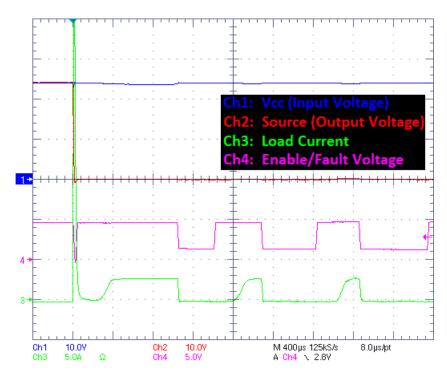


Figure 6. Sudden Short Circuit from Output to GND Showing ILIM\_SC and Thermal Shutdown (NIS4461MT3, Auto-Retry)

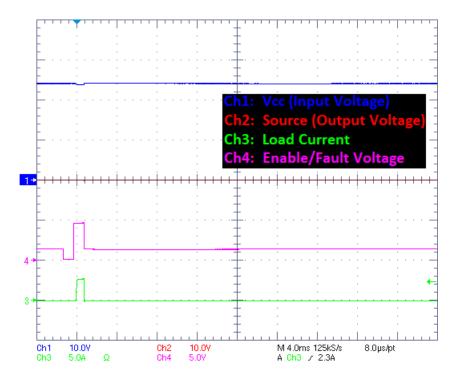


Figure 7. Toggling the EN/Fault Pin with a Pulse Generator to Reset from Thermal Shutdown with Vout Still Shorted to GND.

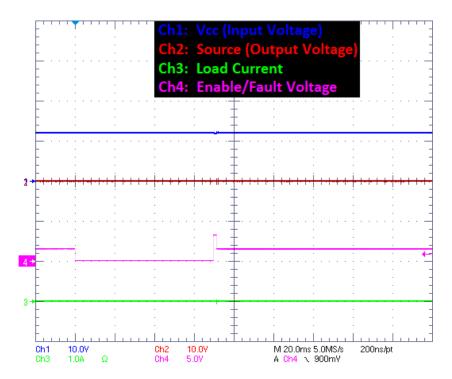


Figure 8. Drawing Current with an Electronic Load, Showing the Overload ( $I_{OL}$ ) and Short Circuit ( $I_{SC}$ ) Current Limits

## **EVALUATION BOARD SCHEMATIC**

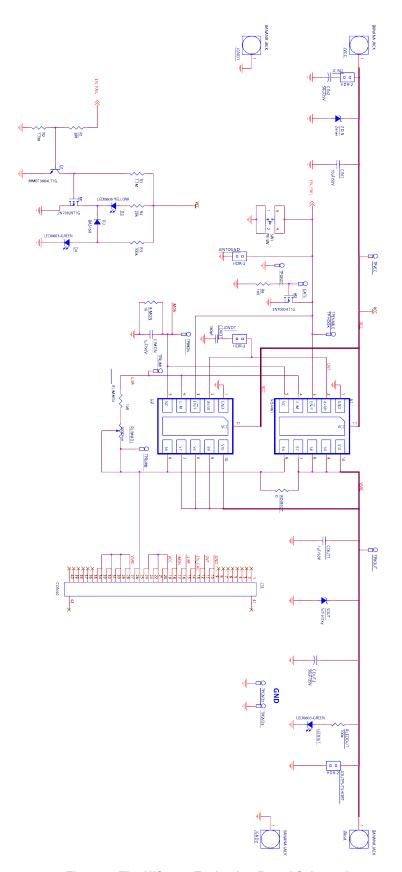


Figure 9. The NIS4461 Evaluation Board Schematic

## **BILL OF MATERIALS**

## **BILL OF MATERIALS**

| Item | Qty | Reference   | Part                      | Digikey Part Number | Manufacturer                       | Manufacturer Part<br>Number | DNP |
|------|-----|---|---------------------------|---------------------|------------------------------------|-----------------------------|-----|
| 1    | 1   | CDVDT   | 180 pF                    | 311-3890-1-ND       | Yageo                              | CC0603FRNPO9BN181           |     |
| 2    | 2   | CIMON, COUT1  | 1 μF/50V                  | 587-2400-1-ND       | Taiyo Yuden                        | UMK107BJ105KA-T             |     |
| 3    | 1   | CIN1  | 10 μF/50V                 | 490-18664-2-ND      | Murata Electronics                 | GRM21BR61H106ME43L          |     |
| 4    | 2   | COUT2, CIN2   | 56 μF/35V                 | 493-2304-2-ND       | Nichicon                           | UUD1H560MNL1GS              |     |
| 5    | 1   | D2  | LED0603-YELLOW            | 160-1448-1-ND       | Lite-On Inc                        | LTST-C191KSKT               |     |
| 6    | 1   | D3  | BAS16H                    | BAS16HT1GOSCT-ND    | ON Semiconductor                   | BAS16HT1G                   |     |
| 7    | 2   | D4, LEDOUT  | LED0603-GREEN             | 160-1888-1-ND       | Lite-On Inc                        | LTST-C191TGKT               |     |
| 8    | 0   | J13   | CON40                     | S3314-ND            | Sullins Connector<br>Solutions     | EBC20DRTH                   | DNP |
| 9    | 5   | JCOUT2, JCIN2,<br>JOUTPUTSHORT,<br>JENTOGND,<br>JDVDT                                       | HDR-2                     | 3M9447-ND           | ЗМ                                 | 961102-6404-AR              |     |
| 10   | 4   | JGND1, JGND2,<br>JVout, JVCC  | BANANA JACK               | 36-575-8-ND         | Keystone Electronics               | 575–8                       |     |
| 11   | 2   | M1, M2  | 2N7002KT1G                | 2N7002KT1GOSCT-ND   | ON Semiconductor                   | 2N7002KT1G                  |     |
| 12   | 1   | Q1  | MMBT3904LT1G              | MMBT3904LT1GOSCT-ND | ON Semiconductor                   | MMBT3904LT1G                |     |
| 13   | 1   | R1  | 3 ΜΩ                      | P3.0MGCT-ND         | Panasonic Electronic<br>Components | ERJ-3GEYJ305V               |     |
| 14   | 2   | R2, R3  | 1.1 ΜΩ                    | P1.1MGCT-ND         | Panasonic Electronic<br>Components | ERJ-3GEYJ115V               |     |
| 15   | 1   | R4  | 20 kΩ                     | P20KGTR-ND          | Panasonic Electronic<br>Components | ERJ-3GEYJ203V               |     |
| 16   | 1   | R6  | 10 kΩ                     | P10KGCT-ND          | Panasonic Electronic<br>Components | ERJ-3GEYJ103V               |     |
| 17   | 2   | R5, RLEDOUT   | 100 kΩ                    | P100KGTR-ND         | Panasonic Electronic<br>Components | ERJ-3GEYJ104V               |     |
| 18   | 1   | RDIRECT   | 0 Ω                       | P0.0ACT-ND          | Panasonic Electronic<br>Components | ERJ-6GEY0R00V               |     |
| 19   | 1   | RIMON   | 1 kΩ                      | P1.0KDBTR-ND        | Panasonic Electronic<br>Components | ERA-3AEB102V                |     |
| 20   | 1   | RLIMADJ   | 100 Ω                     | 3214X-1-101ECT-ND   | Bourns Inc.                        | 3214X-1-101E                |     |
| 21   | 1   | RLIMMIN   | 10 Ω                      | 311-10.0HRCT-ND     | Yageo                              | RC0603FR-0710RL             |     |
| 22   | 1   | SW1   | PB-SW                     | EG4369-ND           | E-Switch                           | TL1105FF160Q                |     |
| 23   | 10  | TPRLIM1, TPGND1,<br>TPRLIM2, TPGND2,<br>TPGND3, TPVOUT,<br>TPVCC, TPIMON,<br>TPENABLE, GATE | TP-HOOK                   | 36–5002–ND          | Keystone Electronics               | 5002                        |     |
| 24   | 1   | U1  | NIS4461MT1/<br>NIS4461MT3 |                     | ON Semiconductor                   |                             |     |
| 25   | 0   | U2  |                           |                     |                                    |                             | DNP |
| 26   | 1   | ZDIN  | 33 Vz                     | MM5Z33VT1GOSTR-ND   | ON Semiconductor                   | MM5Z33VT1G                  |     |
| 27   | 1   | SOUT  | 30 V Schottky             | NSR0530HT1GOSCT-ND  | ON Semiconductor                   | NSR0530HT1G                 |     |

All brand names and product names appearing in this document are registered trademarks or trademarks of their respective holders.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="https://www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. onsemi is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

The evaluation board/kit (research and development board/kit) (hereinafter the "board") is not a finished product and is not available for sale to consumers. The board is only intended for research, development, demonstration and evaluation purposes and will only be used in laboratory/development areas by persons with an engineering/technical training and familiar with the risks associated with handling electrical/mechanical components, systems and subsystems. This person assumes full responsibility/liability for proper and safe handling. Any other use, resale or redistribution for any other purpose is strictly prohibited.

THE BOARD IS PROVIDED BY ONSEMI TO YOU "AS IS" AND WITHOUT ANY REPRESENTATIONS OR WARRANTIES WHATSOEVER. WITHOUT LIMITING THE FOREGOING, ONSEMI (AND ITS LICENSORS/SUPPLIERS) HEREBY DISCLAIMS ANY AND ALL REPRESENTATIONS AND WARRANTIES IN RELATION TO THE BOARD, ANY MODIFICATIONS, OR THIS AGREEMENT, WHETHER EXPRESS, IMPLIED, STATUTORY OR OTHERWISE, INCLUDING WITHOUT LIMITATION ANY AND ALL REPRESENTATIONS AND WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, NON-INFRINGEMENT, AND THOSE ARISING FROM A COURSE OF DEALING, TRADE USAGE, TRADE CUSTOM OR TRADE PRACTICE.

onsemi reserves the right to make changes without further notice to any board.

You are responsible for determining whether the board will be suitable for your intended use or application or will achieve your intended results. Prior to using or distributing any systems that have been evaluated, designed or tested using the board, you agree to test and validate your design to confirm the functionality for your application. Any technical, applications or design information or advice, quality characterization, reliability data or other services provided by **onsemi** shall not constitute any representation or warranty by **onsemi**, and no additional obligations or liabilities shall arise from **onsemi** having provided such information or services.

onsemi products including the boards are not designed, intended, or authorized for use in life support systems, or any FDA Class 3 medical devices or medical devices with a similar or equivalent classification in a foreign jurisdiction, or any devices intended for implantation in the human body. You agree to indemnify, defend and hold harmless onsemi, its directors, officers, employees, representatives, agents, subsidiaries, affiliates, distributors, and assigns, against any and all liabilities, losses, costs, damages, judgments, and expenses, arising out of any claim, demand, investigation, lawsuit, regulatory action or cause of action arising out of or associated with any unauthorized use, even if such claim alleges that onsemi was negligent regarding the design or manufacture of any products and/or the board.

This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and may not meet the technical requirements of these or other related directives.

FCC WARNING – This evaluation board/kit is intended for use for engineering development, demonstration, or evaluation purposes only and is not considered by **onsemi** to be a finished end product fit for general consumer use. It may generate, use, or radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment may cause interference with radio communications, in which case the user shall be responsible, at its expense, to take whatever measures may be required to correct this interference.

onsemi does not convey any license under its patent rights nor the rights of others.

LIMITATIONS OF LIABILITY: **onsemi** shall not be liable for any special, consequential, incidental, indirect or punitive damages, including, but not limited to the costs of requalification, delay, loss of profits or goodwill, arising out of or in connection with the board, even if **onsemi** is advised of the possibility of such damages. In no event shall **onsemi**'s aggregate liability from any obligation arising out of or in connection with the board, under any theory of liability, exceed the purchase price paid for the board, if any.

The board is provided to you subject to the license and other terms per **onsemi**'s standard terms and conditions of sale. For more information and documentation, please visit www.onsemi.com.

#### **ADDITIONAL INFORMATION**

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales