


SIP28 78x31.1  
CASE 127DG  
ISSUE A

DATE 26 AUG 2016

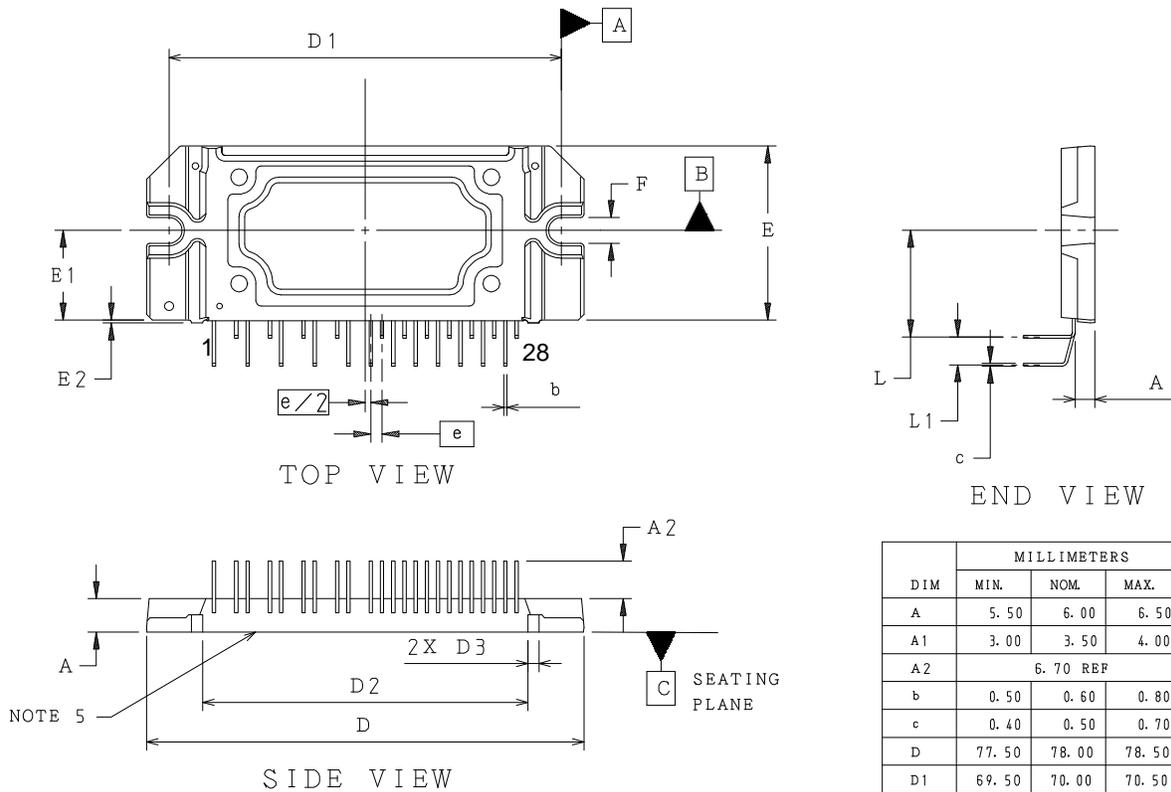

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
A	5.50	6.00	6.50
A1	3.00	3.50	4.00
A2	6.70 REF		
b	0.50	0.60	0.80
c	0.40	0.50	0.70
D	77.50	78.00	78.50
D1	69.50	70.00	70.50
D2	57.50	58.00	58.50
D3	1.50	2.00	2.50
E	30.60	31.10	31.60
E1	15.50	16.00	16.50
E2	0.00	0.50	1.00
e	2.00 BSC		
F	4.10	4.60	5.10
L	18.50	19.00	19.50
L1	4.50	5.00	5.50

NOTES:

- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2009.
- CONTROLLING DIMENSION: MILLIMETERS
- DIMENSIONS b AND c APPLY TO THE PLATED LEAD AND ARE MEASURED BETWEEN 1.00 AND 2.00 FROM THE LEAD TIP.
- PACKAGE IS MISSING PINS: 2, 5, 8, 11, AND 14.
- BASE MUST BE FLAT WITHIN 0.15 (CONVEX).

<b>DOCUMENT NUMBER:</b>	<b>98AON84149F</b>	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
<b>DESCRIPTION:</b>	<b>SIP28 78X31.1</b>	<b>PAGE 1 OF 1</b>

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.