

Bluetooth® Qualification Guidelines for RSL10-Based Products



ON Semiconductor®

www.onsemi.com

Introduction

In order to sell a Bluetooth-enabled device, the Bluetooth qualification and declaration process must be completed to demonstrate and declare that the product satisfies the requirements of the Bluetooth license agreements. The Bluetooth Compatibility Program complies with the requirements of Bluetooth license agreements and ensures a seamless user experience through the vast number of Bluetooth mobile devices that are available in the market.

This application note details the fundamental process of releasing a Bluetooth low energy technology product based on RSL10.

Once a product based on RSL10 is complete and ready for release to market, the product must be qualified.

On 1 February 2014, the Bluetooth Special Interest Group (SIG) introduced a new qualification and listing process and fee structure for all new product listings. Detailed information can be found on the Bluetooth SIG website.

Qualification Process

1. Become a Bluetooth SIG member and purchase a Declaration ID.
Detailed information can be found on the Bluetooth SIG website.
2. Prepare product information and submit to a Bluetooth Qualification Test Facility (BQTF). The BQTF will estimate the qualification test and procedure costs.
The following information will need to be prepared and submitted to a BQTF:

	RSL10 Product Information
Core Specification of the Product	5.0
Product Type (End Product, Subsystem, or Component)	End Product
Profiles Supported	Available in the Qualified Design Listing (QDL) information sheet.
Brand, Model, and QDID of the Product's Bluetooth SoC	QDID: 92528
	Declaration ID: D034220

APPLICATION NOTE

The BQTF will estimate the qualification test cost based on the information above and provide a quotation for testing. A list of all BQTFs can be obtained through the Bluetooth SIG. A Bluetooth Qualification Expert (BQE) from an authorized testing house can provide advice during the qualification test.

NOTE: ON Semiconductor used AT4Wireless for Bluetooth qualification and certification tests, including FCC, IC and CE.

3. Provide product samples to a BQTF for testing
Several product samples are required to be submitted for testing, including:

- ◆ Product sample for RF testing

These samples must be ready for conducted RF tests, so the product vendor will need to disconnect the antenna and use a 50 Ω SMA connector for the connection to test equipment. The product vendor will also need to provide instructions for entering Test Mode and for the Bluetooth low energy technology RF PHY test. These test samples will need an available UART interface.

- ◆ Product sample for profile test (optional for hearing aids)

If any adoptable profiles will be listed in QDL, a final product must be submitted for this test. Custom profiles do not require testing.

NOTE: You will need to provide a power supply connection for all samples, as a battery cannot support the current consumption in Test Mode for the duration of the test.

4. Create a new product listing. You will need to sign a Declaration of Compliance (DoC). Once the qualification process is done, your device is officially Bluetooth compliant. You may display the Bluetooth logo on your product.

Putting the RSL10 into Direct Test Mode

In order to put RSL10 into Direct Test Mode, you will need to flash the device with the Host Controller Interface (HCI) source code provided in the Direct Test Mode folder of the RSL10 development tools. For detailed instructions, refer to section 3 of *Getting Started with RSL10*.

Instead of the firmware file described in the manual, you will need to flash RSL10 with the HCI source code.

Emulating a UART Interface

RSL10 uses configurable digital input/output (DIO) pads which can be configured to provide a UART interface. For complete configuration instructions, please refer to the readme provided with the HCI sample code.

In this configuration, you can change to the other DIO. If headers are provided, you will need to connect two jumper wires onto the two DIO pads, and connect to a bi-directional level shifter. You will need this because RSL10's logic level is between 1.1 and 3.3 V depending on VDDO voltage level, which is not directly compatible with the RS232 cable. This set-up is shown in Figure 1.

Putting the RSL10-based Product into Test Mode:

1. Program RSL10 with HCI sample code using the Flash Loader.
2. Configure the DIO for UART interface pass through as described in the readme provided with the HCI sample application.
3. Connect the DUT, level shifter, RS232 USB adapter, and Bluetooth low energy test equipment as shown in Figure 1.
4. Configure the Bluetooth low energy test equipment, making sure the UART baud rate is 9600 kbps.

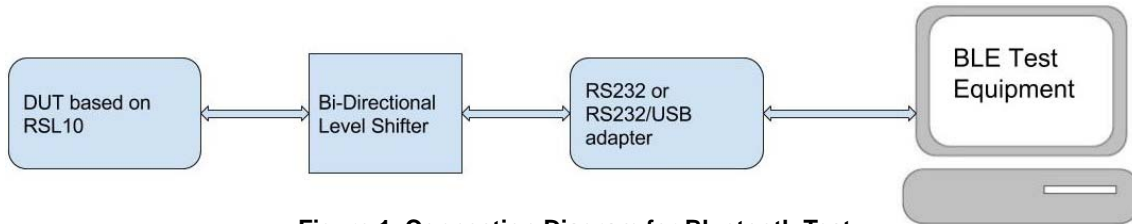


Figure 1. Connection Diagram for Bluetooth Test

NOTE: Pay particular attention to the filter used between the RF port and antenna on the RSL10 Evaluation & Development board to ensure maximum performance.

Manufacturer Configuration

When conducting the Bluetooth C/I performance test, the image frequency should be set for the 1 Mbps and 2 Mbps data rates. The image frequency suggested for the Bluetooth low energy 1 Mbps performance test is -2 MHz from the configured carrier frequency. The image frequency suggested for the Bluetooth low energy 2 Mbps performance test is -4 MHz from the configured carrier frequency.

When conducting the inter-modulation performance test the inter-modulation distance must be set. The recommended inter-modulation distance, 'n' is 3 for RLS10.

Certification Process

A Bluetooth product contains a wireless radio working at 2.4 GHz ISM band. In order to sell in different countries and regions, some certification tests must be passed.

Here is a list of certification tests required in specific countries or regions:

- United States of America (FCC)
- Canada (IC)
- Europe (CE)
- China (SRRC)
- Korea (KCC)
- Japan (JRF TELEC)

For detailed information on certification testing required in your country or region, please contact an authorized testing facility.


The RSL10 Evaluation and Development Board design has passed FCC certification and CE certification testing at AT4 Wireless lab. During the certification and emission test, ON Semiconductor used an off-the-shelf SMA antenna, ANT-2.4-CW-RAH-SMA-ND from Linx Technologies, which has 1.6 dBi peak gain. Please be aware in this test we had a cable connected to antenna with 1 dB loss.

NOTE: Pay particular attention to the filter used between the RSL10 evaluation board RF port and antenna for the appropriate emission.

Further Reading

For more information on the reference design, please refer to the documentation provided as part of the RSL10 development tools package.

Bluetooth is a registered trademark of Bluetooth SIG.

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
 USA/Canada
Europe, Middle East and Africa Technical Support:
 Phone: 421 33 790 2910
Japan Customer Focus Center
 Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com
Order Literature: <http://www.onsemi.com/orderlit>
 For additional information, please contact your local
 Sales Representative