# **Schottky Rectifier**

10 A, 60 V Ultra-Low VF

# **FSV1060V**

### Description

The FSV1060V schottky rectifier offers break-through size and performance. The device is optimized for mobile charger applications. It sinks only 13 mA reverse current at high temperature and provides forward voltage drop of 0.2 V at 1 A operating current in a charger design.

All this capability is packed into a small, flat-lead, TO-277 package, optimized for space-constrained applications. The FSV1060V supports a typical Z height of 1.1 mm. It is RoHS compliant and halogen free. It is also qualified for a wave soldering process.

#### Features

- Ultra–Low Forward Voltage Drop:
  - 0.47 V Typical at 10 A,  $T_A = 25^{\circ}C$
  - 0.52 V Maximum at 10 A,  $T_A = 25^{\circ}C$
- Low Thermal Resistance
- Very Low Profile: Typical Height of 1.1 mm
- Meets MSL 1 per JESD22-A111 Full-Body Solder Immersion
- Non–DAP Option Only
- These Devices are Pb-Free, Halogen Free and are RoHS Compliant


#### Applications


- Mobile Charger
- Solar Panel
- Reverse Polarity Protection



## **ON Semiconductor®**


#### www.onsemi.com





TO-277-3LD CASE 340BQ

#### MARKING DIAGRAM



#### **ORDERING INFORMATION**

See detailed ordering and shipping information on page 3 of this data sheet.

## FSV1060V

#### Specifications

#### ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub> = 25°C unless otherwise noted) (Note 1)

Symbol	Parameter	Value	Unit
V <sub>RRM</sub>	Peak Repetitive Reverse Voltage	60	V
V <sub>RWM</sub>	Working Peak Reverse Voltage	60	V
V <sub>RMS</sub>	RMS Reverse Voltage	42	V
V <sub>R</sub>	DC Blocking Voltage	60	V
Ι <sub>Ο</sub>	Average Rectified Output Current at $T_L = 90^{\circ}C$ (Note 2)	10	А
I <sub>FSM</sub>	Non-Repetitive Peak Forward Surge Current (Note 3)	280	A
CJ	Typical Junction Capacitance, $V_R = 4 V$ , 1 MHz	550	pF
TJ	Operating Junction Temperature Range	-55 to +150	°C
T <sub>STG</sub>	Storage Temperature Range	-55 to +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. All test conducted at  $T_A = T_J = 25^{\circ}C$  unless otherwise noted. 2. Mounted on 30 mm x 30 mm FR4 PCB.

3. Pulse condition: 8.3 ms single half-sine wave. Test method is compliant with MIL standard (MIL-STD-750E).

#### THERMAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise noted) (Note 4)

Symbol	Characteristic	Minimum Land Pattern	Maximum Land Pattern	Unit
$R_{\theta JA}$	Junction-to-Ambient Thermal Resistance	105	38	°C/W
Ψ <sub>JL</sub>	Junction-to-Lead Thermal Characteristics, Thermocouple Soldered to Anode	18	13	°C/W
	Junction-to-Lead Thermal Characteristics, Thermocouple Soldered to Cathode	8	5	

4. The thermal resistances ( $R_{\theta JA} \& \Psi_{JL}$ ) are characterized with device mounted on the following FR4 printed circuit boards, as shown in Figure 1 and Figure 2. PCB size: 76.2 x 114.3 mm. Minimum land pattern size: 4.9 x 4.8 mm (big pattern, x1), 1.4 x 1.52 mm (small pattern, x2). Maximum land pattern size: 30 x 30 mm (pattern, x2). Force line trace size = 55 mils, sense line trace size = 4 mils.



Figure 1. Minimum Land Pattern of 2 oz Copper




Figure 2. Maximum Land Pattern of 2 oz Copper

# FSV1060V

### **ELECTRICAL CHARACTERISTICS** ( $T_A = 25^{\circ}C$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
BV <sub>R</sub>	Breakdown Voltage	I <sub>T</sub> = 500 μA	60	-	-	V
V <sub>F</sub>	Forward Voltage Drop	I <sub>F</sub> = 1 A	-	0.30	-	V
		I <sub>F</sub> = 10 A	-	0.47	0.52	
		I <sub>F</sub> = 1 A, T <sub>A</sub> = 125°C	-	0.20	-	
		I <sub>F</sub> = 10 A, T <sub>A</sub> = 125°C	-	0.46	-	
I <sub>R</sub>	Maximum Leakage	V = V <sub>RWM</sub>	-	0.056	0.220	mA
		$V = V_{RWM}, T_A = 125^{\circ}C$	-	13	-	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.


#### **ORDERING INFORMATION**

Part Number	Top Mark	Package	Shipping <sup>†</sup>
FSV1060V	FSV1060V	TO–277–3LD (Pb–Free/Halogen Free)	5000 / Tape & Reel

+For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

## FSV1060V

## **TYPICAL PERFORMANCE CHARACTERISTICS**



**Figure 3. Forward Current Characteristics** 




Figure 5. Typical Junction Capacitance




Figure 7. Surge Current Derating Curve




Figure 4. Typical Reverse Characteristics





Figure 6. Forward Current Derating Curve



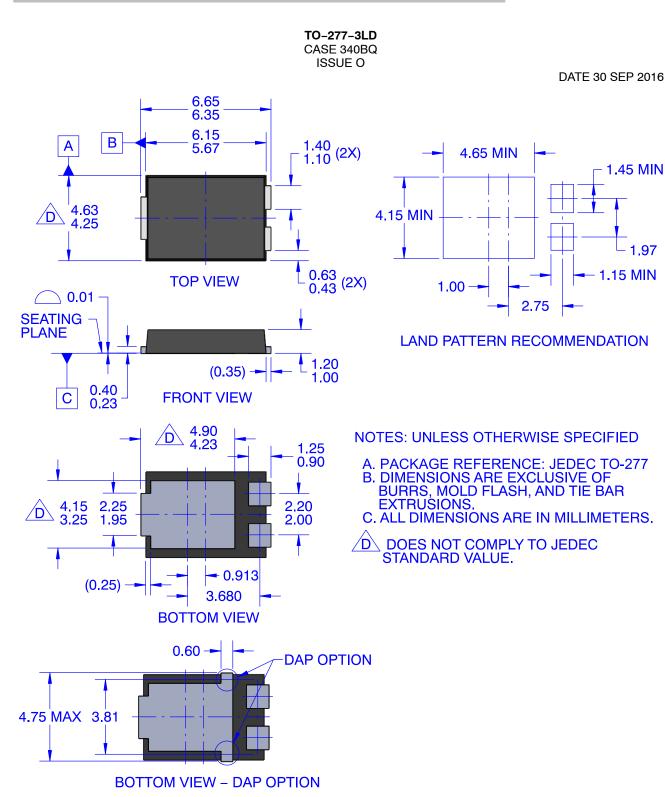

DOCUMENT NUMBER:	98AON13861G	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	TO-277-3LD		PAGE 1 OF 1	

ON Semiconductor and unarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent\_Marking.pdf</u>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or indental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification. Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs,

#### ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation onsemi Website: www.onsemi.com

ONLINE SUPPORT: <u>www.onsemi.com/support</u> For additional information, please contact your local Sales Representative at <u>www.onsemi.com/support/sales</u>