# **Power MOSFET** 30 V, 91 A, Single N-Channel, SO-8 FL


# Features

- Low R<sub>DS(on)</sub> to Minimize Conduction Losses
- Low Capacitance to Minimize Driver Losses
- Optimized Gate Charge to Minimize Switching Losses
- Dual Sided Cooling Capability
- These Devices are Pb-Free, Halogen Free and are RoHS Compliant

# Applications

• CPU Power Delivery, DC-DC Converters

# **MAXIMUM RATINGS** (T<sub>J</sub> = $25^{\circ}$ C unless otherwise stated)

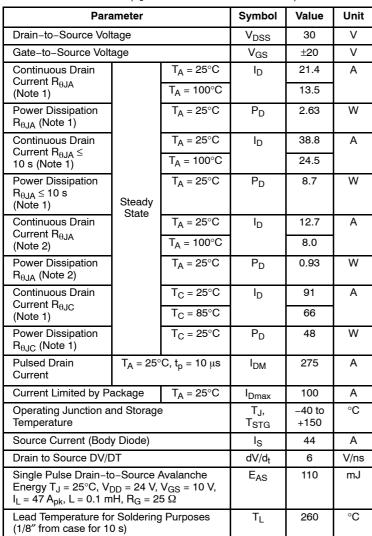

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Surface-mounted on FR4 board using 1 sq-in pad, 1 oz Cu.


2. Surface-mounted on FR4 board using the minimum recommended pad size.




# **ON Semiconductor®**

#### http://onsemi.com

V <sub>(BR)DSS</sub>	R <sub>DS(ON)</sub> MAX	I <sub>D</sub> MAX
30 V	$3.3~\mathrm{m}\Omega @ 10~\mathrm{V}$	91 A
30 V	4.8 mΩ @ 4.5 V	75 A



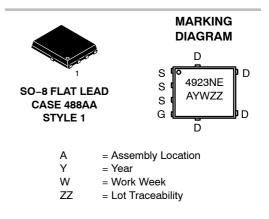

# ORDERING INFORMATION

Device	Package	Shipping <sup>†</sup>
NTMFS4923NET1G	SO-8 FL (Pb-Free)	1500 / Tape & Reel
NTMFS4923NET3G	SO-8 FL (Pb-Free)	5000 / Tape & Reel

+ For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# THERMAL RESISTANCE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Junction-to-Case (Drain)	$R_{ ext{ heta}JC}$	2.6	
Junction-to-Ambient - Steady State (Note 3)	$R_{ hetaJA}$	47.5	
Junction-to-Ambient - Steady State (Note 4)	$R_{\thetaJA}$	134.8	°C/W
Junction-to-Ambient – (t $\leq$ 10 s) (Note 3)	$R_{\thetaJA}$	14.4	
Junction-to-Top	$R_{\theta JT}$	8.3	

3. Surface-mounted on FR4 board using 1 sq-in pad, 1 oz Cu.

4. Surface-mounted on FR4 board using the minimum recommended pad size.

# **ELECTRICAL CHARACTERISTICS** (T<sub>J</sub> = $25^{\circ}$ C unless otherwise specified)

Parameter	Symbol	Test Condition		Min	Тур	Max	Unit
OFF CHARACTERISTICS				-			
Drain-to-Source Breakdown Voltage	V <sub>(BR)DSS</sub>	$V_{GS}$ = 0 V, I <sub>D</sub> =	250 μA	30			V
Drain-to-Source Breakdown Voltage Temperature Coefficient	V <sub>(BR)DSS</sub> / T <sub>J</sub>				15		mV/°C
Zero Gate Voltage Drain Current	$I_{DSS}$ $V_{GS} = 0 V$ , $T_J = 25^{\circ}C$	$T_J = 25^{\circ}C$			1.0		
		$V_{DS} = 24 V$	T <sub>J</sub> = 125°C			10	μΑ
Gate-to-Source Leakage Current	I <sub>GSS</sub>	$V_{DS}$ = 0 V, $V_{GS}$ = ±20 V				±100	nA
ON CHARACTERISTICS (Note 5)							
Gate Threshold Voltage	V <sub>GS(TH)</sub>	$V_{GS} = V_{DS}$ , $I_D = 250 \ \mu A$		1.2	1.63	2.0	V
Negative Threshold Temperature Coefficient	V <sub>GS(TH)</sub> /T <sub>J</sub>				4.0		mV/°C
Drain-to-Source On Resistance	R <sub>DS(on)</sub>	R <sub>DS(on)</sub> V <sub>GS</sub> = 10 V	I <sub>D</sub> = 30 A		2.7	3.3	
			I <sub>D</sub> = 15 A		2.7		
		V <sub>GS</sub> = 4.5 V	I <sub>D</sub> = 30 A		3.7	4.8	mΩ
			I <sub>D</sub> = 15 A		3.7		
Forward Transconductance	<b>9</b> FS	V <sub>DS</sub> = 1.5 V, I <sub>D</sub> = 15 A			32		S

#### **CHARGES, CAPACITANCES & GATE RESISTANCE**

Input Capacitance	C <sub>ISS</sub>		3579	4850	
Output Capacitance	C <sub>OSS</sub>	V <sub>GS</sub> = 0 V, f = 1 MHz, V <sub>DS</sub> = 15 V	1264	1710	pF
Reverse Transfer Capacitance	C <sub>RSS</sub>		39	59	
Total Gate Charge	Q <sub>G(TOT)</sub>	V <sub>GS</sub> = 4.5 V, V <sub>DS</sub> = 15 V; I <sub>D</sub> = 30 A	22		
Threshold Gate Charge	Q <sub>G(TH)</sub>		5.6		
Gate-to-Source Charge	Q <sub>GS</sub>		10.2		nC
Gate-to-Drain Charge	Q <sub>GD</sub>		3.0		
Total Gate Charge	Q <sub>G(TOT)</sub>	$V_{GS}$ = 10 V, $V_{DS}$ = 15 V; $I_{D}$ = 30 A	49.4		nC

#### SWITCHING CHARACTERISTICS (Note 6)

Turn-On Delay Time	t <sub>d(ON)</sub>		16.3	
Rise Time	t <sub>r</sub>	V <sub>GS</sub> = 4.5 V, V <sub>DS</sub> = 15 V,	20	
Turn-Off Delay Time	t <sub>d(OFF)</sub>	$I_{\rm D}$ = 15 A, $R_{\rm G}$ = 3.0 $\Omega$	27.5	ns
Fall Time	t <sub>f</sub>		6.6	


 $\begin{array}{ll} \text{5. Pulse Test: pulse width} \leq 300 \ \mu\text{s} \text{, duty cycle} \leq 2\%. \\ \text{6. Switching characteristics are independent of operating junction temperatures.} \end{array}$ 

# **ELECTRICAL CHARACTERISTICS** (T<sub>J</sub> = $25^{\circ}$ C unless otherwise specified)


Parameter	Symbol	Test Condition		Min	Тур	Max	Unit
SWITCHING CHARACTERISTICS (N	ote 6)						
Turn-On Delay Time	t <sub>d(ON)</sub>	$V_{GS}$ = 10 V, $V_{DS}$ = 15 V, I <sub>D</sub> = 15 A, R <sub>G</sub> = 3.0 Ω			11.2		
Rise Time	t <sub>r</sub>				18.7		ns
Turn-Off Delay Time	t <sub>d(OFF)</sub>				28.3		
Fall Time	t <sub>f</sub>				12.1		
DRAIN-SOURCE DIODE CHARACTI	ERISTICS						
Forward Diode Voltage	V <sub>SD</sub>	$V_{GS} = 0 V, I_{S} = 30 A T_{J} = 25^{\circ}C T_{J} = 125^{\circ}C$	$T_J = 25^{\circ}C$		0.85	1.1	N
			T <sub>J</sub> = 125°C		0.72		V
Reverse Recovery Time	t <sub>RR</sub>	V <sub>GS</sub> = 0 V, dIS/dt = 100 A/μs, I <sub>S</sub> = 30 A			44.4		ns
Charge Time	t <sub>a</sub>				21.6		
Discharge Time	t <sub>b</sub>				22.8		
Reverse Recovery Charge	Q <sub>RR</sub>				45		nC
PACKAGE PARASITIC VALUES							
Source Inductance	L <sub>S</sub>	−T <sub>A</sub> = 25°C			0.65		nH
Drain Inductance	L <sub>D</sub>				0.005		nH
Gate Inductance	L <sub>G</sub>				1.84		nH
Gate Resistance	R <sub>G</sub>				1.1	2.0	Ω

Pulse Test: pulse width ≤ 300 μs, duty cycle ≤ 2%.
Switching characteristics are independent of operating junction temperatures.

# **TYPICAL CHARACTERISTICS**

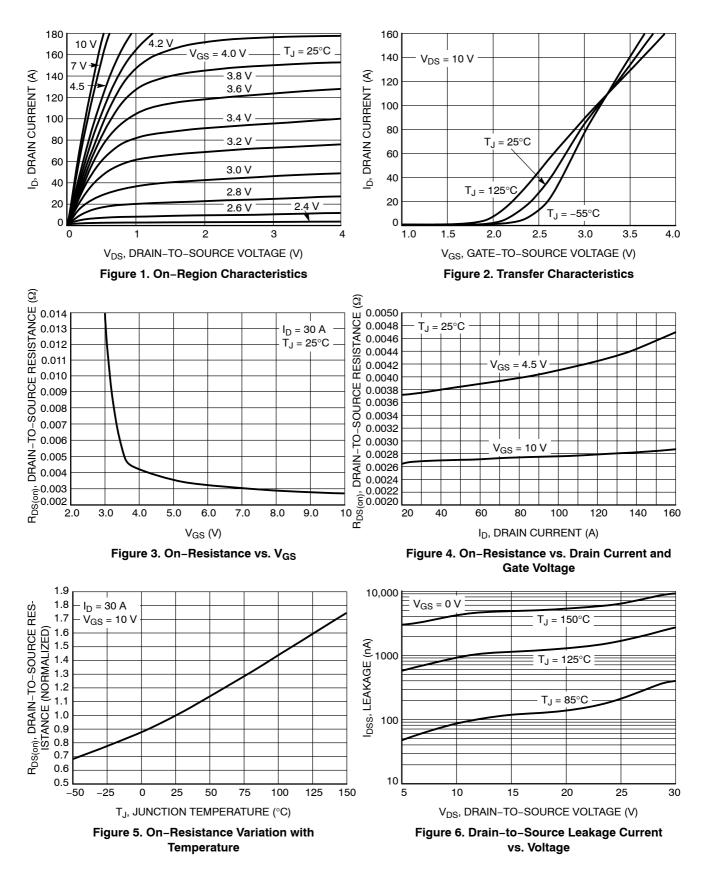

# **TYPICAL CHARACTERISTICS**

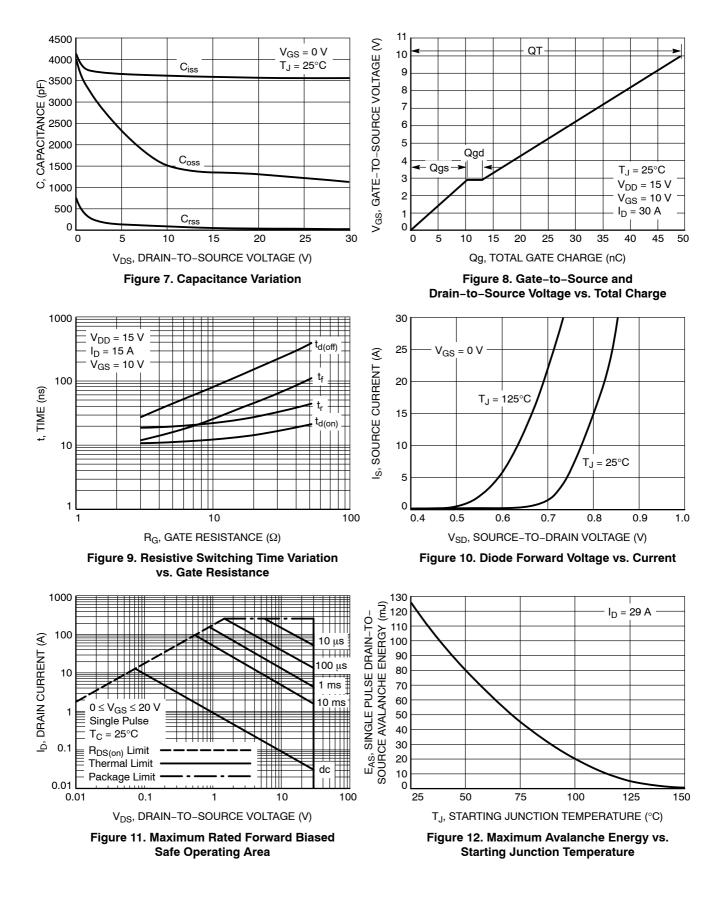

# **TYPICAL CHARACTERISTICS**


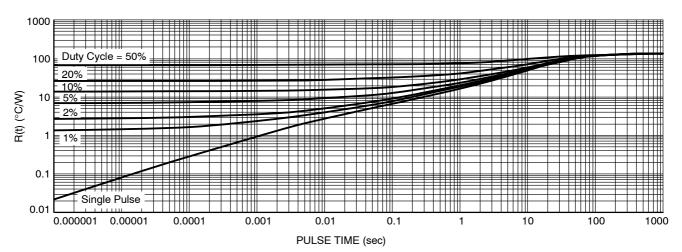


Figure 13. Thermal Response



# onsemi

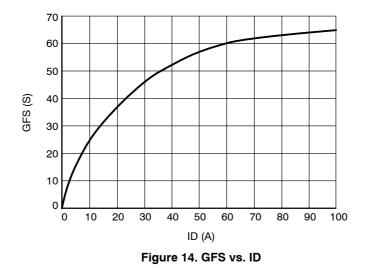

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent\_Marking.pdf</u>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or indental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification. Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs,

#### ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation onsemi Website: www.onsemi.com

ONLINE SUPPORT: <u>www.onsemi.com/support</u> For additional information, please contact your local Sales Representative at <u>www.onsemi.com/support/sales</u>