

ON Semiconductor

Is Now

onsemi™

To learn more about onsemi™, please visit our website at
www.onsemi.com

onsemi and **onsemi** and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi** product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner. Other names and brands may be claimed as the property of others.



ON Semiconductor®

www.onsemi.com

Release Note for MicroRB-10035-MLP Lot No. 5021xxLOWx, EE50212xLO, 02115LOWAZ, 2114LOWCZZ

Parts Tested

- MicroRB-10035-MLP-TR
- MicroRB-10035-MLP-TR1

APPLICATION NOTE

LOT NUMBERS

02115LOWAZ	502116LOWC	502119LOWB	502121LOWC	EE502120LO
2114LOWCZZ	502117LOWA	502119LOWC	502122LOWB	EE502123LO
502113LOWB	502117LOWC	502120LOWA	502122LOWC	
502114LOWA	502118LOWA	502120LOWB	502123LOWA	
502114LOWB	502118LOWB	502121LOWA	502123LOWB	
502116LOWB	502118LOWC	502121LOWB	502123LOWC	

Test Summary

The following parameters are specific to the above-mentioned lots. All other performance parameters for this lot can be found in the product datasheet.

Table 1. LOT SPECIFIC PARAMETERS

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Breakdown voltage	Vbr2 ^{1*}	21°C	24.5	25.7	26.5	V
Overvoltage	Vov	21°C		10	15	V

*Vbr2 is defined as the value of the 0 intercept of a straight line fit to a plot of \sqrt{I} vs V, where I is measured dark current and V is applied reverse bias voltage and the part is in Geiger mode. (Measured on packaged parts.)

Temperature Dependence of Breakdown Voltage

The value of V_{br2}^\dagger as a function of temperature is plotted in Figure 1.

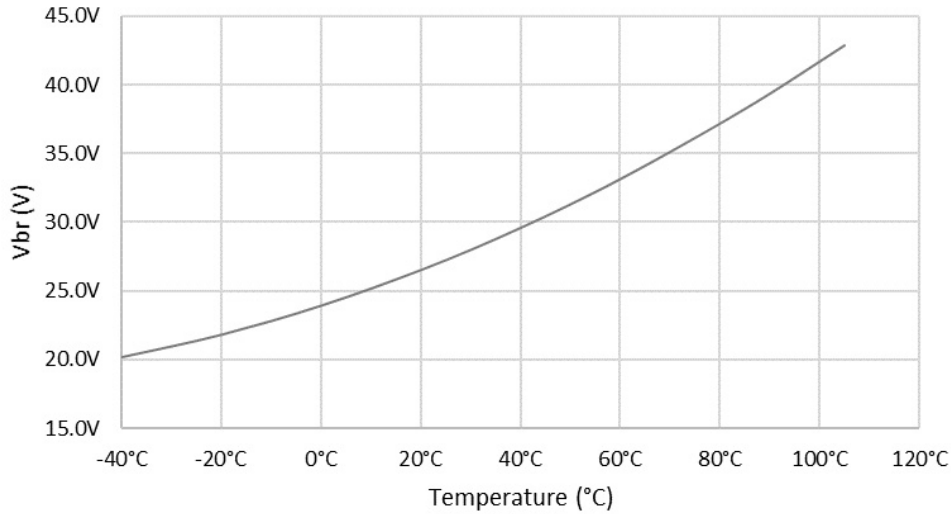


Figure 1. Temperature Dependence of Vbr2

Figure 1 can be approximated by the equation:

$$V_{br2} = a \times T^2 + b \times T + c \quad (\text{eq. 1})$$

where T = temperature in °C and fit parameters are given in Table 2.


Datasheet

The datasheet for this device is available at <https://www.onsemi.com/pub/Collateral/MICROB-SERIES-D.PDF>.

Table 2. FIT PARAMETERS FOR Vbr2(T)

a	5.99E-04
b	1.18E-01
c	23.90

[†]V_{br2} is defined as the value of the 0 intercept of a straight line fit to a plot of \sqrt{I} vs V, where I is measured dark current and V is applied reverse bias voltage and the part is in Geiger mode. (Measured on packaged parts.)

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Email Requests to: orderlit@onsemi.com

ON Semiconductor Website: www.onsemi.com

TECHNICAL SUPPORT

North American Technical Support:
Voice Mail: 1 800-282-9855 Toll Free USA/Canada
Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative