

# MOSFET – Power, P-Channel, Single ECH8

**-12 V, -10 A, 12.5 mΩ**

## ECH8308

### 特長

- ロードスイッチング用途に最適
- 1.8 V 駆動
- 保護ダイオード入り
- 低オン抵抗
- This is a Pb-Free and Halide Free Device


### 絶対最大定格 ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

項目	記号	条件	定格値	Unit
ドレイン・ソース電圧	V <sub>DSS</sub>		-12	V
ゲート・ソース電圧	V <sub>GSS</sub>		±10	V
ドレイン電流 (DC)	I <sub>D</sub>		-10	A
ドレイン電流 (パルス)	I <sub>DP</sub>	PW ≤ 10 μs, duty cycle ≤ 1%	-40	A
許容損失	P <sub>D</sub>	セラミック基板 (900 mm <sup>2</sup> × 0.8 mm) 装着時	1.6	W
チャネル温度	T <sub>ch</sub>		150	°C
保存周囲温度	T <sub>stg</sub>		-55~ +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


(参考訳)

最大定格を超えるストレスは、デバイスにダメージを与える危険性があります。これらの定格値を超えた場合は、デバイスの機能性を損ない、ダメージが生じ、信頼性に影響を及ぼす危険性があります。




SOT-28FL / ECH8  
CASE 318BF

### マーキング



### 電気的接続図

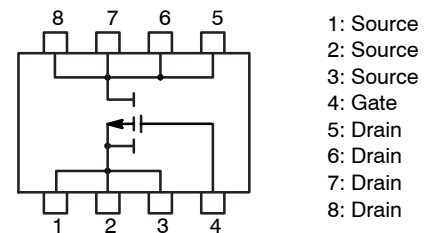

### ORDERING INFORMATION

Device	パッケージ名	最小梱包単位†
ECH8308-TL-H	SOT-28FL / ECH8 (Pb-Free and Halide Free)	3000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, [BRD8011/D](http://BRD8011/D).

# ECH8308

## 電气的特性 ELECTRICAL CHARACTERISTICS (Ta = 25°C)


項目	記号	条件	定格値			Unit
			Min	Typ	Max	
ドレイン・ソース降伏電圧	$V_{(BR)DSS}$	$I_D = -1 \text{ mA}, V_{GS} = 0 \text{ V}$	-12	-	-	V
ドレイン・ソースしゃ断電流	$I_{DSS}$	$V_{DS} = -12 \text{ V}, V_{GS} = 0 \text{ V}$	-	-	-10	$\mu\text{A}$
ゲート・ソースもれ電流	$I_{GSS}$	$V_{GS} = \pm 8 \text{ V}, V_{DS} = 0 \text{ V}$	-	-	$\pm 10$	$\mu\text{A}$
ゲート・ソースしゃ断電圧	$V_{GS(off)}$	$V_{DS} = -6 \text{ V}, I_D = -1 \text{ mA}$	-0.4	-	-1.3	V
順伝達アドミタンス	$ y_{fs} $	$V_{DS} = -6 \text{ V}, I_D = -4.5 \text{ A}$	12	21	-	S
ドレイン・ソース間オン抵抗	$R_{DS(on)1}$	$I_D = -4.5 \text{ A}, V_{GS} = -4.5 \text{ V}$	-	9.2	12.5	$\text{m}\Omega$
	$R_{DS(on)2}$	$I_D = -2 \text{ A}, V_{GS} = -2.5 \text{ V}$	-	14	20	$\text{m}\Omega$
	$R_{DS(on)3}$	$I_D = -1 \text{ A}, V_{GS} = -1.8 \text{ V}$	-	22	33	$\text{m}\Omega$
入力容量	$C_{iss}$	$V_{DS} = -6 \text{ V}, f = 1 \text{ MHz}$	-	2300	-	pF
出力容量	$C_{oss}$		-	720	-	pF
帰還容量	$C_{rss}$		-	550	-	pF
ターンオン遅延時間	$t_d(on)$	指定回路において	-	24	-	ns
立ち上がり時間	$t_r$		-	130	-	ns
ターンオフ遅延時間	$t_d(off)$		-	230	-	ns
下降時間	$t_f$		-	195	-	ns
総ゲート電荷量	$Q_g$	$V_{DS} = -6 \text{ V}, V_{GS} = -4.5 \text{ V}, I_D = -10 \text{ A}$	-	26	-	nC
ゲート・ソース電荷量	$Q_{gs}$		-	4.0	-	nC
ゲート・ドレイン電荷量	$Q_{gd}$		-	7.1	-	nC
ダイオード順電圧	$V_{SD}$	$I_S = -10 \text{ A}, V_{GS} = 0 \text{ V}$	-	-0.79	-1.2	V

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

(参考訳)

製品パラメータは、特別な記述が無い限り、記載されたテスト条件に対する電气的特性で示しています。異なる条件下で製品動作を行った時には、電气的特性で示している特性を得られない場合があります。

### スイッチングタイム測定回路図

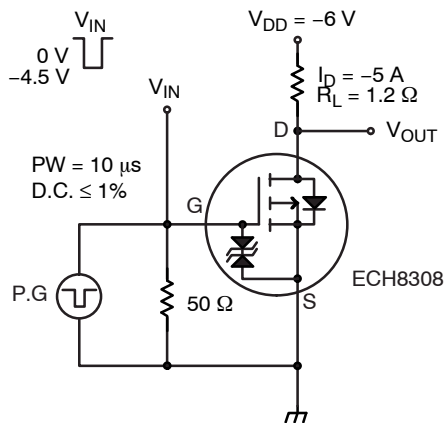

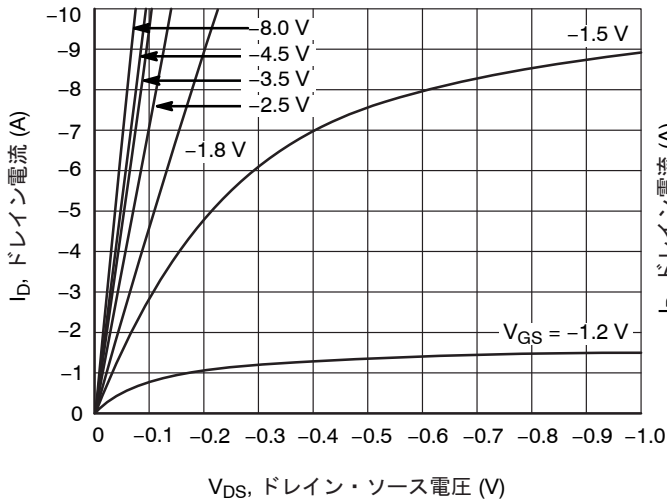


Figure 1.  $I_D - V_{DS}$

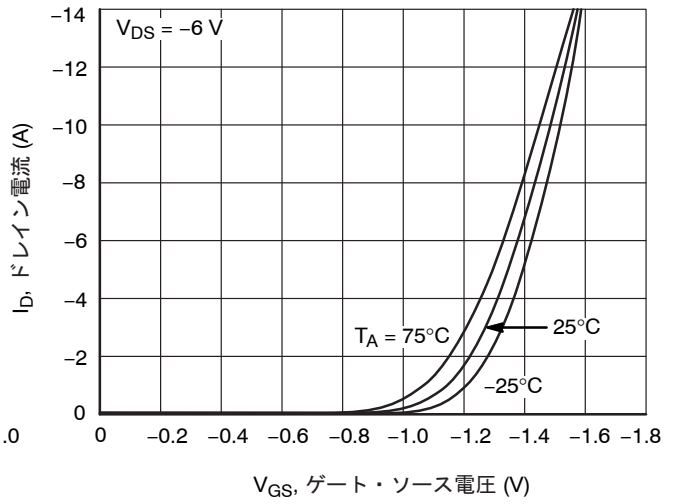


Figure 2.  $I_D - V_{GS}$

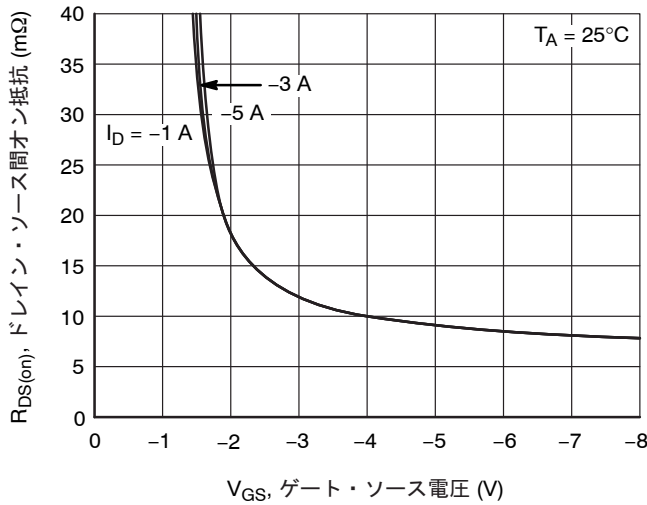


Figure 3.  $R_{DS(on)} - V_{GS}$

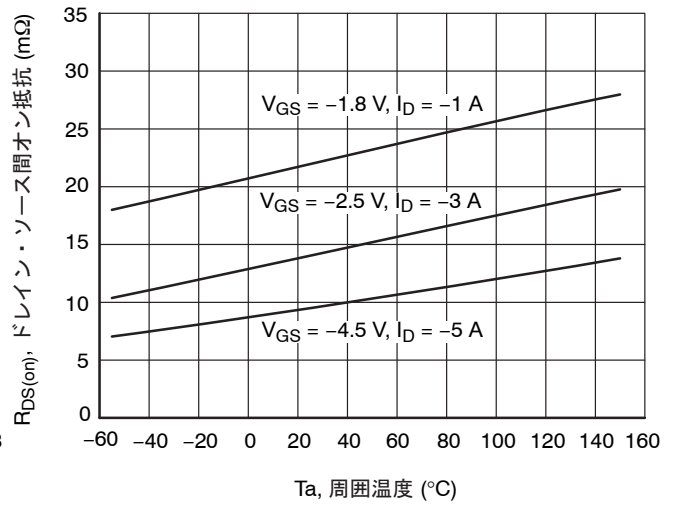


Figure 4.  $R_{DS(on)} - T_a$

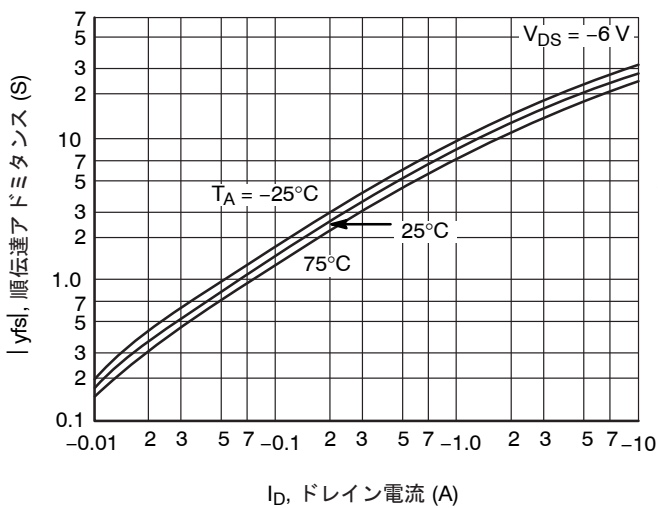


Figure 5.  $|y_{fs}| - I_D$



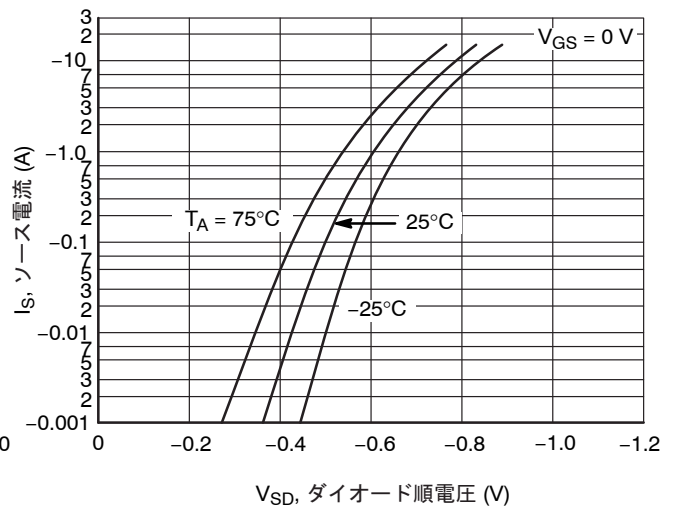


Figure 6.  $I_S - V_{SD}$


# ECH8308

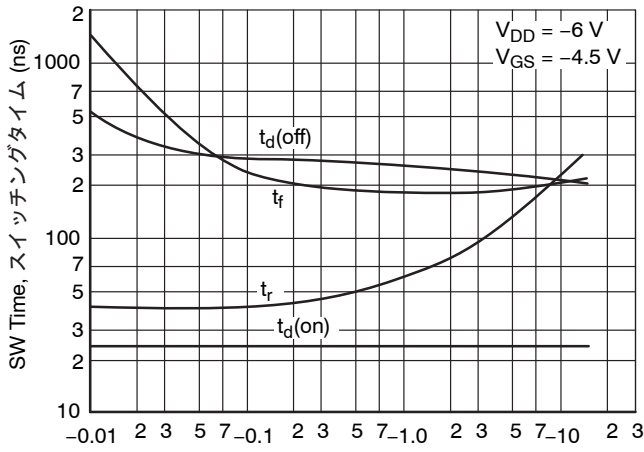


$I_D$ , ドレイン電流 (A)  
Figure 7. SW Time -  $I_D$

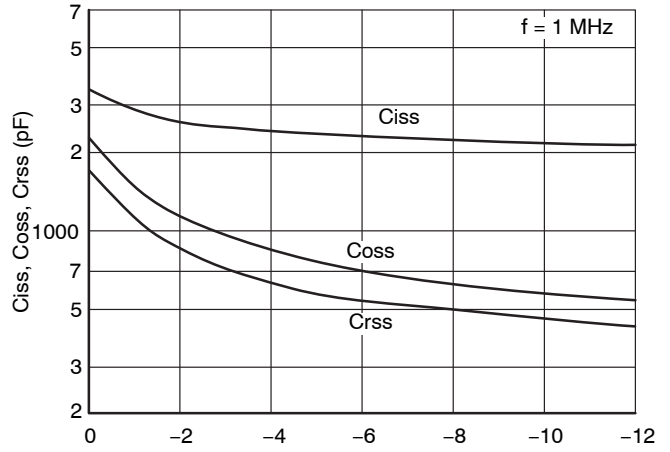


$V_{DS}$ , ドレイン・ソース電圧 (V)  
Figure 8. Ciss, Coss, Crss -  $V_{DS}$

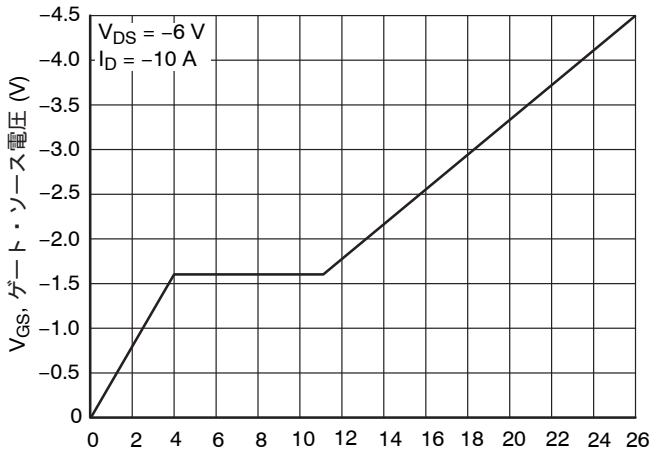

$Q_g$ , 総ゲート電荷量 (nC)  
Figure 9.  $V_{GS}$  -  $Q_g$

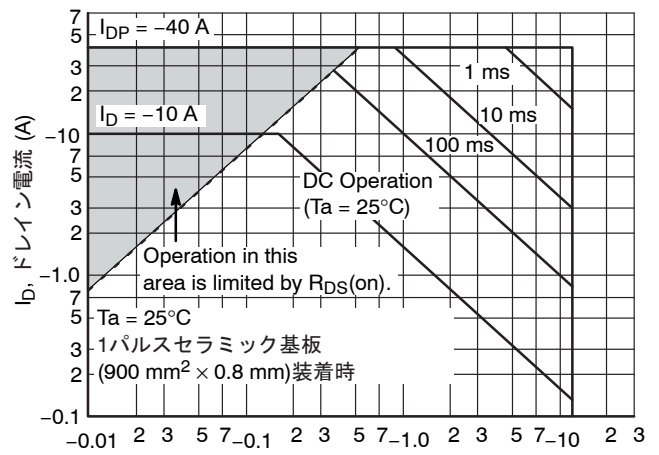



$V_{DS}$ , ドレイン・ソース電圧 (V)  
Figure 10. ASO

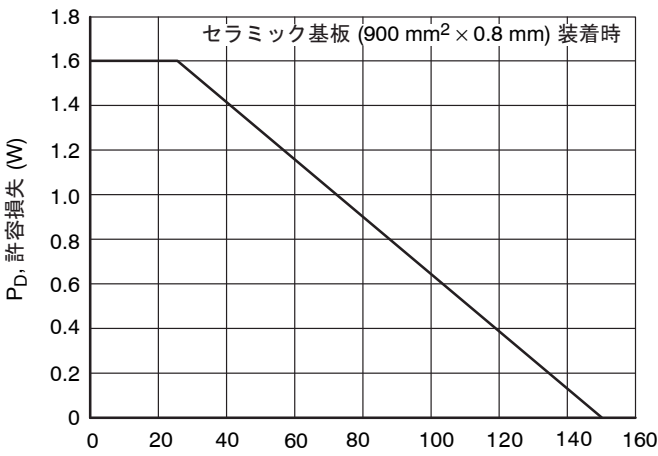

$T_a$ , 周囲温度 ( $^\circ\text{C}$ )  
Figure 11.  $P_D$  -  $T_a$

**SOT-28FL / ECH8**  
**CASE 318BF**  
**ISSUE O**

DATE 31 MAR 2012

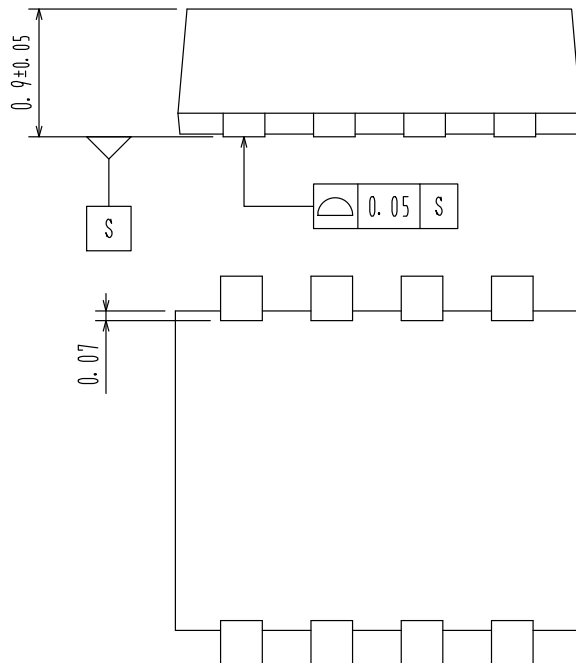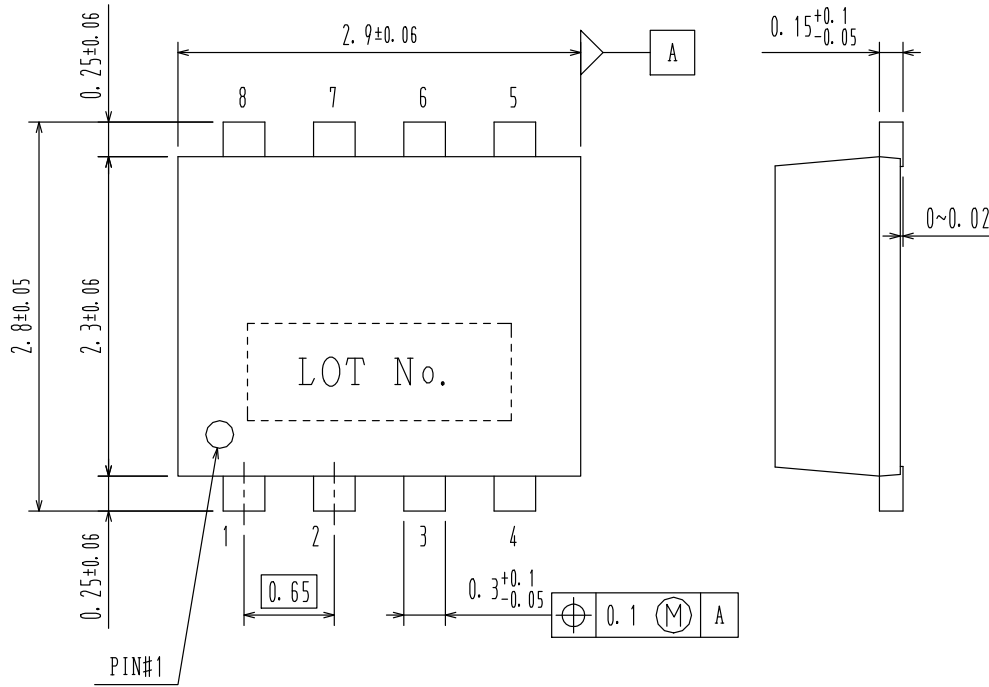

<b>DOCUMENT NUMBER:</b>	<b>98AON78700E</b>	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
<b>DESCRIPTION:</b>	<b>SOT-28FL / ECH8</b>	<b>PAGE 1 OF 1</b>

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

---

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at [www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)